

भारतीय गैर न्यायिक INDIA NON JUDICIAL

दस हजार रुपये

रु.  
10000



Rs.  
10000

TEN THOUSAND RUPEES


കേരളം കേരल KERALA

A 139360


**AGREEMENT NO.243/ KIIDC/2020-21 DATED 26.02.2021**

CONTRACT AGREEMENT entered into on this 26<sup>th</sup> day of February Two Thousand Twenty One between Sri. Joseph R.V, Rathappillyil House, Kattayad P.O, Vellamunda, Wayanad-670731, Kerala. for and on behalf of the Company (hereinafter called the Company) on the other part for the work " KIIFB-KIIDC Thalassery Heritage Project Phase I – Harbour Town circuit Jagannath Temple Streetscape, Revival of Pond Compound Wall, Electrification at Thalassery Kannur" by the former as per accompanying agreement, accepted tender with conditions of contract, plans, accepted schedule with specifications approved by Chief Engineer, M/s Kerala Irrigation Infrastructure Development Corporation Ltd., PARVATHY, T.C. 84/3 (Old 36/1), NH66 Service Road, Enjakkal Jn, Chakai P.O., Thiruvananthapuram – 695 024., which form part of this agreement.

R.V. Joseph. 




Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024

No. 8503 Date 17/2/21  
Value Rs. 10000  
Sold to 



A.V. N.  17/02/21 



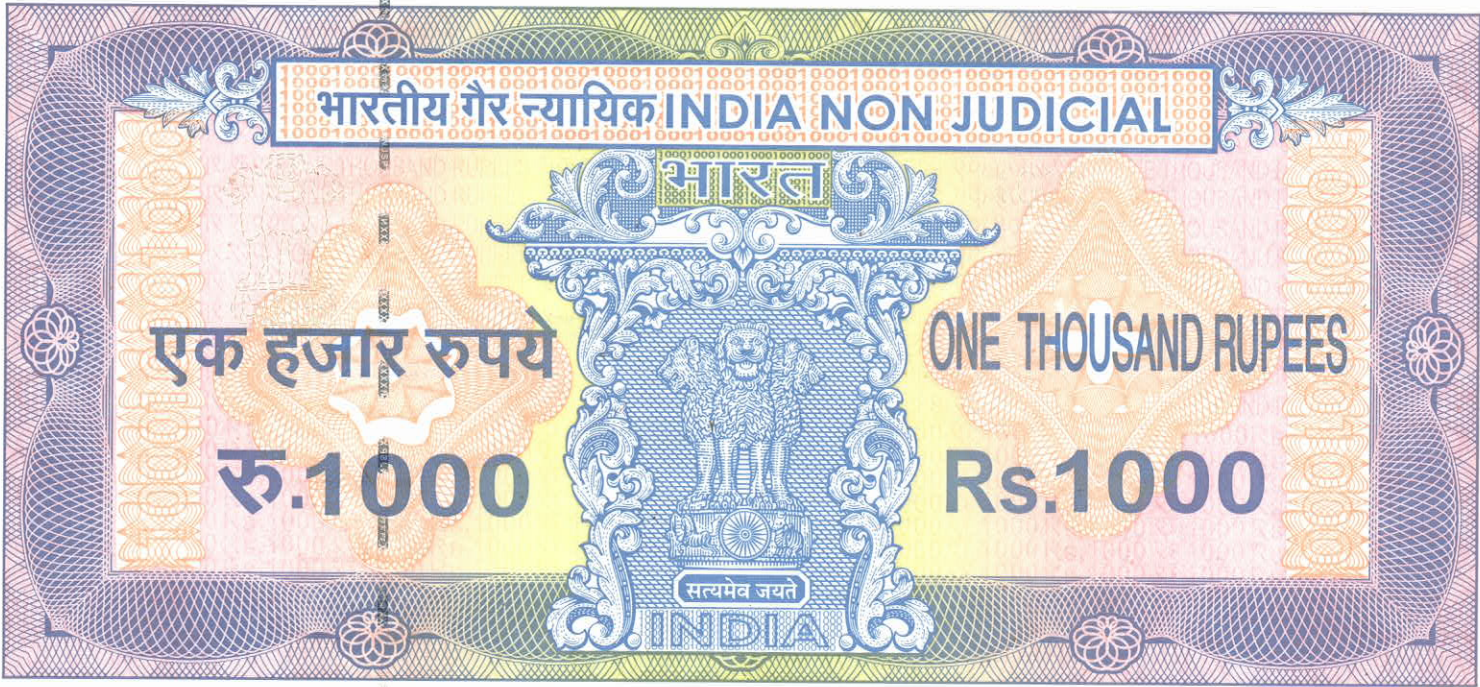

കേരളം കേരल KERALA

W 272745

Signed and delivered by the above mentioned Sri. Joseph R.V,  
Rathappulliyil House, Kattayad P.O, Vellamunda, Wayanad-670731, Kerala.

*Signature*  
Chief Engineer

Kerala Urban Infrastructure  
Development Corporation Ltd.  
In the presence of:-  
Thiruvananthapuram - 695024

R.V. Joseph *Signature*  
Contractor

1.

2.

No. 8505 Date 17/12/21

Value Rs. 1000/-

Sold to Jincy Thomas


Taluk Special Stamp Vendor

*Signature*



*Signature*



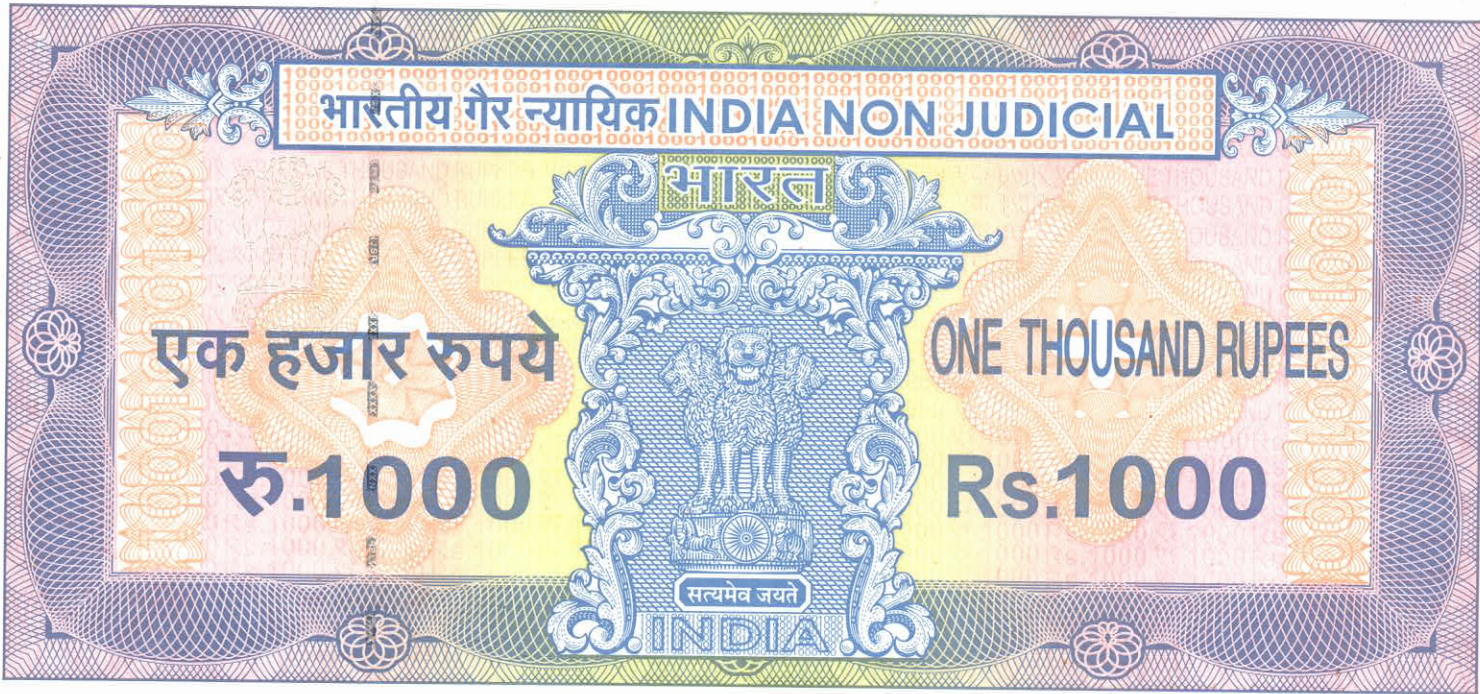

കേരളം കേരल KERALA

W 272746

Signed and delivered by Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Limited, PARVATHY, T.C. 84/3 (Old 36/1), NH66 Service Road, Enjakkal Jn, Chakai P O, Thiruvananthapuram – 695024, for and on behalf of the Company.

*Received*

Chief Engineer,  
Kerala Irrigation Infrastructure Development Corporation Limited  
(for and on behalf of the Company)

In the presence of:-

- 1.
- 2.

R.V. Joseph *[Signature]*

No. 8506 Date 17/12/21

Value Rs. 1000/-

Sold to: *[Signature]*


Jincy Thomas

Taluk Special Stamp Vendor *[Signature]*



*[Handwritten signature]*



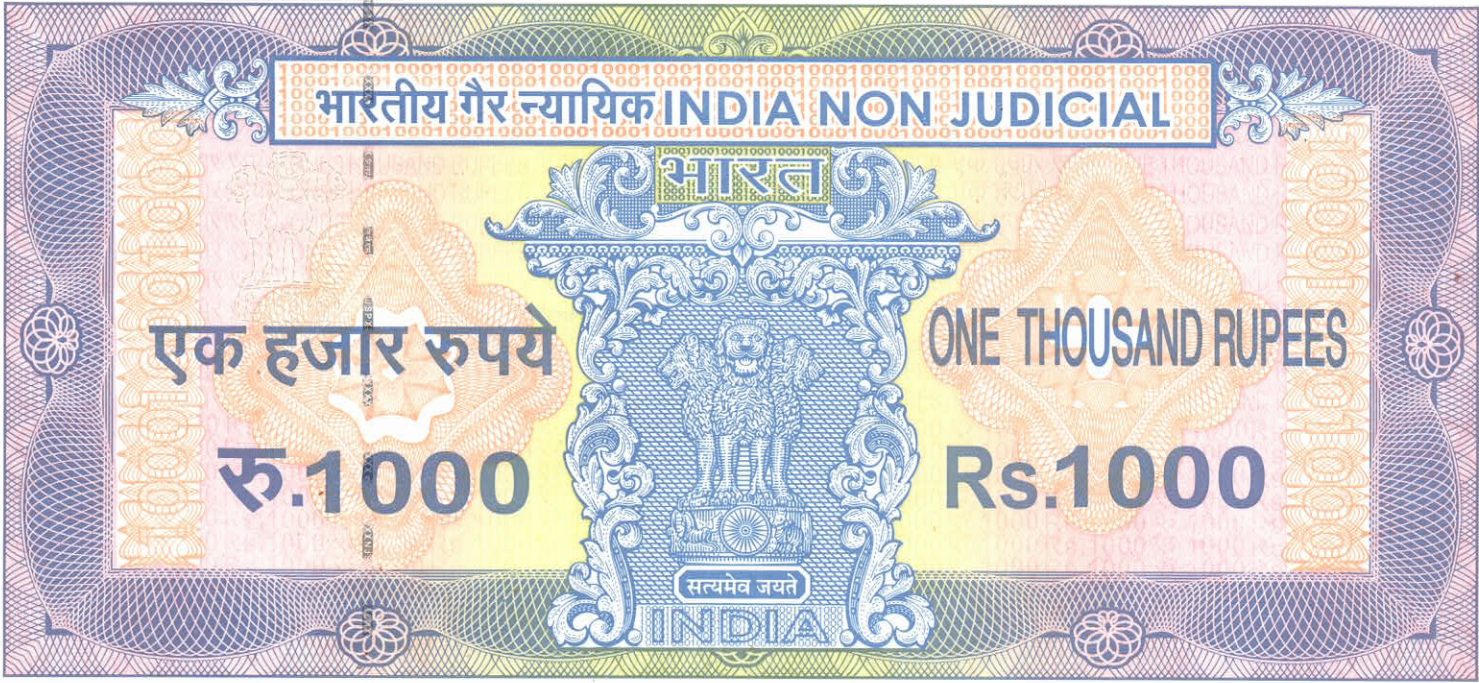

കേരളം കേരल KERALA

W 272747

**MEMORANDUM OF WORK TENDERED**

Name of work	KIIFB-KIIDC Thalassery Heritage Project - Phase I - Harbour Town circuit Jagannath Temple Streetscape, Revival of Pond Compound Wall, Electrification at Thalassery Kannur
Estimate P.A.C	Rs. 1,35,54,233/-
Contract P.A.C	Rs. 1,48,17,938.56
Date of starting	The work should be started within 10 days after executing agreement

R.v. Joseph *[Signature]*

*[Signature]*  
 Chief Engineer  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024

No. 8507 Date 17/12/21  
 Value Rs. 1000  
 Sold to: *[Signature]*  
 Jincy Thomas  
 Taluk Special Stamp Vendor



*[Handwritten signature and scribbles]*







കേരളം കേരल KERALA

G 783299

Date of completion	12 months from the date of handing over the site
Performance Guarantee	Treasury FD for an amount of Rs. 2,23,000/- JL 0036795 dated 17.02.2021 for 2 years  Term Deposit Advice from South Indian Bank for an amount of Rs. 2,23,000/- dated 17.02.2021 valid upto 17.02.2023


R. V. Joseph.   
Contractor

  
Chief Engineer  
KIIDC Limited

No. 8508 Date 17.12.21  
Value Rs. 500  
Sold to:   
Jincy Thomas  
Taluk Special Stamp Vendor  
Mananthavady 

  
R. V. 



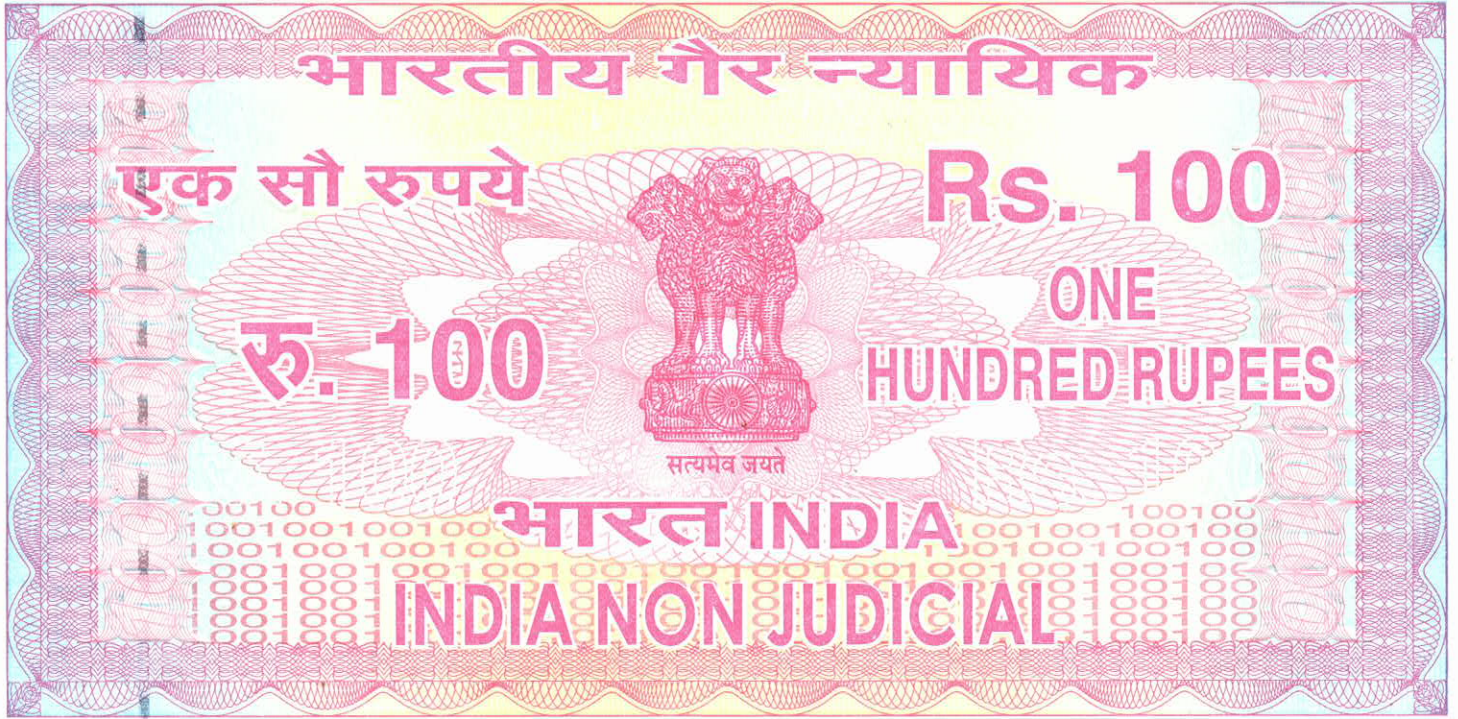


കേരളം കേരल KERALA


CT 606897

**FORM OF NOMINATION**

I, **I. R. V. Joseph, Rathappulliyil House, Kattayad P.O, Vellamunda, Wayanad** do hereby nominate and authorize Joby Joseph, Rathappulliyil House, Kattayad P.O, Vellamunda, Wayanad to receive all or any sum found due to me under the terms of contract (Agreement No..243.../KIIDC/2020-21 dated 26/02/2021 and details of contract in the event of my death before

R. v. Joseph 


  
Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024

No. 8509 Date 17/2/21  
Value Rs. 100/-  
Sold to ജിൻസി തോമസ്  
Jincy Thomas  
Taluk Special Stamp Vendor  
Mananthavady 







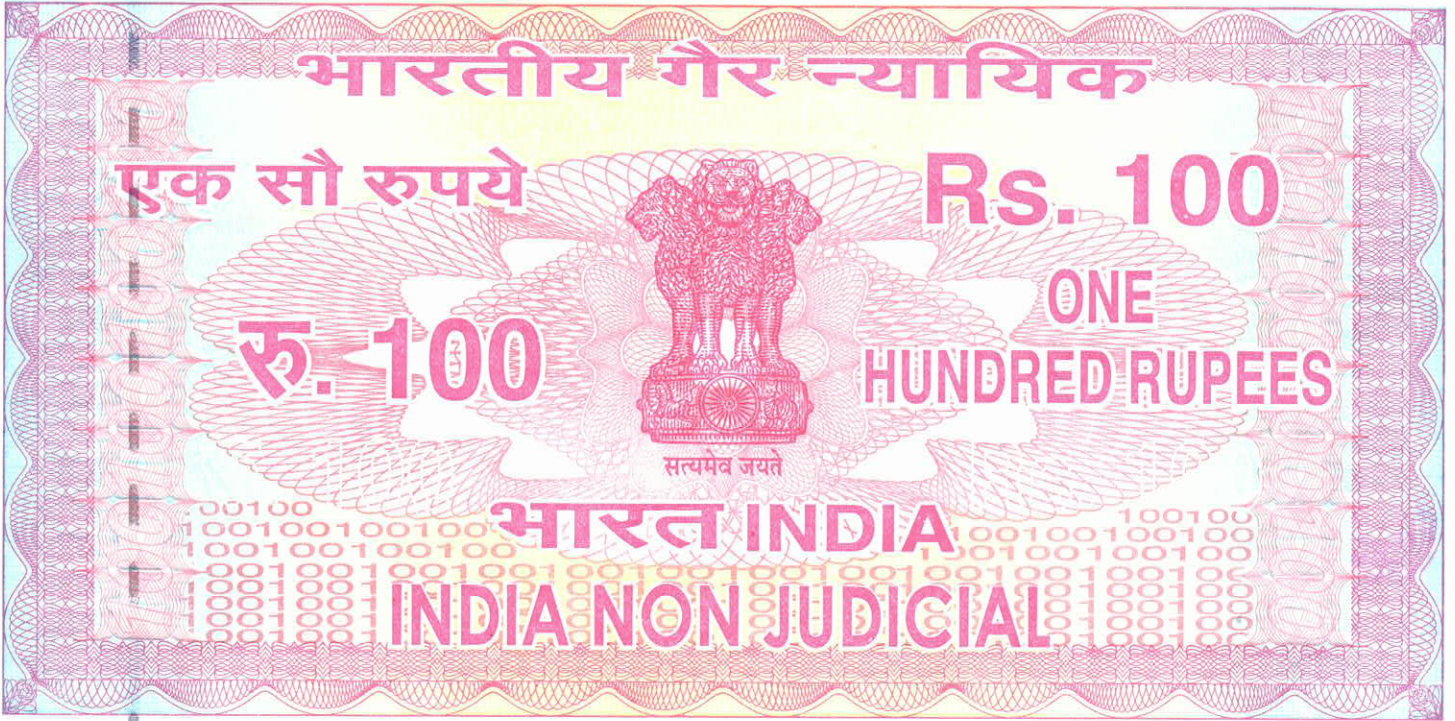

കേരളം കേരल KERALA

CT 606898

the amount has become payable or having become but has become payable or having become payable but has not been paid.

Signature

Name: R.V. Joseph.

Address: Rattappally (17)  
Mattayal. p.o.  
Vellamunda.

*Cleared*  
Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Muvvanthapuram - 695024

No. 8510 Date 17/12/10

Value Rs. 100/-

Sold to. Jincy Thomas


Jincy Thomas

Taluk Special Stamp Vendor


Mananthavady

*Jincy*

A.V.

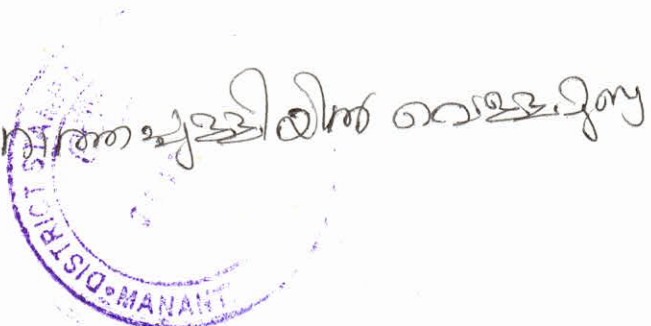



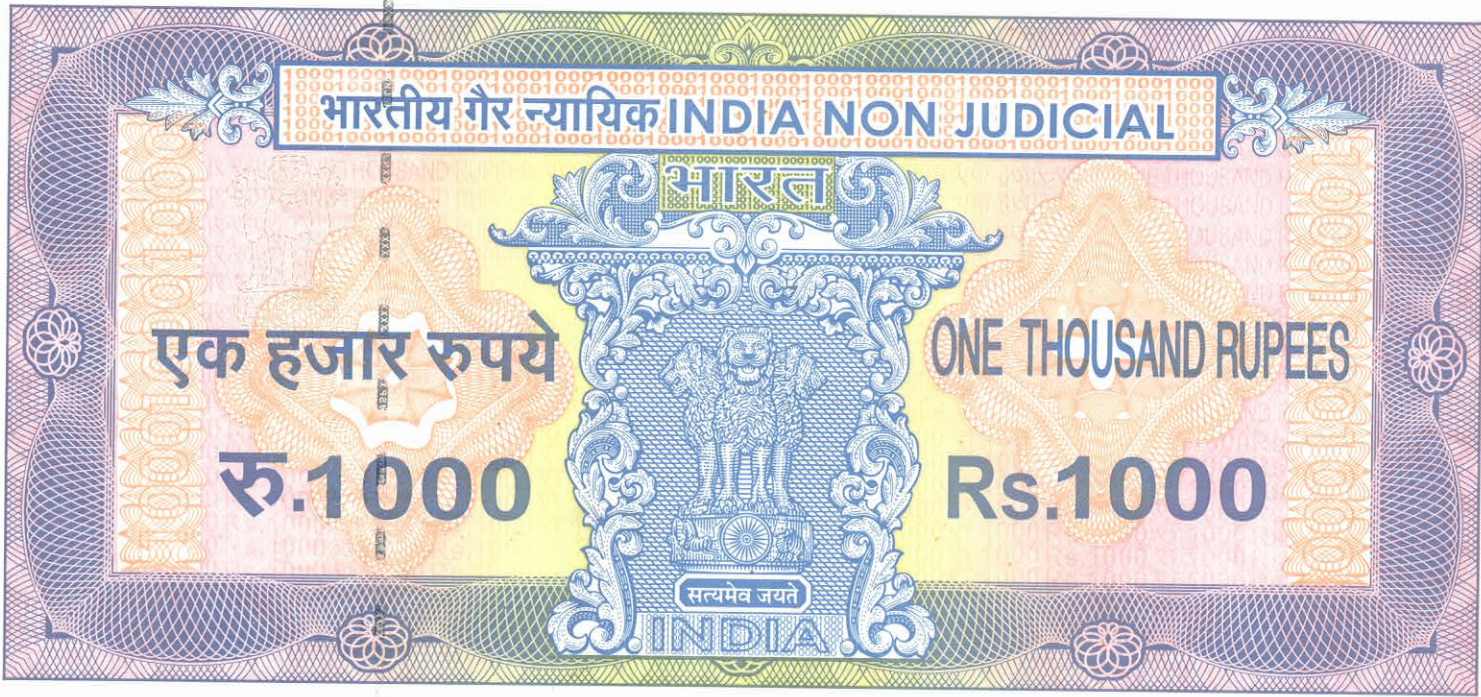

കേരളം കേരल KERALA

W 272744

In the presence of witness:

- 1.
- 2.

*Sheeareet*  
Chief Engineer,  
KIIDC Limited  
Thiruvananthapuram

*R.V. Joseph*

No. 8504 Date 17/2/21

Value Rs. 1000

Sold to *R.V. Narayan*

Jincy Thomas


Taluk Special Stamp Vendor

Mananthavady




*R.V. Narayan*



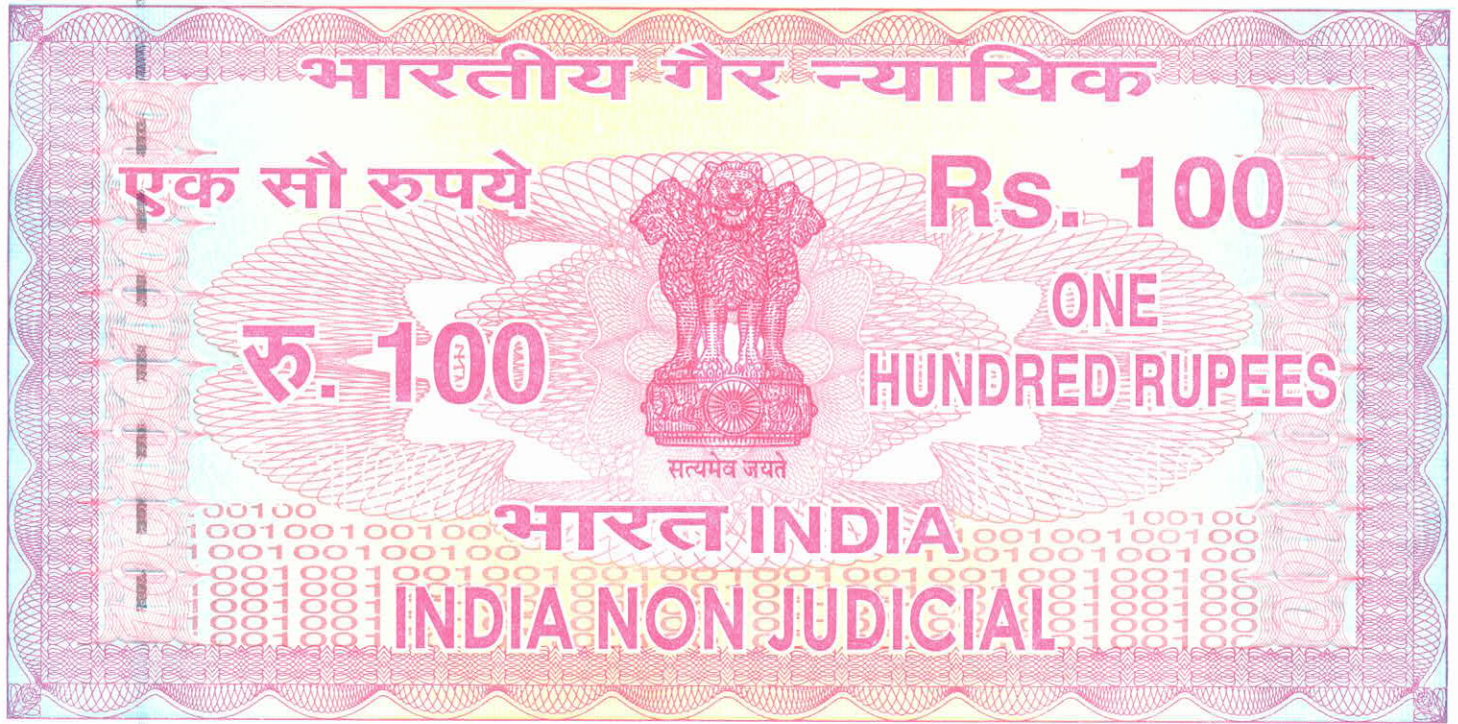

കേരളം കേരल KERALA

CT 606899

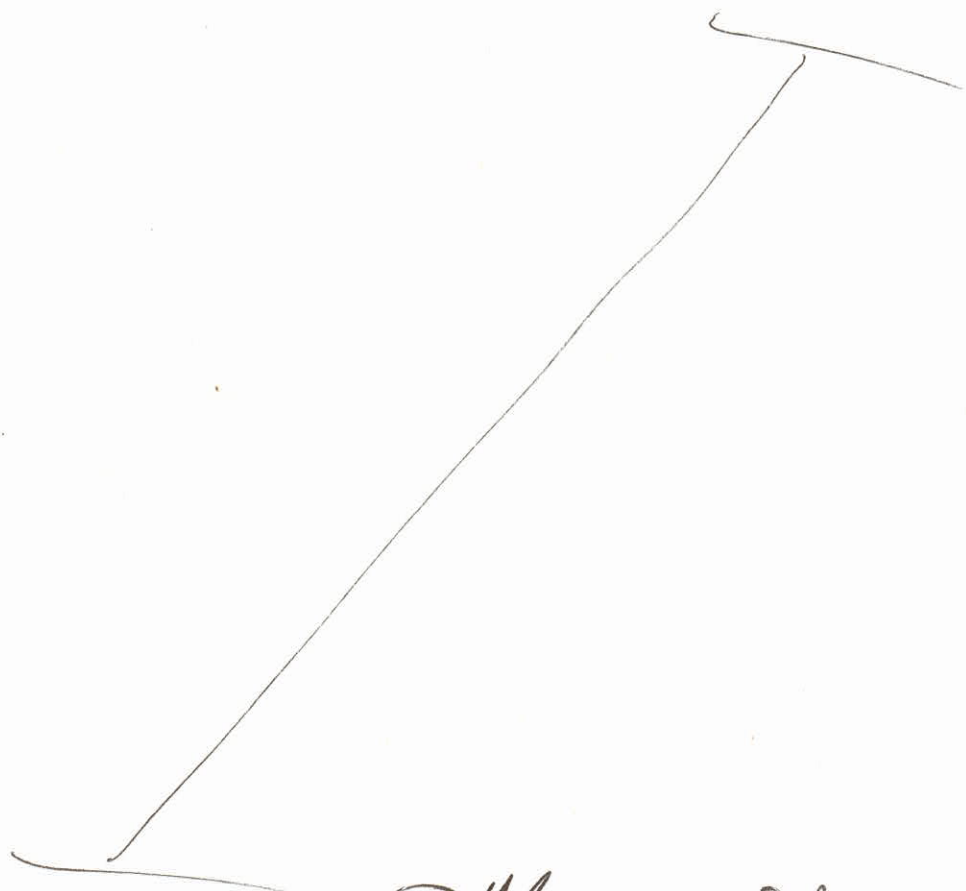

R.V. Joseph. *[Signature]*

*[Signature]*  
Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024

No. 8511 Date 17/12/21

Value Rs. 100/-

Sold to *[Signature]*

Jincy Thomas

Taluk Special Stamp Vendor


Mananthavady

*[Signature]*



R.V. *[Signature]*



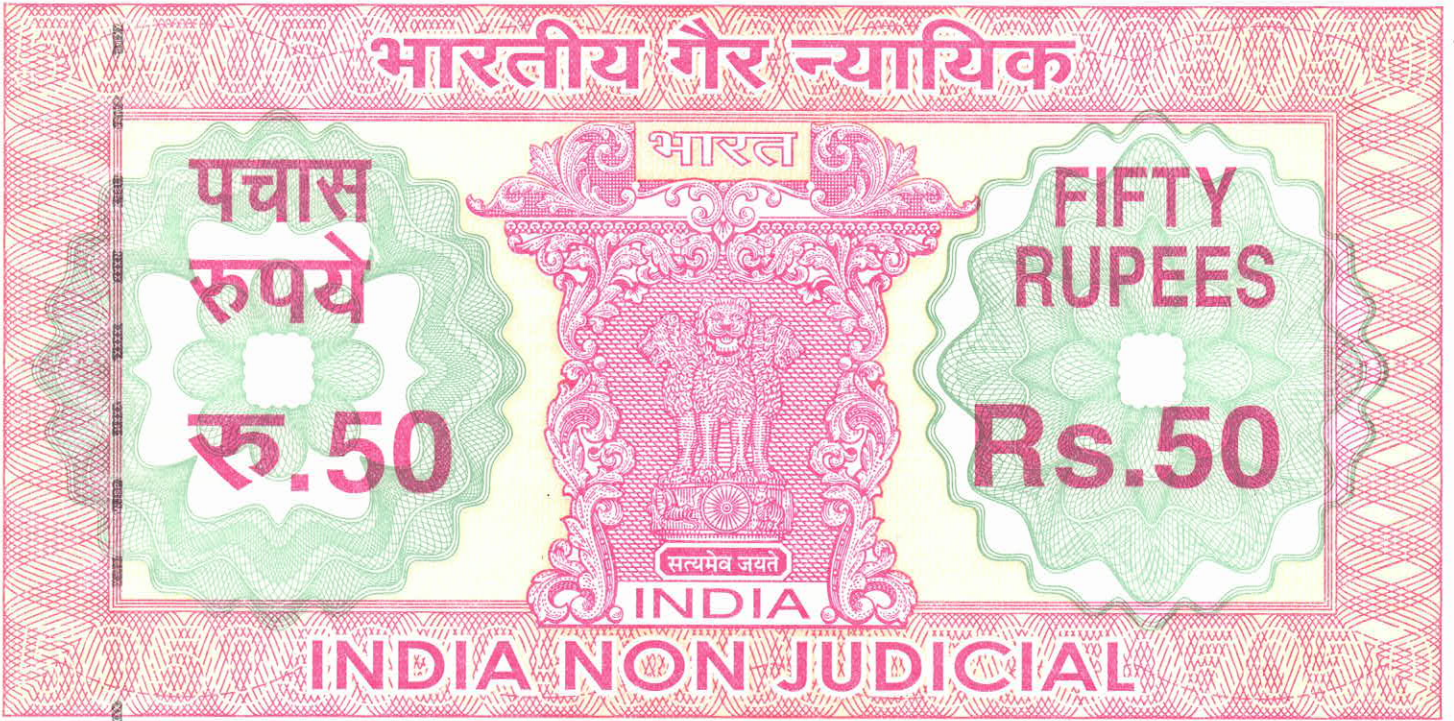

കേരളം കേരल KERALA

BU 044201



A.V. Joseph 



Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024

No. 8512 Date 17/12/19

Value Rs. 50

Sold to 

Jincy Thomas

Taluk Special Stamp Vendor

Mananthavady





A.V.  



Validate

Print

Help

### Item Rate BoQ

Tender Inviting Authority: KERALA IRRIGATION INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

Work Name : KIIFB PROJECT-THALASSERY HERITAGE PROJECT- PHASE 1 - Harbour Town Circuit - Jagannath Temple (Streetscape, Revival of pond, Compound wall, Electrification) at Thalassery, Kannur

Contract No: KIIDC/Tender/347/2020-21

Bidder Name : JOSEPH .R.V

#### PRICE SCHEDULE

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevent columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only )

NUMBER	TEXT #	NUMBER #	TEXT #	NUMBER	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate	BASIC RATE In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT Without Taxes	TOTAL AMOUNT In Words
1	2	4	5	6	13	53	55
1	APPENDIX A: PATHWAY						
1.01	16.77 : Scarifying the existing bituminous road surface to a depth of 50 mm and disposal of scarified material within all lifts and lead upto 1 km ( by mechanical means).	831.6280	sqm		5.2000	4324.47	INR Four Thousand Three Hundred & Twenty Four and Paise Forty Seven Only
1.02	16.1 : Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.	983.1790	sqm		129.0000	126830.09	INR One Lakh Twenty Six Thousand Eight Hundred & Thirty and Paise Nine Only

*Joseph R.V*  
 Chief Engineer  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024



1.03	16.78.2 : Construction of granular sub- base by Providing close graded Material conforming to specifications, mixing in a mechanical mix plant at OMC, Carriage of mixed material by tippers to work site, for all leads & lifts, spreading in uniform layers of specified thickness with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge. With material conforming to Grade-II (size range 53 mm to 0.075 mm ) having CBR Value-25	196.6400	cum		3000.0000	589920.00	INR Five Lakh Eighty Nine Thousand Nine Hundred & Twenty Only
1.04	od44712/2020_2021 : Providing and laying rough finish granite stone (sadarhalli) flooring in required design and pattern (180 x 90 cm or nearest) in linear as well as curvilinear all complete as per the architectural drawing with 50mm thick stone slab over 50mm thick base of stone aggregates of size 6mm etc. complete as specified and as directed by the engineer in charge	983.1790	sqm		3435.0000	3377219.87	INR Thirty Three Lakh Seventy Seven Thousand Two Hundred & Nineteen and Paise Eighty Six Only
1.05	2.8.1 : Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil	43.3010	cum		238.0000	10305.64	INR Ten Thousand Three Hundred & Five and Paise Sixty Four Only
1.06	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	3.2340	cum		6440.0000	20826.96	INR Twenty Thousand Eight Hundred & Twenty Six and Paise Ninety Six Only
1.07	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	50.7070	cum		8550.0000	433544.85	INR Four Lakh Thirty Three Thousand Five Hundred & Forty Four and Paise Eighty Five Only
1.08	5.1.3 : Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level:1:2:4 (1 cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	14.2560	cum		8345.0000	118966.32	INR One Lakh Eighteen Thousand Nine Hundred & Sixty Six and Paise Thirty Two Only



Chief Engineer  
*(Signature)*  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024



1.09	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth levelThermo - Mechanically Treated bars of grade Fe-500D or more	285.1200	kilogram		80.0000	22809.60	INR Twenty Two Thousand Eight Hundred & Nine and Paise Sixty Only
1.1	5.9.2 : Centering and shuttering including strutting, etc. and removal of form for:Walls (any thickness) including attached pilasters, butteresses, plinth and string courses etc.	611.5840	sqm		545.0000	333313.28	INR Three Lakh Thirty Three Thousand Three Hundred & Thirteen and Paise Twenty Eight Only
1.11	od186835/2020_2021 : Supply and providing suitable size foundation bolts and nuts with washers for lamp poles, bollards, outdoor lamp fittings etc.	330.0000	kilogram		100.0000	33000.00	INR Thirty Three Thousand Only
1.12	od186833/2020_2021 : Supplying & fixing Cast iron lamp pole of height 4mtrs. base dia.250mm and top dia.75mm (weight 110kg. Arox. with provision for fixing MCB and cably entry/exit at bottom made of FG15 grade cast iron with MRF apoxy black finish over a coat of zinc chromate base on existing concrete foundation using foundation bolts, nuts and washers.&lt;br&gt;	66.0000	each		22920.0000	1512720.00	INR Fifteen Lakh Twelve Thousand Seven Hundred & Twenty Only
1.13	od171858/2020_2021 : Setting up of a document with Photographs of site before and after the work. The item includes developing of a photographs to a size of 6" X 4" and preparing a booklet.	20.0000	each		317.0000	6340.00	INR Six Thousand Three Hundred & Forty Only
2	<b>APPENDIX B: Revival of pond</b>						
2.01	15.2.1 : Demolishing cement concrete manually / by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in-Charge.Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	178.0000	cum		1440.0000	256320.00	INR Two Lakh Fifty Six Thousand Three Hundred & Twenty Only
2.02	16.1 : Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.	890.0000	sqm		128.0000	113920.00	INR One Lakh Thirteen Thousand Nine Hundred & Twenty Only



*Beena*  
**Chief Engineer**  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



2.03	16.78.1 : Construction of granular sub- base by Providing close graded Material conforming to specifications, mixing in a mechanical mix plant at OMC, Carriage of mixed material by tippers to work site, for all leads & lifts, spreading in uniform layers of specified thickness with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge. With Material conforming to Grade - I ( size range 75 mm to 0.075 mm) having CBR Value- 30	133.5000	cum		3000.0000	400500.00	INR Four Lakh Five Hundred Only
2.04	od222819/2019_2020 : Providing and laying rough finish granite stone (sadarhalli) flooring in required design and pattern (180 x 90 cm or nearest) in linear as well as curvilinear all complete as per the architectural drawing with 50mm thick stone slab over 50mm thick base of stone aggregates size varying from 6mm to 40 mm etc. complete as specified and as directed by the engineer in charge	890.0000	sqm		3435.0000	3057150.00	INR Thirty Lakh Fifty Seven Thousand One Hundred & Fifty Only
2.05	16.69 : Providing and laying at or near ground level factory made kerb stone of M-25 grade cement concrete in position to the required line, level and curvature jointed with cement mortar 1:3 ( 1 cement : 3 coarse sand) , including making joints with or without grooves ( thickness of joints except at sharp curve shall not to more than 5 mm), including making drainage opening wherever required complete etc. as per direction of Engineer-in-charge ( length of finished kerb edging shall be measured for payment ). ( Precast C.C. kerb stone shall be approved by Engineer-in-Charge)	10.2000	cum		7245.0000	73899.00	INR Seventy Three Thousand Eight Hundred & Ninety Nine Only
2.06	14.43 : Removing white or colour wash by scrapping and sand papering and preparing the surface smooth including necessary repairs to scratches etc. complete.	510.8420	sqm		12.0000	6130.10	INR Six Thousand One Hundred & Thirty and Paise Ten Only
2.07	13.48.3 : Finishing with Deluxe Multi surface paint system for interiors and exteriors using primer as per manufacturers specifications: Painting Steel work with Deluxe Multi Surface Paint to give an even shade. Two or more coat applied @ 0.90 ltr/10 sqm over an under coat of primer applied @ 0.80 ltr/10 sqm of approved brand and manufacture	510.8420	sqm		122.0000	62322.72	INR Sixty Two Thousand Three Hundred & Twenty Two and Paise Seventy Two Only
3	APPENDIX C: Compound wall						

APPENDIX C: Compound wall




*Clearance*  
 Engineer  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024



3.01	2.8.1 : Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.All kinds of soil	93.6580	cum		240.0000	22477.92	INR Twenty Two Thousand Four Hundred & Seventy Seven and Paise Ninety Two Only
3.02	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	15.6230	cum		6440.0000	100612.12	INR One Lakh Six Hundred & Twelve and Paise Twelve Only
3.03	50.6.7.1 : Laterite masonry with neatly dressed laterite stone of size 40x20x15cm or nearest size in cement mortar 1:6 for foundation and basement including all cost of materials, labour charges etc.	78.0510	cum		6820.0000	532307.82	INR Five Lakh Thirty Two Thousand Three Hundred & Seven and Paise Eighty Two Only
3.04	od44737/2020_2021 : Exposed laterite masonry with neatly dressed laterite stone of size 30x20x20cm or nearest size in cement mortar 1:6for superstructure above plinth level upto floor two level including cost,conveyance labour charge complete etc	140.4900	sqm		17920.0000	2517580.80	INR Twenty Five Lakh Seventeen Thousand Five Hundred & Eighty and Paise Eighty Only
4	<b>APPENDIX K: Trees and Street furniture</b>						
4.01	od91762/2020_2021 : Supplying and planting of approved trees species of a height 2.0m to 2.5m, at the specified location as shown in the drawing.Rate shall include Cost of plants, soil work inclusive of red soil, sand and manure mix staking and planting of trees sapling, replacement of dead trees and for providing a pit size 75 x 75 x 75 cm and maintainance till the completion of project work. .Plumeria Alba	12.0000	each		3120.0000	37440.00	INR Thirty Seven Thousand Four Hundred & Forty Only
4.02	od91764/2020_2021 : Supplying and planting of approved Hedge Plants at required spacing as shown in drawing. Rate shall include cost of plants soil work,manure and fertilizers used in top dressing, chemical and machanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. Ixora noragrart	100.0000	each		232.0000	23200.00	INR Twenty Three Thousand Two Hundred Only



  
**Chief Engineer**  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024



4.03	od91765/2020_2021 : Supplying and planting of approved shrubs at required spacing as shown in drawing. Rate shall include cost of plants soil work,manure and fertilizers used in top dressing, chemical and machanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. <u>Tabernaemontana green</u>	100.0000	each		235.0000	23500.00	INR Twenty Three Thousand Five Hundred Only
4.04	od91766/2020_2021 : Supplying and planting of approved shrubs at required spacing as shown in drawing. Rate shall include cost of plants soil work,manure and fertilizers used in top dressing, chemical and machanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. <u>Oleander tall</u>	25.0000	each		229.0000	5725.00	INR Five Thousand Seven Hundred & Twenty Five Only
4.05	od91767/2020_2021 : Supplying and planting of approved shrubs at required spacing as shown in drawing. Rate shall include cost of plants soil work,manure and fertilizers used in top dressing, chemical and machanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. <u>Gardenia</u>	25.0000	each		229.0000	5725.00	INR Five Thousand Seven Hundred & Twenty Five Only
4.06	od91771/2020_2021 : Supplying, fitting, fixing and handing over the garden benches (Victoria Bench - Product Code :PGGD18) or equivalent as specified in the drawings of make ARIHANT or equivalent acceptable to engineer -in - chief, with prior approval, fully complete at site with all accessories, labours, power supply etc.	5.0000	each		6358.0000	31790.00	INR Thirty One Thousand Seven Hundred & Ninety Only
5	<b>Appendix I : Electrification</b>						
5.01	od131064/2020_2021 : Supply and fixing 32A, 4way connector in the existing junction box	66.0000	each		86.0000	5676.00	INR Five Thousand Six Hundred & Seventy Six Only
5.02	od131065/2020_2021 : Supply and fitting 167x125mmx82mm ) Sintex cable junction box ( on existing lamp post using suitable clamps.	66.0000	each		792.0000	52272.00	INR Fifty Two Thousand Two Hundred & Seventy Two Only
5.03	od131066/2020_2021 : Supply and fixing cast iron post top lantern 30W inbuilt LED of size 540x450mm with powder coated finish and giving connection as required.	66.0000	each		7375.0000	486750.00	INR Four Lakh Eighty Six Thousand Seven Hundred & Fifty Only



  
**Chief Engineer**  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024



5.04	90.12.1.3 : Supply & laying of one number PVC insulated and PVC sheathed armoured aluminium power cable of 1.1KV grade of the following sizes in ground including excavation of trench of size 35 x 75 cm, refilling the trench etc. as required but excluding sand cushioning and protective covering (in ordinary soil).2 core 10 sq mm	500.0000	metre		385.0000	192500.00	INR One Lakh Ninety Two Thousand Five Hundred Only
5.05	90.12.2.3 : Supply and laying of one number additional PVC insulated and PVC sheathed armoured aluminium power cable of 1.1KV grade of the following sizes in ground in the same trench in one tier horizontal formation including widening the trench by 20 cm, refilling the trench etc. as required but excluding sand cushioning and protective covering (in ordinary soil) 2 core 10 sq mm	100.0000	metre		264.0000	26400.00	INR Twenty Six Thousand Four Hundred Only
5.06	90.16.1.3 : Supply and drawing bare earthing conductors of the following sizes along with wiring/ cables and giving connection as required. 3.15 mm copper conductor ( 10 SWG)	600.0000	metre		62.0000	37200.00	INR Thirty Seven Thousand Two Hundred Only
5.07	9.1.2 : Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed / XLPE aluminium conductor cable of 1.1 KV grade as required.2 X 10 sq. mm (19mm)	133.0000	set		225.0000	29925.00	INR Twenty Nine Thousand Nine Hundred & Twenty Five Only
5.08	90.12.7.3 : Supply, laying and clamping of 1 no. PVC insulated and PVC sheathed armoured aluminium power cable, 1.1 KV grade of the following sizes using clamps noted along with the cables, spacing of clamps not exceeding 60cms, making good the damages , colour washing etc. as required.2 core 10 sq mm with factory made clamp	5.0000	metre		223.0000	1115.00	INR One Thousand One Hundred & Fifteen Only
5.09	1.17.3 : Supplying and drawing following sizes of FRLS PVC insulated copper conductor, single core cable in the existing surface / recessed steel/ PVC conduit as required.3 X 1.5 sq.mm	350.0000	metre		72.0000	25200.00	INR Twenty Five Thousand Two Hundred Only
5.1	2.3.3 : Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 V, on surface/ recess, complete with tinned copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/Isolator/12 way Double door	1.0000	each		1650.0000	1650.00	INR One Thousand Six Hundred & Fifty Only




Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



5.11	2.10.1 : Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required.Single pole	6.0000	each		248.0000	1488.00	INR One Thousand Four Hundred & Eighty Eight Only
5.12	2.10.3 : Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required.Double pole	1.0000	each		666.0000	666.00	INR Six Hundred & Sixty Six Only
5.13	2.14.1 : Supplying and fixing following rating, double pole, (single phase and neutral), 240 volts, residual current circuit breaker (RCCB), having a sensitivity current upto 300 milliampere in the existing MCB DB complete with connections, testing and commissioning etc. as required.25 amps	1.0000	each		2375.0000	2375.00	INR Two Thousand Three Hundred & Seventy Five Only
5.14	90.12.9.2 : Supplying, laying and jointing of the following sizes of double wall corrugated (DWC) pipes made out of HDPE conforming to IS 14930 Part II for mechanical protection to underground power cables with all required accessories in ground in the existing trench 50/38 mm or nearest size	400.0000	metre		155.0000	62000.00	INR Sixty Two Thousand Only
5.15	90.12.9.3 : Supplying, laying and jointing of the following sizes of double wall corrugated (DWC) pipes made out of HDPE conforming to IS 14930 Part II for mechanical protection to underground power cables with all required accessories in ground in the existing trench 63/50 mm or nearest size	100.0000	metre		165.0000	16500.00	INR Sixteen Thousand Five Hundred Only
5.16	5.3 : Earthing with G.I. earth plate 600 mm X 600 mm X 6 mm thick including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe of 2.7 metre long etc. (but without charcoal/ coke and salt ) as required.	2.0000	set		5150.0000	10300.00	INR Ten Thousand Three Hundred Only
5.17	5.13 : Providing and laying earth connection from earth electrode with 4.00 mm dia copper wire in 15mm dia G.I. pipe from earth electrode including connection with copper thimble excavation and re-filling as required.	20.0000	metre		260.0000	5200.00	INR Five Thousand Two Hundred Only
<b>Total in Figures</b>						<b>14817938.56</b>	INR One Crore Forty Eight Lakh Seventeen
<b>Quoted Rate in Words</b>					<b>INR One Crore Forty Eight Lakh Seventeen Thousand Nine Hundred &amp; Thirty Eight and Paise Fifty</b>		



  
 Chief Engineer  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024