

കേരളം കേരल KERALA

A 722701

AGREEMENT NO.....283...../KIIDC/2021-22 DATED.....21.10.2021.....

CONTRACT AGREEMENT entered into on this 21<sup>st</sup> day of October Two Thousand Twenty One between M/S V J RAJU AND CO., VALUPARAMBIL BUILDING, PAZHAYARIKANDOM P.O., IDUKKI – 685 606 (hereinafter called the Contractor) on the one part and the Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Ltd. (KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackai P.O, Thiruvananthapuram – 695 024 for and on behalf of the Company (hereinafter called the Company) on the other part for the work for and on behalf of the Company (hereinafter called the Company) on the other part for the work “Eco-lodge Idukki additional work III ( Construction of Modular kitchen, Drainage, Parking Yard, Side wall, woodwork polishing, Electrical works and Generator Room)” by the former as per accompanying agreement, accepted tender with conditions of contract, plans, accepted schedule with specifications approved by Chief Engineer, Kerala Irrigation Infrastructure

For V J RAJU & Co.

*Jatishu*  
Managing Partner

*Allexand.*

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024


29 SEP 2021

No. 14578

V. J. Raju & Co.  
Valuparambil  
Pazhayarikandom.

ARVA REJA  
STAMP VENDOR



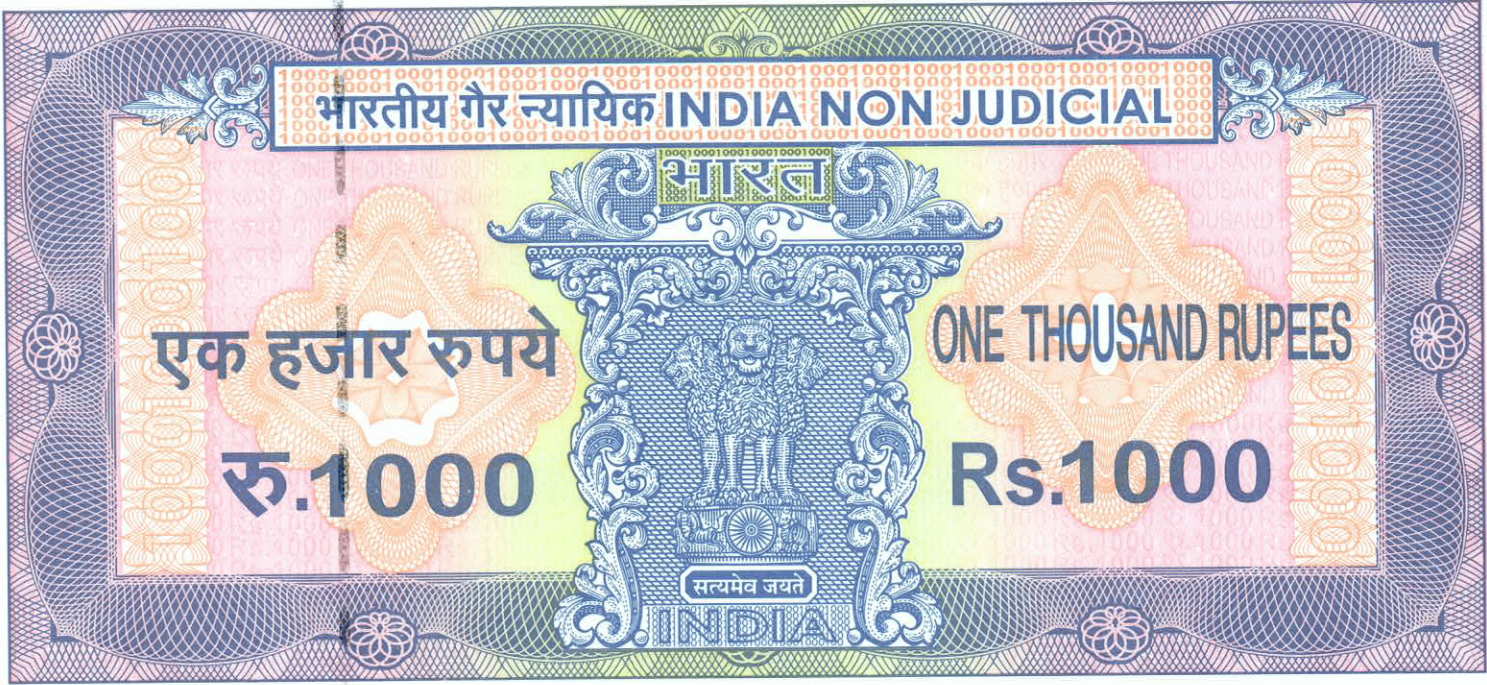

കേരളം കേരल KERALA

G 618206

Development Corporation Ltd. (KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackai P.O, Thiruvananthapuram – 695 024, which form part of this agreement.

Signed and delivered by the above mentioned M/S V. J, RAJU AND CO., VALUPARAMBIL BUILDING, PAZHAYARIKANDOM P.O., IDUKKI – 685 606

*Aravind*

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.

For V J RAJU & Co.

*Aravind*  
Managing Partner  
Contractor

In the presence of: Thiruvananthapuram - 695024

1. AKASH P UNNI, POOMKUDIYILCHU  
CHELACHUKADU P.O CHELACHUKADU  
IDUKKI, Pin : 685606
2. Sukanya V Raj  
CPE-R7, KIIDC

*Aravind*

*Sukanya*




No. 14581

V. J. Raju & Co.  
Valuparambil  
Pazhayarikandom

ARYA NEMA  
STAMP VENDOR  
CHERUTHONY



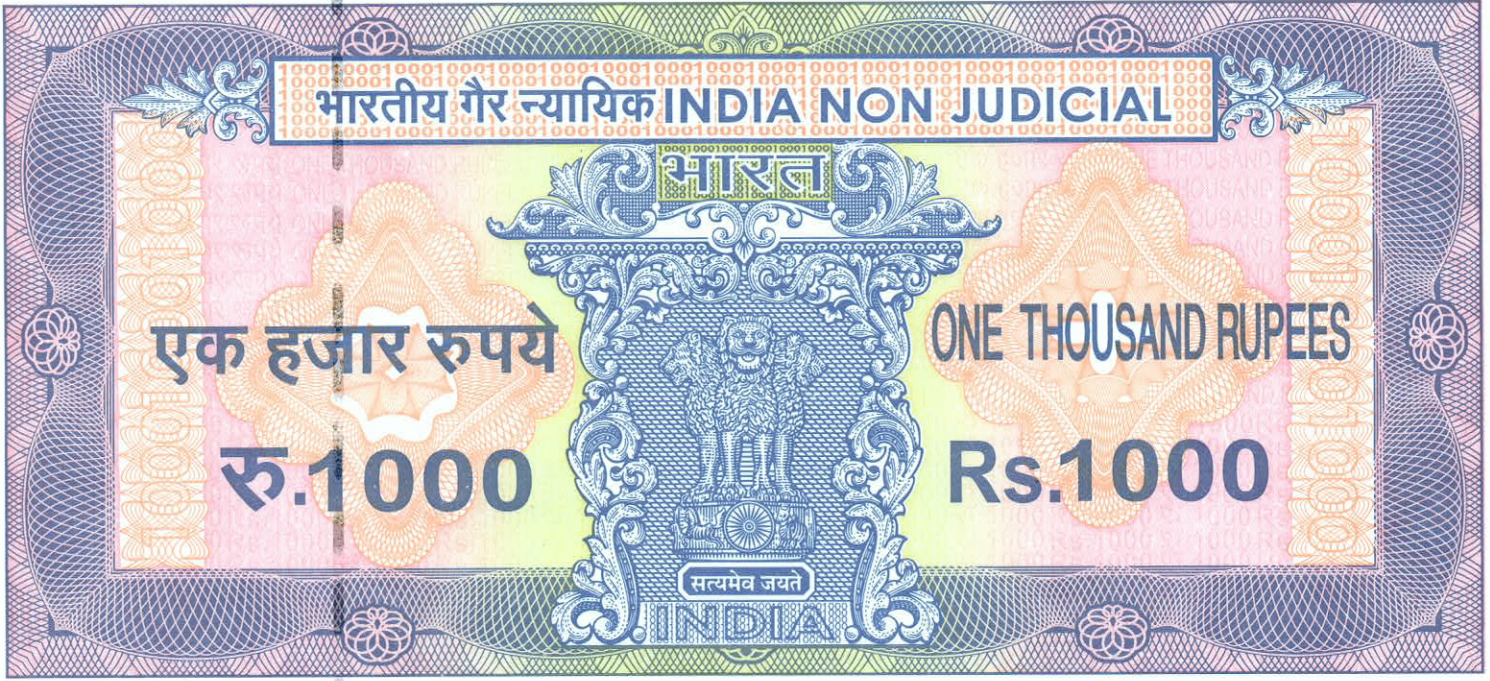

കേരളം केरल KERALA

G 618204

Signed and delivered by Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Ltd. (KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackai P.O, Thiruvananthapuram – 695 024, for and on behalf of the Company.

*[Handwritten Signature]*

**Chief Engineer**  
Kerala Irrigation Infrastructure  
Development Corporation Limited  
(for and on behalf of the Company)

In the presence of:

1. *Rumar S Kemerat*
2. *Shaveen . V*  
KIIDC, CPE-21 *[Handwritten Signature]*

For V J RAJU & Co.

*[Handwritten Signature]*  
Managing Partner

07 OCT 2021




No. 14575

12.10.2021

*V.J. Raju & Co*  
*Valaparambil*  
*Palhayanorkandam*

ARYA REMA  
STAMP VENDOR  
CHERITHONK



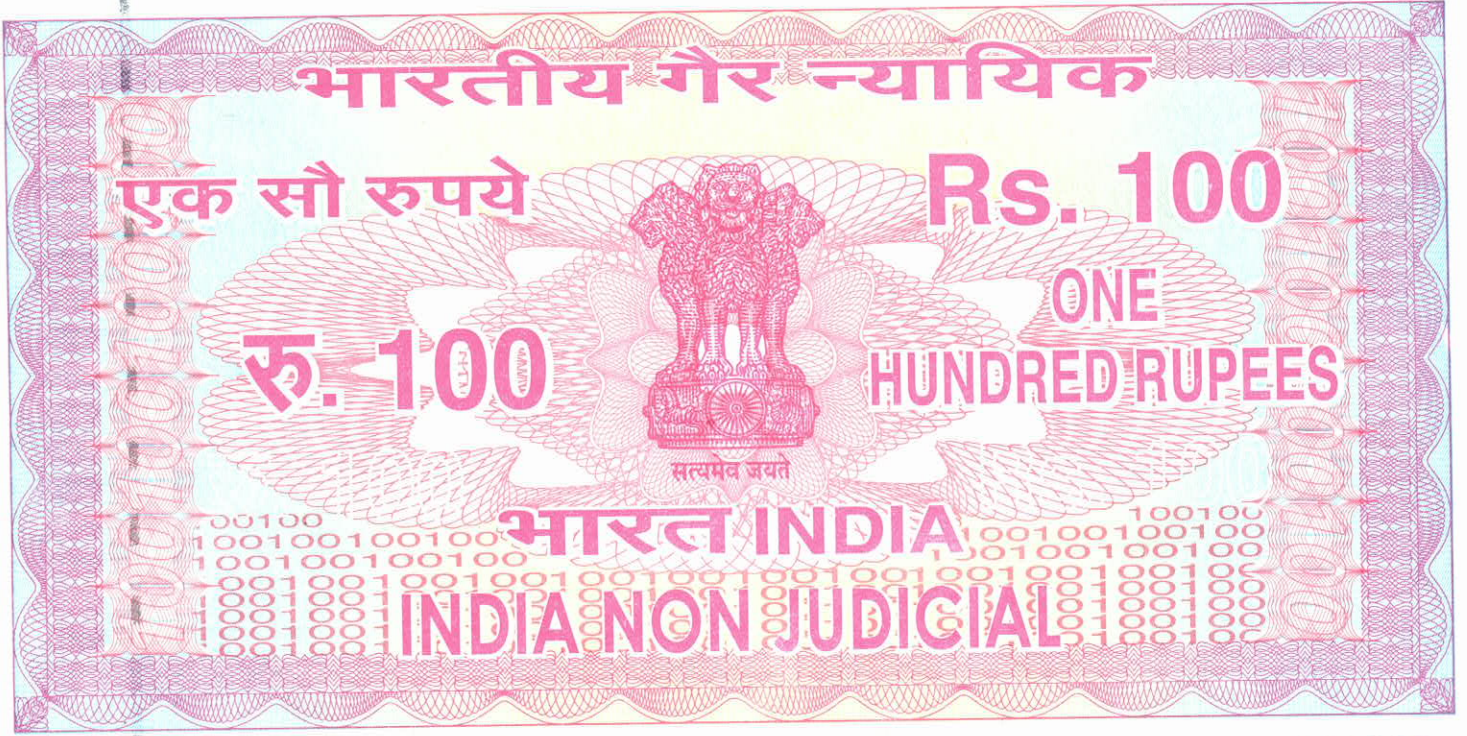

കേരളം केरल KERALA

DC 269099

**MEMORANDUM OF WORK TENDERED**

Name of work	"Eco-lodge Idukki additional work III ( Construction of Modular kitchen, Drainage, Parking Yard, Side wall, woodwork polishing, Electrical works and Generator Room)"
Estimate P.A.C	Rs. 80,24,449/-
Contract P.A.C	Rs. 71,96,599.18
Date of starting	The work should be started within 10 days after executing agreement.
Date of completion	3 months from the date of handing over the site.

For V J RAJU & Co.  
*[Signature]*  
Managing Partner

*[Signature]*

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024




No 14586

13/10/21

V J Raju & Co  
Valuparambil Building  
Pazhayankandam

ARYA REMA  
STAMP VENDOR  
CHERUTHONY



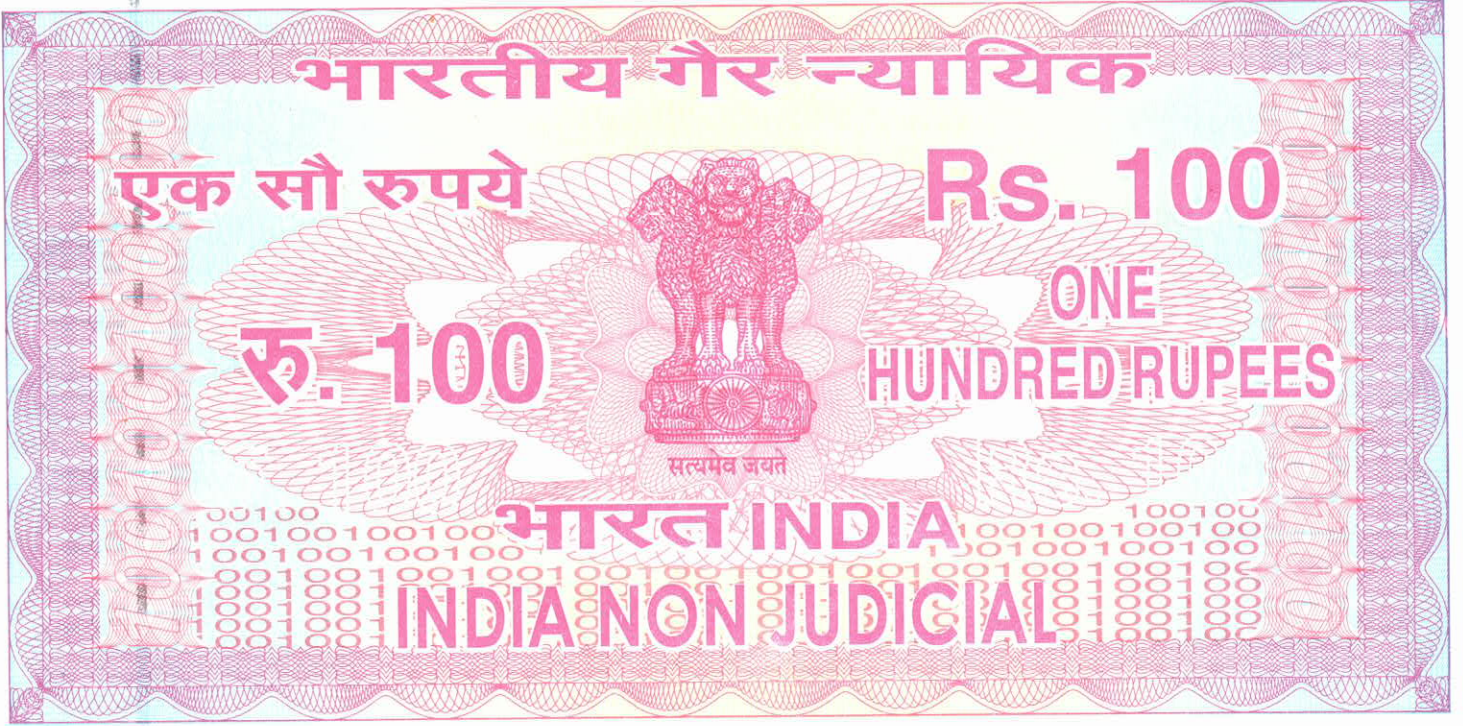

കേരളം केरल KERALA

DC 269421

Performance Guarantee	Treasury FD for an amount of Rs.1,08,000/- JL 1494742 dated 13.10.2021 for 64 Months.  Bank Guarantee from the Federal Bank Ltd., Idukki Branch Vide BG NO. IBG119377 dated 13.10.2021 for Rs. 1,08,00/- valid up to 12.02.2027.
-----------------------	--

For V J RAJU & Co.  
*[Signature]*  
Contractor Managing Partner

*[Signature]*  
Chief Engineer  
KIIDC

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Tiruvananthapuram - 695024




No 14607  
13/10/2021

V J Raju & Co.  
Valuparambil Bubby  
Pazhayankandam

*[Signature]*  
ARYA NEMA  
STAMPENDOR  
CHERUTHOMU



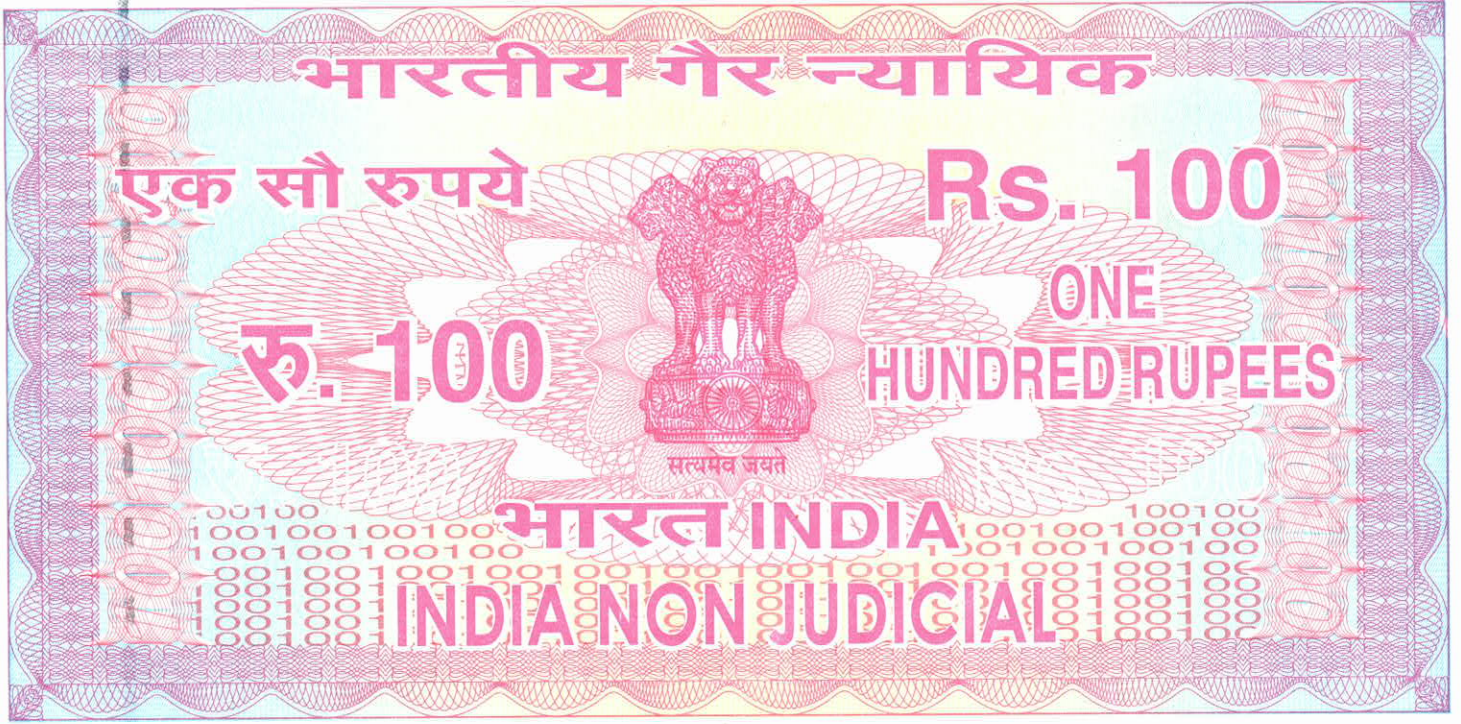

കേരളം കേരल KERALA

DC 269404

**LETTER OF UNDERTAKING**

We undertake to execute all low quoted items listed below in full as per contract terms:

- 1) Item 2.05 : 4.1.3 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:2:4 (cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)
- 2) Item 5.02 : od55105/2021\_2022 : Sanding up of existing wooden surface and applying 3 coat of Imperia sealer and 3 coat of imperia P.U. matt on wooden panels.
- 3) Item 6.01 : od58940/2021\_2022 : Supplying, providing and fixing stainless steel three sink unit of size 1.60m &times; 0.60m &times; 0.85m having bottom cross support and over head plate rack, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 4) Item 6.02 : od58941/2021\_2022 : Supplying ,providing and fixing stainless steel draining table of size 0.45m & times; 0.60m &times; 0.85m with one under shelf and bottom cross support, including all its conveyance and placing at a suitable location instructed by the engineer in charge.

For V J RAJU & Co.

Managing Partner

*Aleecaneeth*  
Chief Engineer

Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024


No 14590  
13/10/2021

V J Raju & Co.  
Valuparambil Building  
Pazhayanikandam P.O.

Stamp and signature area for the Chief Engineer.





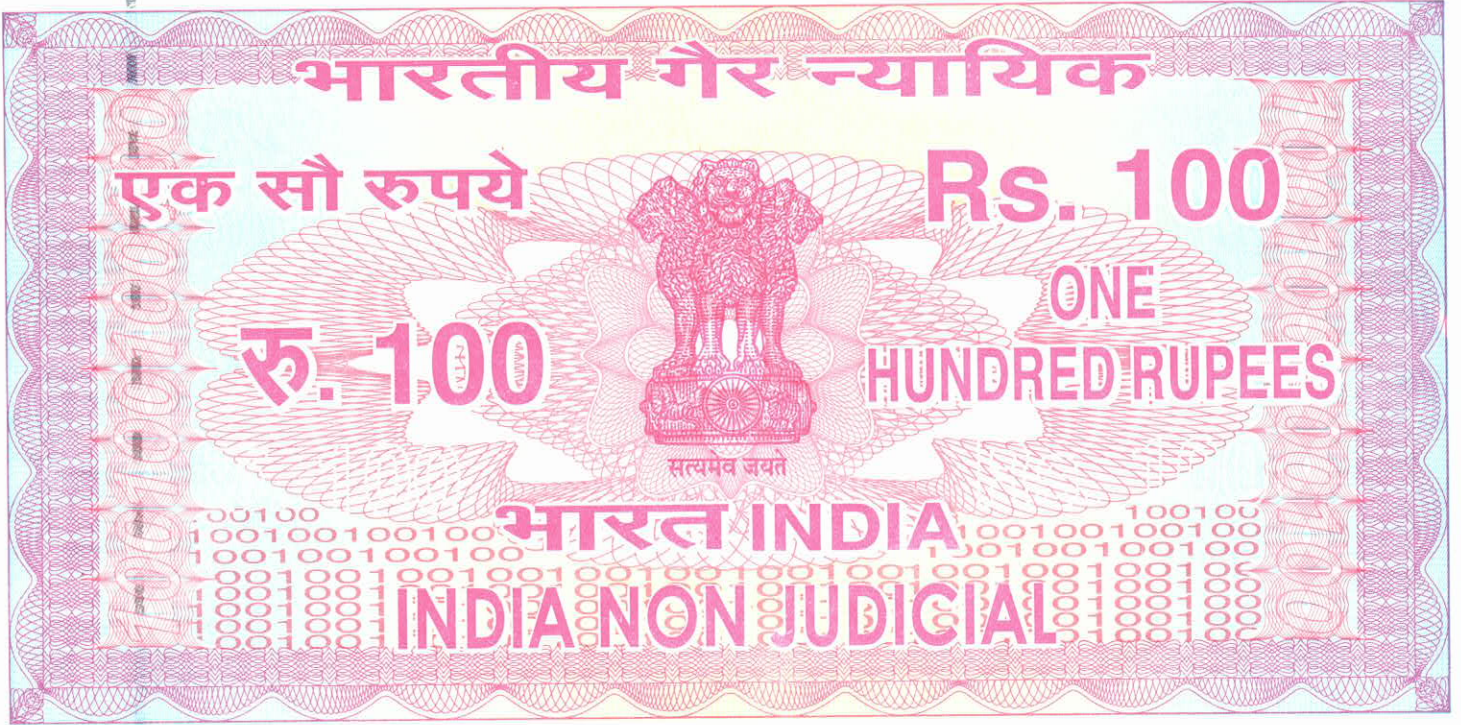

കേരളം കേരल KERALA

DC 269405

- 5) Item 6.03 : od58942/2021\_2022 : Supplying ,providing and fixing stainless steel charcoal operated tandoor oven of size 0.60m &times; 0.60m &times; 0.90m including clay pot with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 6) Item 6.04 : od58943/2021\_2022 : Supplying ,providing and fixing 20L wet grinder with stainless steel body including all its fixing including all its conveyance and placing at a suitable location instructed by the engineer in charge.&lt;br&gt;
- 7) Item 6.05 : od58944/2021\_2022 : Supplying, providing and fixing stainless steel single sink unit of size 0.60m &times; 0.60m &times; 0.85m with sunken top including bottom cross support and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 8) Item 6.06 : od58945/2021\_2022 : Supplying, providing and fixing stainless steel bainmaire counter of size 1.80m &times; 0.65m &times; 0.85m with 6 nos of 1/2 gn pan, 1 under shelf, 2 over shelves and three sides covered, including all its conveyance and placing at a suitable location instructed by the engineer in charge.

For V J RAJU & Co.

*V. J. Raju*  
Managing Partner

*Alexander*

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



No. 14591  
13/10/21


V J Raju & Co.  
Vakuparambil Building  
Pazhany enikandam P.O.

*[Signature]*  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram



- 9) Item 6.07 : od58947/2021\_2022 : Supplying and providing stainless work table of size 0.45m &times; 0.60m &times; 0.85m with a bottom shelf at a distance of 0.45m from the table top, including all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 10) Item 6.08 : od64002/2021\_2022 : Supplying and providing stainless steel work table of size 1.35m &times; 0.60m &times; 0.85m with 2 bottom shelves, including all its fittings, conveyance and placing at a suitable location instructed by the engineer in charge.
- 11) Item 6.09 : od64126/2021\_2022 : Supplying, providing and installing stainless steel 2 door frost free vertical freezer of capacity 600L with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, &frac34; hp compressor, 220v, 1ph, 2 Doors, Temp. range -15 to -20 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge
- 12) Item 6.10 : od64127/2021\_2022 : Supplying ,providing and installing stainless steel 2 door vertical chiller of capacity 600Litres with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, &frac12; hp compressor, 220v, 1ph, 2 Doors, Temp. range +02 to +06 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 13) Item 6.11 : od64319/2021\_2022 : Supplying , providing and fixing stainless steel pot wash sink of size 1.00m &times; 0.60m &times; 0.30m having bottom cross support and over head plate rack, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 14) Item 6.12 : od64397/2021\_2022 : Supplying and providing stainless steel chute table of size 1.20m &times; 0.60m &times; 0.85m with 1 no. chute hole at the centre, bottom cross support and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 15) Item 6.13 : od66351/2021\_2022 : Supplying and fixing three phase 1440rpm, 1 Hp axial fan with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 16) Item 6.14 : od66354/2021\_2022 : Supplying ,providing and fixing stainless steel three burner unit of size 1.65m &times; 0.60m &times; 0.85m with 3 nos of hp burner, one under shelf, Needle Control Valve, Copper Pigtail, drainage trap, waste collecting tray, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.

For V J RAJU & Co.  
  
Managing Partner

  
Civil Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



- 17) Item 6.15 : od66357/2021\_2022 : Supplying and installing LPG pipe line with  $\frac{1}{2}$ " TATA MS - C class pipe (3 + 3 man folding systems - total 6 cylinders), With DBC Click on adaptor, HP regulator, Connector, shut off valves, Unit Valves With frame connector, Pressure Gauge and Clamps. Including the Charge for pipe bending, Welding, painting, Pressure Testing and Labour charges guage, connecting pipes for burners etc. (charges including one year warranty ) including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 18) Item 6.16: od69276/2021\_2022 : Supplying ,providing and fixing GI Ducting for SS Hoods with 22 swg ,GI sheet including hanging rods, scaffolding charges and labour charges etc with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 19) Item 6.17 : od69277/2021\_2022 : Supplying , providing and fixing exhaust hood of size 1.80m  $\times$  0.90m  $\times$  0.45, using 22SWG 304 S S Sheet and filters with 26 SWG 304 S S Sheet, with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.
- 20) Item 8.02 : 2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed. All kinds of soil.
- 21) Item 8.03 : 4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)

For V J RAJU & Co.

  
Managing Partner



Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



**Item Rate BoQ**

Validate      Print      Help

Tender Inviting Authority: KERALA IRRIGATION INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

Work Name : Eco-lodge Idukki additional work III ( Construction of Modular kitchen, Drainage, Parking Yard, Side wall, woodwork polishing, Electrical works and Generator Room)

Contract No: KIIDC/Tender/414/2021-22

Bidder Name : V J RAJU & CO.

**PRICE SCHEDULE**

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only )

NUMBER	TEXT #	NUMBER #	TEXT #	NUMBER	NUMBER #	NUMBER #	NUMBER #	NUMBER #	TEXT #	NUMBER #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate	BASIC RATE In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT Without Taxes	TOTAL AMOUNT In Words	TOTAL AMOUNT	TEXT #	TOTAL AMOUNT	TOTAL AMOUNT	TOTAL AMOUNT	TEXT #
1	2	4	5	6	13	53	55						
1	Drainage												
1.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	232.6880	cum		202.0000	47002.98	INR Forty Seven Thousand & Two and Paise Ninety Eight Only						
1.02	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	31.8750	cum		7000.0000	223125.00	INR Two Lakh Twenty Three Thousand One Hundred & Twenty Five Only						
1.03	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 ( 1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	85.0500	cum		7200.0000	612360.00	INR Six Lakh Twelve Thousand Three Hundred & Sixty Only						
1.04	4.1.3 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:2:4 (cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	5.4460	cum		8100.0000	44112.60	INR Forty Four Thousand One Hundred & Twelve and Paise Sixty Only						

Chief Engineer  
Kerala Irrigation Infrastructure

Development Corporation Ltd.  
Thiruvananthapuram - 695024

V J RAJU & CO.  
Managing Partner



1.05	5.1.2 : Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level:1:1.5:3 (1 cement 1.5 coarse sand :3 graded stone aggregate 20 mm nominal size	1.6800 cum	8800.0000	14784.00	INR Fourteen Thousand Seven Hundred & Eighty Four Only
1.06	5.9.3 : Centering and shuttering including strutting, etc. and removal of form for:Suspended floors, roofs, landings, balconies and access platform	11.3610 sqm	767.0000	8713.89	INR Eight Thousand Seven Hundred & Thirteen and Paise Eighty Nine Only
1.07	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth levelThermo - Mechanically Treated bars of grade Fe-500D or more	184.8000 kilogram	93.0000	17186.40	INR Seventeen Thousand One Hundred & Eighty Six and Paise Forty Only
1.08	od51950/2021_2022 : Providing weep holes using PVC 75mm dia pipe including all cost of materials and labor charges etc. complete.	360.0000 each	182.0000	65520.00	INR Sixty Five Thousand Five Hundred & Twenty Only
1.09	2.31 : Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared	880.0000 sqm	14.0000	12320.00	INR Twelve Thousand Three Hundred & Twenty Only
2	<b>PARKING YARD</b>				
2.01	2.31 : Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared	1500.0000 sqm	14.0000	21000.00	INR Twenty One Thousand Only
2.02	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	1800.0000 cum	202.0000	363600.00	INR Three Lakh Sixty Three Thousand Six Hundred Only

*Severed.*


**For V J RAJU & Co.**

*[Signature]*  
Managing Partner

**Chief Engineer**  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024



2.03	16.78.1 : Construction of granular sub-base by Providing close graded Material conforming to specifications, mixing in a mechanical mix plant at OMC, Carriage of mixed material by tippers to work site, for all leads & lifts, spreading in uniform layers of specified thickness with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge. With Material conforming to Grade - I ( size range 75 mm to 0.075 mm) having CBR Value- 30	180.0000 cum			2930.0000	527400.00	INR Five Lakh Twenty Seven Thousand Four Hundred Only
2.04	od51970/2021_2022 : Providing and laying 80 mm thick factory made cement concrete interlocking paver block of M - 30 grade made by block making machine with strong vibratory compaction, of approved size, design & shape, laid in required colour and pattern over and including 50 mm thick compacted bed of 6mm stone aggregate, filling the joints with fine sand etc. all complete as per the direction of Engineer-in-charge.	600.0000 sqm			1050.0000	630000.00	INR Six Lakh Thirty Thousand Only
2.05	4.1.3 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:2:4 (cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	9.0000 cum			7506.0000	67554.00	INR Sixty Seven Thousand Five Hundred & Fifty Four Only
2.06	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	10.9800 cum			6500.0000	71370.00	INR Seventy One Thousand Three Hundred & Seventy Only
2.07	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	4.3200 cum			8800.0000	38016.00	INR Thirty Eight Thousand & Sixteen Only
2.08	4.3.2 : Centering and shuttering including strutting, propping etc. and removal of form work for: Retaining walls, return walls, (any thickness) including attached pilasters, buttresses, plinth and string courses fillets, kerbs and steps etc.	88.8000 sqm			675.0000	59940.00	INR Fifty Nine Thousand Nine Hundred & Forty Only
3	SIDE WALL						

  
**Chief Engineer**  
 Kerala Irrigation Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024

**For V J RAJU & Co.**  
  
**Managing Partner**



3.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	3.2000 cum			202.0000	646.40	INR Six Hundred & Forty Six and Paise Forty Only
3.02	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	2.8810 cum			6800.0000	19590.80	INR Nineteen Thousand Five Hundred & Ninety and Paise Eighty Only
3.03	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 ( 1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	7.2000 cum			7000.0000	50400.00	INR Fifty Thousand Four Hundred Only
3.04	4.3.2 : Centering and shuttering including strutting, propping etc. and removal of form work for:Retaining walls, return walls, (any thickness) including attached pilasters, buttresses, plinth and string courses fillets, kerbs and steps etc.	48.9000 sqm			675.0000	33007.50	INR Thirty Three Thousand &Seven and Paise Fifty Only
4	<b>HAND RAILS</b>						
4.01	10.26.3 : Providing and fixing hand rail of approved size by welding etc. to steel ladder railing, balcony railing, staircase railing and similar works, including applying priming coat of approved steel primer.G.I. pipes	62.0000 kg			185.0000	11470.00	INR Eleven Thousand Four Hundred & Seventy Only
4.02	2.31 : Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared	4000.0000 sqm			14.0000	56000.00	INR Fifty Six Thousand Only
4.03	9.7.7.1 : Providing and fixing panelling or panelling and glazing in panelled or panelled and glazed shutters for doors, windows and clerestory windows (Area of opening for panel inserts excluding portion inside grooves or rebates to be measured), Panelling for panelled or panelled and glazed shutters 25 mm to 40 mm thick:Float glass panes4 mm thick glass pane	5.7600 sqm			2100.0000	12096.00	INR Twelve Thousand &Ninety Six Only
5	<b>For OUTSIDE POLISHING</b>						
5.01	od52056/2021 - 2022 Labour for cleaning	35.0000 each			900.0000	31500.00	INR Thirty One Thousand Five Hundred Only

  
 Managing Partner  
 Thiruvananthapuram - 695024

For OUTSIDE POLISHING  
 od52056/2021 - 2022 Labour for cleaning  
  
 Managing Partner



5.02	od55105/2021_2022 : Sanding up of existing wooden surface and applying 3 coat of Imperia sealer and 3 coat of imperia P.U. matt on wooden panels.	1223.2560 sqm			1678.0000	2052623.57	INR Twenty Lakh Fifty Two Thousand Six Hundred & Twenty Three and Paise Fifty Seven Only
6	<b>MODULAR KITCHEN</b>						
6.01	od58940/2021_2022 : Supplying, providing and fixing stainless steel three sink unit of size 1.60m &times; 0.60m &times; 0.85m having bottom cross support and over head plate rack, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each			50000.0000	50000.00	INR Fifty Thousand Only
6.02	od58941/2021_2022 : Supplying ,providing and fixing stainless steel draining table of size 0.45m &times; 0.60m &times; 0.85m with one under shelf and bottom cross support, including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each			16800.0000	16800.00	INR Sixteen Thousand Eight Hundred Only
6.03	od58942/2021_2022 : Supplying ,providing and fixing stainless steel charcoal operated tandoor oven of size 0.60m &times; 0.60m &times; 0.90m including clay pot with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each			44500.0000	44500.00	INR Forty Four Thousand Five Hundred Only
6.04	od58943/2021_2022 : Supplying ,providing and fixing 20L wet grinder with stainless steel body including all its fixing including all its conveyance and placing at a suitable location instructed by the engineer in charge.  	1.0000 each			32000.0000	32000.00	INR Thirty Two Thousand Only
6.05	od58944/2021_2022 : Supplying,providing and fixing stainless steel single sink unit of size 0.60m &times; 0.60m &times; 0.85m with sunken top including bottom cross support and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each			21000.0000	21000.00	INR Twenty One Thousand Only
6.06	od58945/2021_2022 : Supplying, providing and fixing stainless steel bainmaire counter of size 1.80m &times; 0.65m &times; 0.85m with 6 nos of 1/2 gn pan, 1 under shelf, 2 over shelves and three sides covered, including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each			74000.0000	74000.00	INR Seventy Four Thousand Only

Chief Engineer

Kerala Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024


For V J RAJU & Co.

  
Managing Partner



6.07	od658947/2021_2022 : Supplying and providing stainless work table of size 0.45m &times; 0.60m &times; 0.85m with a bottom shelf at a distance of 0.45m from the table top, including all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each		16500.0000	16500.00	INR Sixteen Thousand Five Hundred Only
6.08	od64002/2021_2022 : Supplying and providing stainless steel work table of size 1.35m &times; 0.60m &times; 0.85m with 2 bottom shelves, including all its fittings, conveyance and placing at a suitable location instructed by the engineer in charge.	2.0000 each		13500.0000	27000.00	INR Twenty Seven Thousand Only
6.09	od64126/2021_2022 : Supplying, providing and installing stainless steel 2 door frost free vertical freezer of capacity 600L with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, &frac34; hp compressor, 220v, 1ph, 2 Doors, Temp. range -15 to -20 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each		111000.0000	111000.00	INR One Lakh Eleven Thousand Only
6.1	od64127/2021_2022 : Supplying ,providing and installing stainless steel 2 door vertical chiller of capacity 600Litres with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, &frac12; hp compressor, 220v, 1ph, 2 Doors, Temp. range +02 to +06 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each		113000.0000	113000.00	INR One Lakh Thirteen Thousand Only
6.11	od64319/2021_2022 : Supplying , providing and fixing stainless steel pot wash sink of size 1.00m &times; 0.60m &times; 0.30m having bottom cross support and over head plate rack, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each		41500.0000	41500.00	INR Forty One Thousand Five Hundred Only
6.12	od64397/2021_2022 : Supplying and providing stainless steel chute table of size 1.20m &times; 0.60m &times; 0.85m with 1 no. chute hole at the centre, bottom cross support and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each		24500.0000	24500.00	INR Twenty Four Thousand Five Hundred Only

**Chief Engineer**  
 Kerala Investigation & Infrastructure  
 Development Corporation Ltd.  
 Thiruvananthapuram - 695024

  
**Managing Partner**



6.13	od66351/2021_2022 : Supplying and fixing three phase 1440rpm, 1 Hp axial fan with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each	32000.0000	32000.00	INR Thirty Two Thousand Only
6.14	od66354/2021_2022 : Supplying ,providing and fixing stainless steel three burner unit of size 1.65m &times; 0.60m &times; 0.85m with 3 nos of hp burner, one under shelf, Needle Control Valve, Copper Pigtail, drainage trap, waste collecting tray, and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each	50000.0000	50000.00	INR Fifty Thousand Only
6.15	od66357/2021_2022 : Supplying and installing LPG pipe line with &frac12;TATA MS - C class pipe (3 + 3 man folding systems - total 6 cylinders), With DBC Click on adaptor, HP regulator, Connector, shut off valves, Unit Valves With frame connector, Pressure Gauge and Clamps. Including the Charge for pipe bending, Welding, painting, Pressure Testing and Labour charges guage, connecting pipes for burners etc. (charges including one year warranty ) including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 set	65000.0000	65000.00	INR Sixty Five Thousand Only
6.16	od69276/2021_2022 : Supplying ,providing and fixing GI Ducting for SS Hoods with 22 swg ,GI sheet including hanging rods, scaffolding charges and labour charges etc with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each	64500.0000	64500.00	INR Sixty Four Thousand Five Hundred Only
6.17	od69277/2021_2022 : Supplying , providing and fixing exhaust hood of size 1.80m &times; 0.90m &times; 0.45, using 22SWG 304 S Sheet and filters with 26 SWG 304 S S Sheet, with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	2.0000 each	54000.0000	108000.00	INR One Lakh Eight Thousand Only
6.18	od69278/2021_2022 : Supplying ,providing and fixing wall type hanging hood for hot plate/dosa plate of size 1.20m &times; 0.90m &times; 0.45m, using 22SWG 304 S S Sheet and filters with 26 SWG 304 S S Sheet, with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000 each	42000.0000	42000.00	INR Forty Two Thousand Only
7	<p style="text-align: right;">   <b>Engineer in Charge &amp; Co.</b>  <b>ELECTRICAL WORKS</b>  <b>Managing Partner</b> </p> <p style="text-align: right;"> <b>Chief Engineer</b>  Kerala Rehabilitation Infrastructure  Development Corporation Ltd.  Thiruvananthapuram - 695024 </p>				



7.01	1.12 : Wiring for light/ power plug with 2X4 sq. mm FRLS PVC insulated copper conductor single core cable in surface/ recessed medium class PVC conduit along with 1 No 4 sq. mm FRLS PVC insulated copper conductor single core cable for loop earthing as required.	20.0000	metre			225.0000	4500.00	INR Four Thousand Five Hundred Only
7.02	1.14.2 : Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface / recessed medium class PVC conduit as required 2X 2.5 sq. mm + 1 X 2.5 sq. mm earth wire	20.0000	metre			186.0000	3720.00	INR Three Thousand Seven Hundred & Twenty Only
7.03	1.31 : Supplying and fixing suitable size GI box with modular plate and cover in front on surface or in recess, including providing and fixing 3 pin 5/6 amps modular socket outlet and 5/6 amps modular switch, connection etc. as required. (For light plugs to be used in non residential buildings).	4.0000	each			450.0000	1800.00	INR One Thousand Eight Hundred Only
7.04	od69175/2021_2022 : SITC of Ceiling mounted, Chandelier hanging light, Elegant design with antique bronze finish. Superior glass diffuser to minimize glare, Recommended to use with energy saving lamps, 5 x 7.5 W A60 LED filament lamp, IP rating 20, Lamp base E27. (Havells ORNALITE CHANDELIER 1 X 5LS E27 BRZ or equivalent)	1.0000	each			19900.0000	19900.00	INR Nineteen Thousand Nine Hundred Only
7.05	od69274/2021_2022 : Supply, conveyance, installation, testing and commissioning of Ornamental ceiling fan of wooden finish with 1050 mm (or higher) sweep complete with 1500mm down rod, canopies, shackles and blades using standard accessories excluding resistance type regulator, wiring the down rod with 16/0.20mm PVC insulated and PVC sheathed 650/1100V grade 3 core round conductor flex wire or with extended original wiring etc &ndash; Make- Usha /equivalent	1.0000	each			12600.0000	12600.00	INR Twelve Thousand Six Hundred Only

*Sreeraj*

Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024

For V J RAJU & Co.

*V J Raju*  
Managing Partner



7.06	od68879/2021_2022 : Supply, Installation, testing and commissioning of 30KVA, silent type, water cooled, radiator type, electric start DG set with acoustic enclosure and standard control panel. The engine shall be capable of taking 10% overload for one hour after 2 hours of operation, with AMF panel. Alternator- brushless, self excited, self regulated, class H insulation, suitable for continuous operation at 1500rpm generating 415V +/-5V at 0.8pf, 50Hz 0.85 load factor 3phase, 4 wire system. &lt;br&gt;Baseframe- formed sheet channel, sturdy welded construction for mounting engine, Alternator and Acoustic enclosure	1.0000 each	585000.0000	585000.00	INR Five Lakh Eighty Five Thousand Only
7.07	od69168/2021_2022 : SITC of Solar LED lighting System with following accessories. (a) All in one Solar LED CSADHMP40 CDL, 40W LED Crompton make / Equivalent having 60W solar module Wp with 27 Ah battery having 6800lumens having dimensions (Approx) 955 X 630 X 55 (LWH) having approximate weight of 19Kg suitable to fit on tubular pole. (b) Pole : 3.5/4 Mtr. long (clear height -210kg) armless pole of cast iron with bottom dia.200mm with base plate and top dia. 100mm, foundation bolt etc. complete fixed on existing cement concrete foundation etc. as per the directions of engineer at site as required including 3 year AMC complete.	5.0000 each	95000.0000	475000.00	INR Four Lakh Seventy Five Thousand Only
8	<b>GENERATOR ROOM</b>				
8.01	2.3.1 : Banking excavated earth in layers not exceeding 20 cm in depth, breaking clods, watering, rolling each layer with 1/2 tonne roller, or wooden or steel rammers, and rolling every 3rd and top-most layer with power roller of minimum 8 tonnes and dressing up, in embankments for roads, flood banks, marginal banks, and guide banks etc., lead up to 50 m and lift up to 1.5 m :All kinds of soil	6.0000 cum	521.0000	3126.00	INR Three Thousand One Hundred & Twenty Six Only
8.02	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	2.0000 cum	201.0000	402.00	INR Four Hundred & Two Only

**For V**

*[Signature]*  
Managing Partner

Chief Engineer

Kerala Irrigation Infrastructure Development Corporation Ltd.  
Thiruvananthapuram - 695024



8.03	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	0.5000 cum			6402.0000	3201.00	INR Three Thousand Two Hundred & One Only
8.04	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	2.2500 cum			8000.0000	18000.00	INR Eighteen Thousand Only
8.05	4.3.1 : Centering and shuttering including strutting, propping etc. and removal of form work for:Foundations, footings, bases for columns	1.3500 sqm			325.0000	438.75	INR Four Hundred & Thirty Eight and Paise Seventy Five Only
8.06	10.16.1 : Steel work in built up tubular (round, square or rectangular hollow tubes etc.), including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete.Hot finished welded type tubes	125.0000 kg			160.0000	20000.00	INR Twenty Thousand Only
8.07	13.52.1 : Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete.On steel work	2.5000 sqm			210.0000	525.00	INR Five Hundred & Twenty Five Only
8.08	12.48 : Providing & fixing on roof pressed clay tile (Mangalore tile) of 20 mm nominal thickness and of approved size and as per approved pattern on steel frame work complete (steel frame work to be paid separately)	4.9640 sqm			370.0000	1836.68	INR One Thousand Eight Hundred & Thirty Six and Paise Sixty Eight Only
8.09	12.49 : Providing & laying on roof pressed clay tile ridge (Mangalore tile) of 20 mm thickness and of approved pattern on steel frame work complete (steel frame work to be paid separately).	6.0000 metre			80.0000	480.00	INR Four Hundred & Eighty Only
8.1	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth levelThermo - Mechanically Treated bars of grade Fe-500D or more	93.4200 kilogram			93.0000	8688.06	INR Eight Thousand Six Hundred & Eighty Eight and Paise Six Only
9	<b>CIVIL WORK FOR LAMP POST</b>						
9.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm in plan area) including disposal of excavated earth, load up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	1.0800 cum			202.0000	218.16	INR Two Hundred & Eighteen and Paise Sixteen Only

For V  
Managing Partner

Chief Engineer  
Kerala Irrigation Department  
Thiruvananthapuram - 695024

Managing Partner

Development Corporation Ltd.  
Thiruvananthapuram - 695024



9.02	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	1.0800 cum	8000.0000	8640.00	INR Eight Thousand Six Hundred & Forty Only
9.03	4.3.1 : Centering and shuttering including strutting, propping etc. and removal of form work for: Foundations, footings, bases for columns	9.0000 sqm	320.0000	2880.00	INR Two Thousand Eight Hundred & Eighty Only
9.04	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth levelThermo - Mechanically Treated bars of grade Fe-500D or more	10.8000 kilogram	93.0000	1004.40	INR One Thousand & Four and Paise Forty Only
<b>Total in Figures</b>				7196599.18	INR Seventy One Lakh Ninety Six Thousand
<b>Quoted Rate in Words</b>		<b>INR Seventy One Lakh Ninety Six Thousand Five Hundred and Paise Eighteen Only</b>			

**For V J RAJU & Co.**

  
Managing Partner



Chief Engineer  
Kerala Irrigation Infrastructure  
Development Corporation Ltd.  
Thiruvananthapuram - 695024