

केरल KERALA

516305

AGREEMENT NO..259../ KIIDC/2021-22 DATED 24.06.2021

CONTRACT AGREEMENT entered into on this 24th day of June Two Thousand Twenty One between Sri Haridas P.S GRIDS, Digital Surveyors and Engineering Consultants MIG 56, SURABHINAGAR KAKKANAD ERNAKULAM - 682030 . for and on behalf of the Company (hereinafter called the Company) on the other part for the work, KIIFB KIIDC Improvements to Anthakarathodu In Tripunithura Municipality Landscaping and Arboriculture, Construction of Kiosk And Toilet And Operation and Maintenance for One Year by the former as per accompanying agreement, accepted tender with conditions of contract, plans, accepted schedule with specifications approved by Chief Engineer, M/s Kerala Irrigation Infrastructure Development Corporation Ltd., PARVATHY, T.C. 84/3 (Old 36/1), NH66 Service Road, Enjakkal Jn, Chakai P.O., Thiruvananthapuram – 695 024., which form part of this agreement.

**HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56 SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
MOB: 9495336398**

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024


No. 5070 Rs. 5000/- 22/6/21

Haridas P.S. MIG 56 Surabhinagar

V.R. Beena, Stamp Vendor, Perumbavoor

Kakkanael



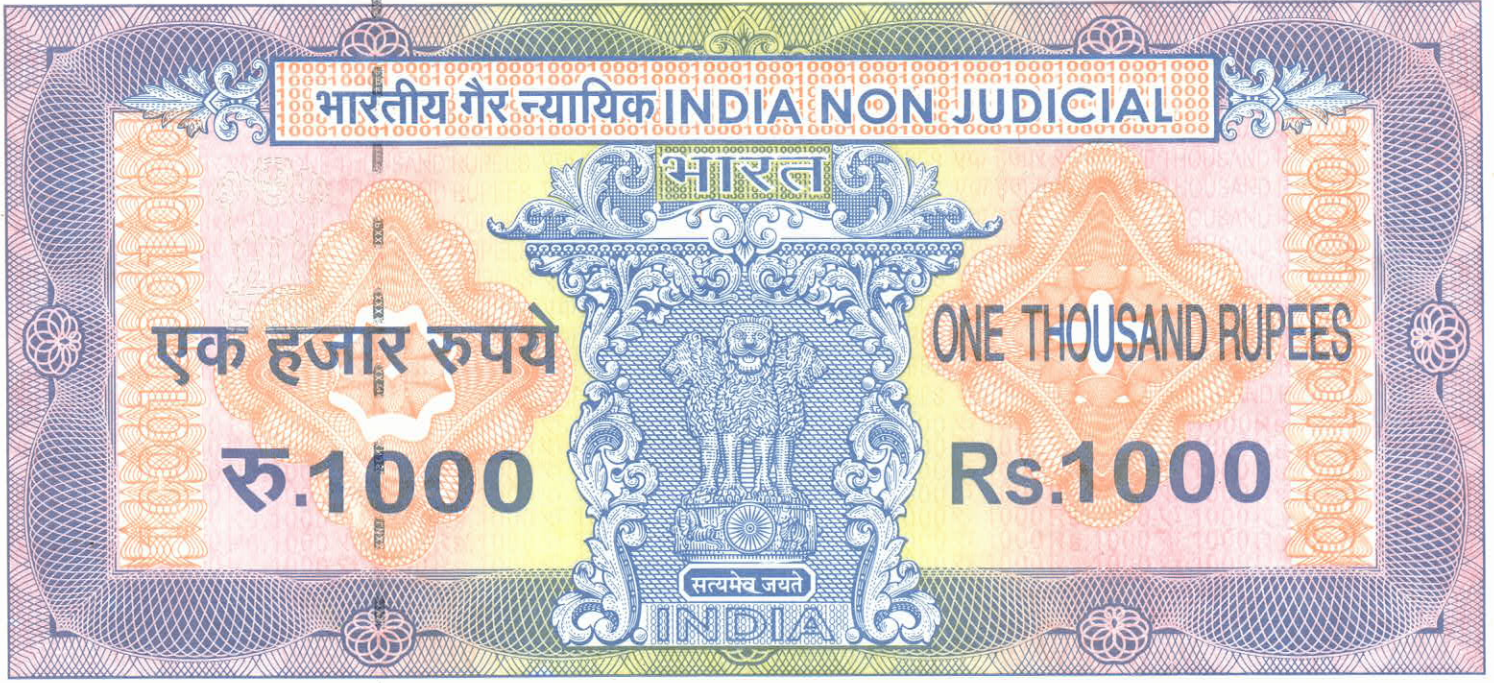

കേരളം കേരल KERALA

W 140748

Signed and delivered by the above mentioned **Sri Haridas P.S GRIDS ,
Digital Surveyors and Engineering Consultants MIG 56, SURABHINAGAR
KAKKANAD ERNAKULAM – 682030.**

In the presence of:-

1.

2.

Beena

Chief Engineer
Kerala Irrigation and
Development Corporation
Thiruvananthapuram

Contractor


Haridas P.S.

**HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398**



No. 5071 Rs. 1000/- 22/6/21

Haridas P.S. MIG 56 Surabhinagar
V.R. Beena, Stamo Vendor, Perumbavoor
Kakkanad

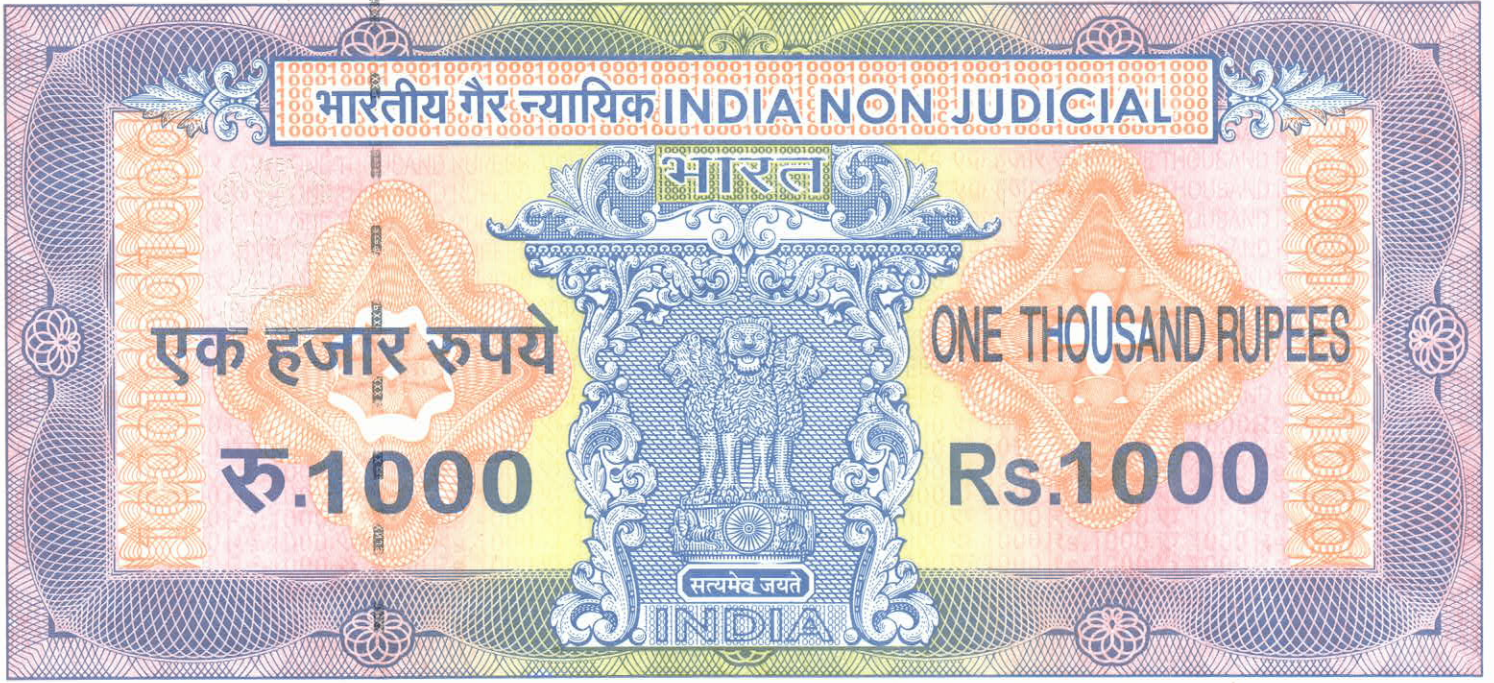

കേരളം केरल KERALA

W 140749

Signed and delivered by Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Limited, PARVATHY, T.C. 84/3 (Old 36/1), NH66 Service Road, Enjakkal Jn, Chakai P O, Thiruvananthapuram – 695024, for and on behalf of the Company.

Parvathy

Chief Engineer,
Kerala Irrigation Infrastructure Development Corporation Limited
(for and on behalf of the Company)

In the presence of:-

Chief Engineer
Kerala Irrigation Infrastructure Development Corporation Ltd.
Thiruvananthapuram - 695024

1.

2.

Haridas P.S.


HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398

No. 5072 Rs. 1000/- 22/6/21

Haridas P.S. MIG 56 Surabhinagar
Kakkanad

V.R. Beena, Stamp Vendor, Perumbavoor



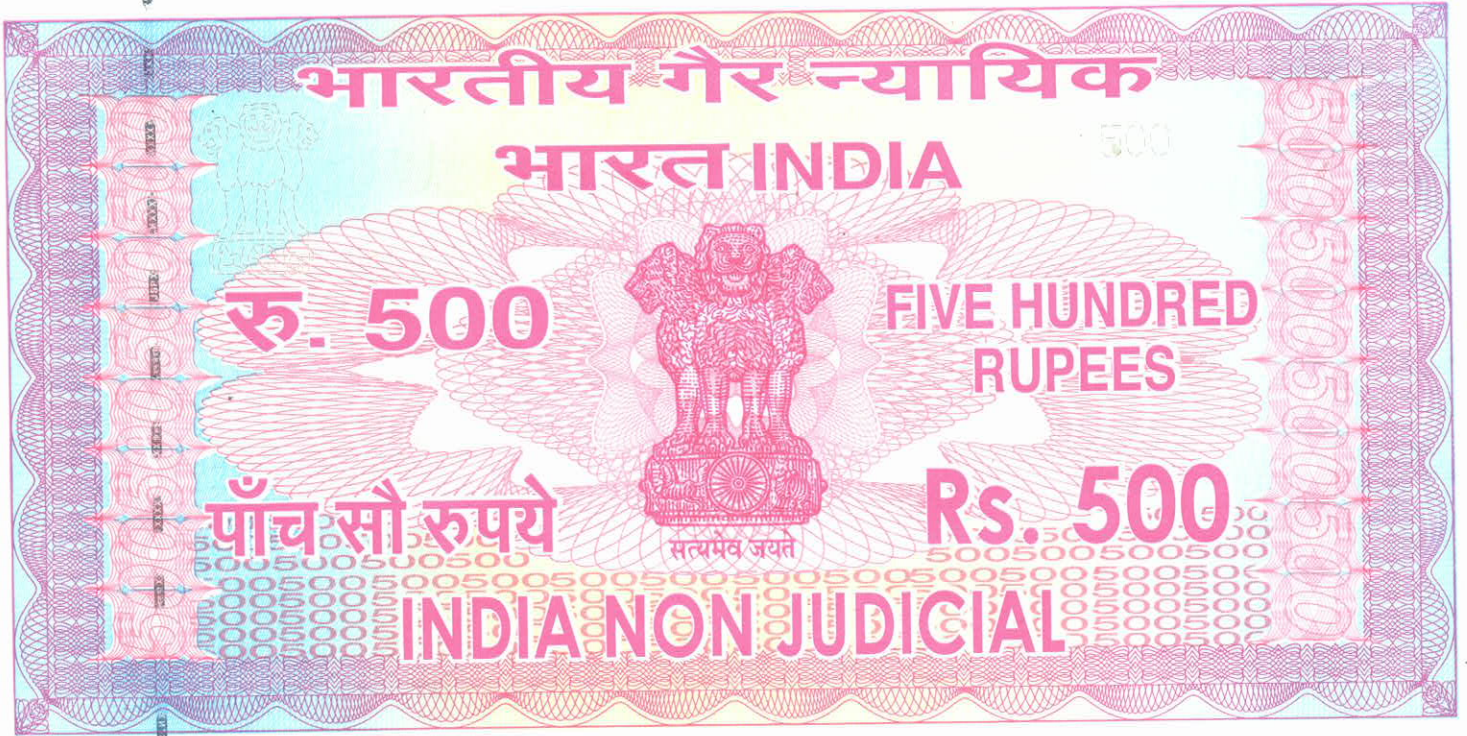

കേരളം केरल KERALA

K 47777

MEMORANDUM OF WORK TENDERED

Name of work	KIIFB KIIDC Improvements To Anthakarathodu In Tripunithura Municipality Landscaping and Arboriculture ,Construction Of Kiosk And Toilet And Operation and Maintenance For One Year
Estimate P.A.C	Rs. 80,08,181/-
Contract P.A.C	Rs. 76,62,223.78/-
Date of starting	The work should be started within 10 days after executing agreement
Date of completion	3 months from the date of handing over the site <i>g...</i>
Performance Guarantee	Treasury FD for an amount of Rs. 2,29,9000/- JL 0765338 dated 22.06.2021 for 2 years.


[Signature]
Contractor

[Signature]
Chief Engineer
Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

**HARIDAS P.S.
GRIDS**
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG-56 SURABHINAGAR
KAKKANAD ERNAKULAM - 682 030
Mob: 9495336398



No. 5073 Rs. 500/- 22/6/21
Haridas P.S. Mig 56 Surabhinagar
V.R. Beena, Stamp Vendor, Perumbavoor
Kakkanad

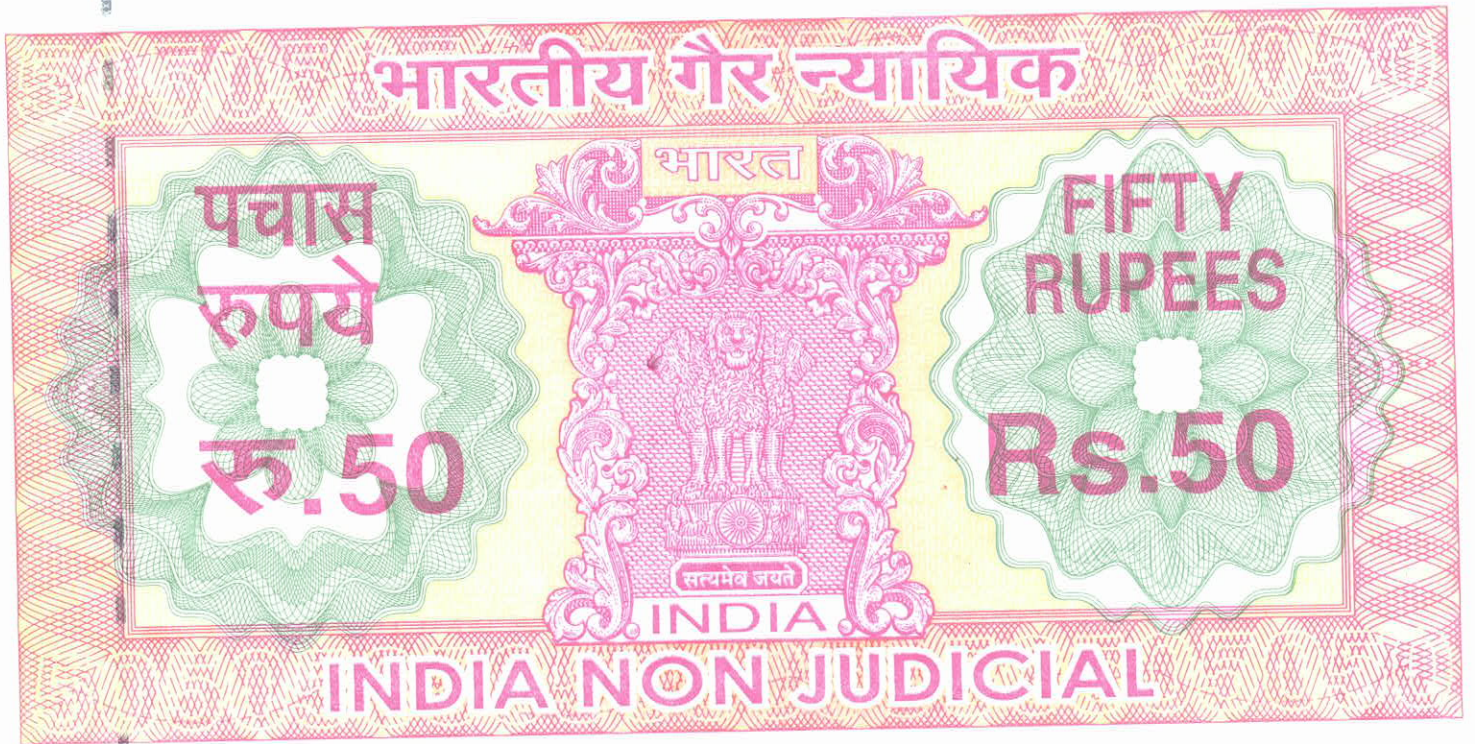

കേരളം केरल KERALA

CB 169698

[Handwritten signature]


[Handwritten signature]

**HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KARONAD, ERNAKULAM - 682 030
Mob : 9495336398**

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024



No. 5074 Rs. 50/- 22/6/21
Haridas P.S MIG 56 Surabhinagar
V.R. Beena, Stamp Vendor, Perumbavoor / Karthikeyan

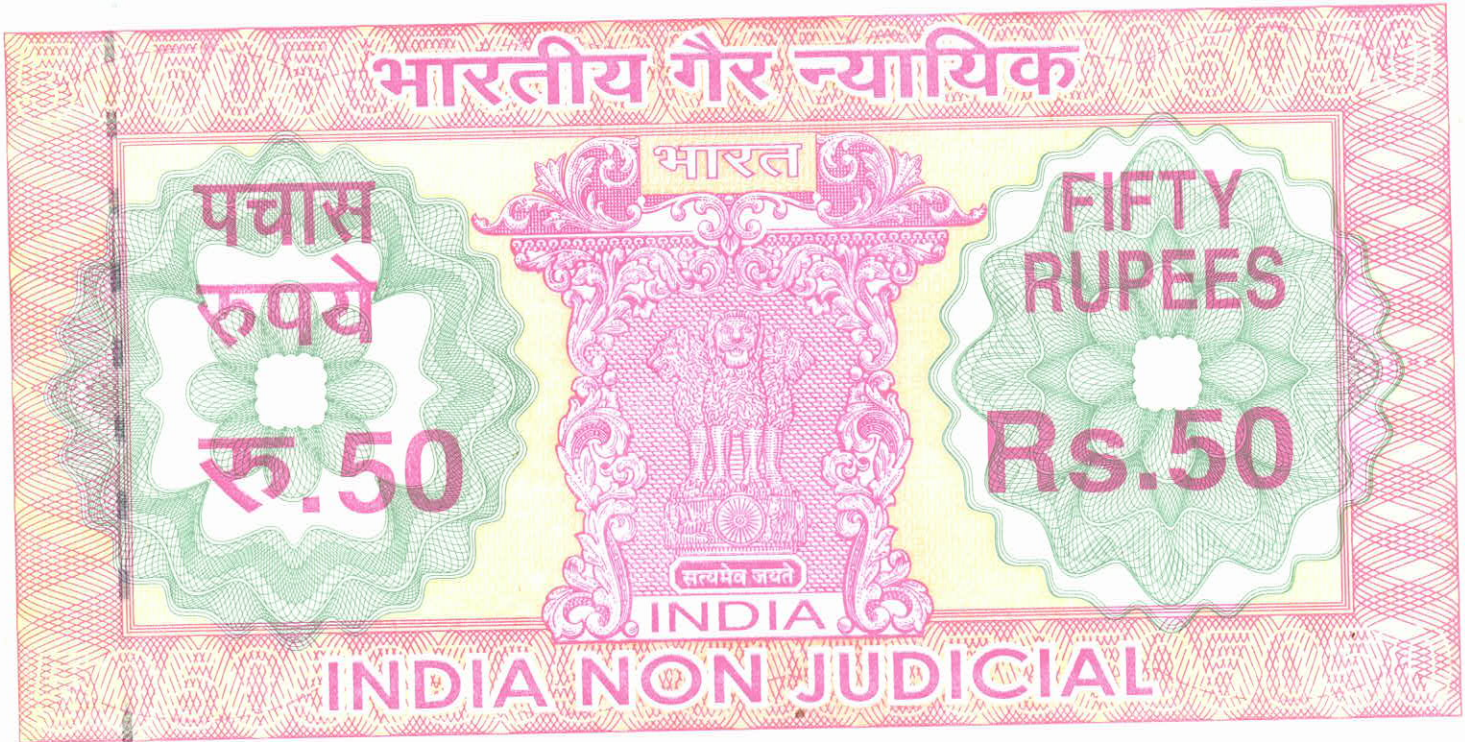

കേരളം केरल KERALA

CB 169699

[Handwritten signature]

HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob: 9495336398




[Handwritten signature]
Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

No. 5075 Rs. 50/- 22/6/21

Haridas P.S MIG 56 Surabhinagar
Kakkanad
V.R. Beena, Stamp Vendor, Perumbavoor

[Handwritten signature]

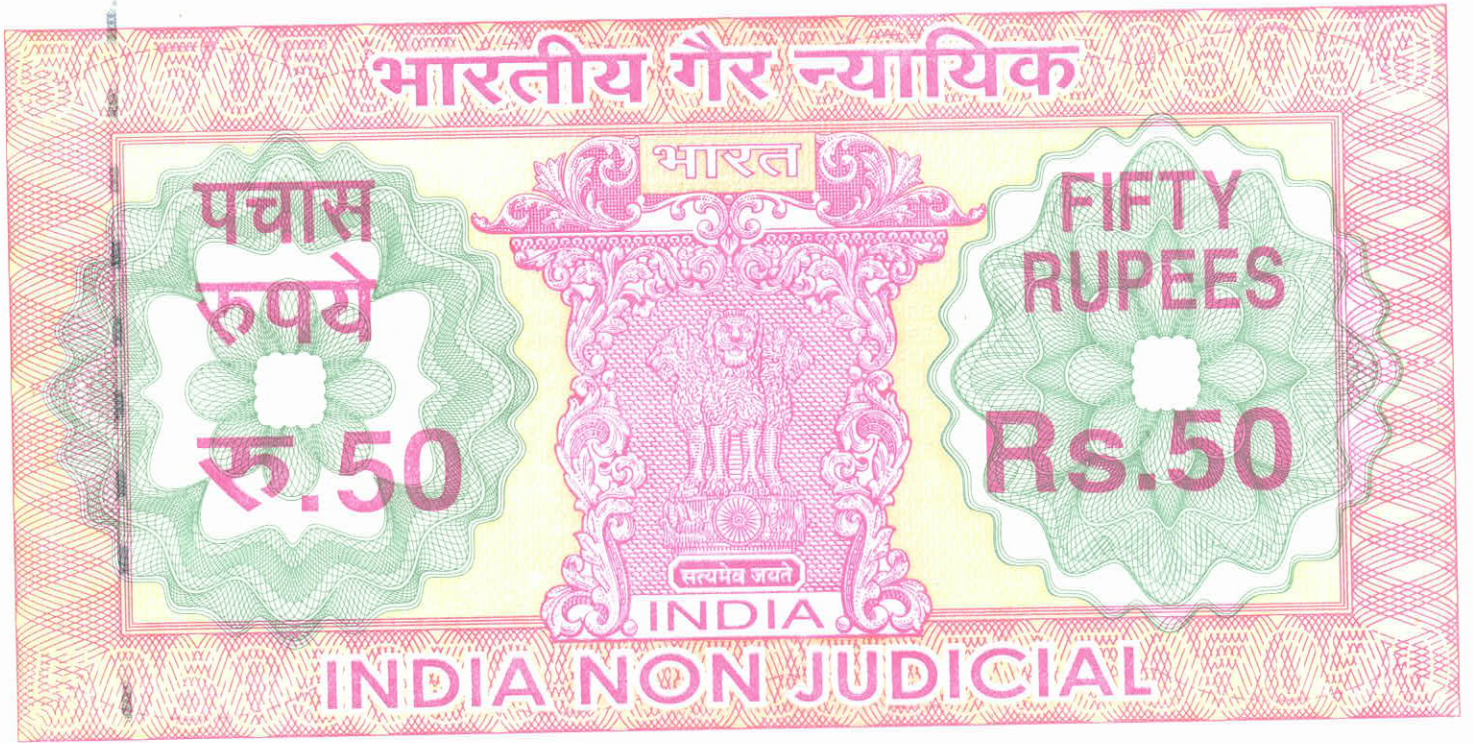

കേരളം केरल KERALA

CB 169700



[Handwritten signature]

HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398


[Handwritten signature]
Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024



No. 5076 Rs. 50/- 22/6/21

Haridas P.S. MIG 56 Surabhinagar
Kakkanad
V.R. Beena, Stamp Vendor, Perumbavoor

[Handwritten signature]

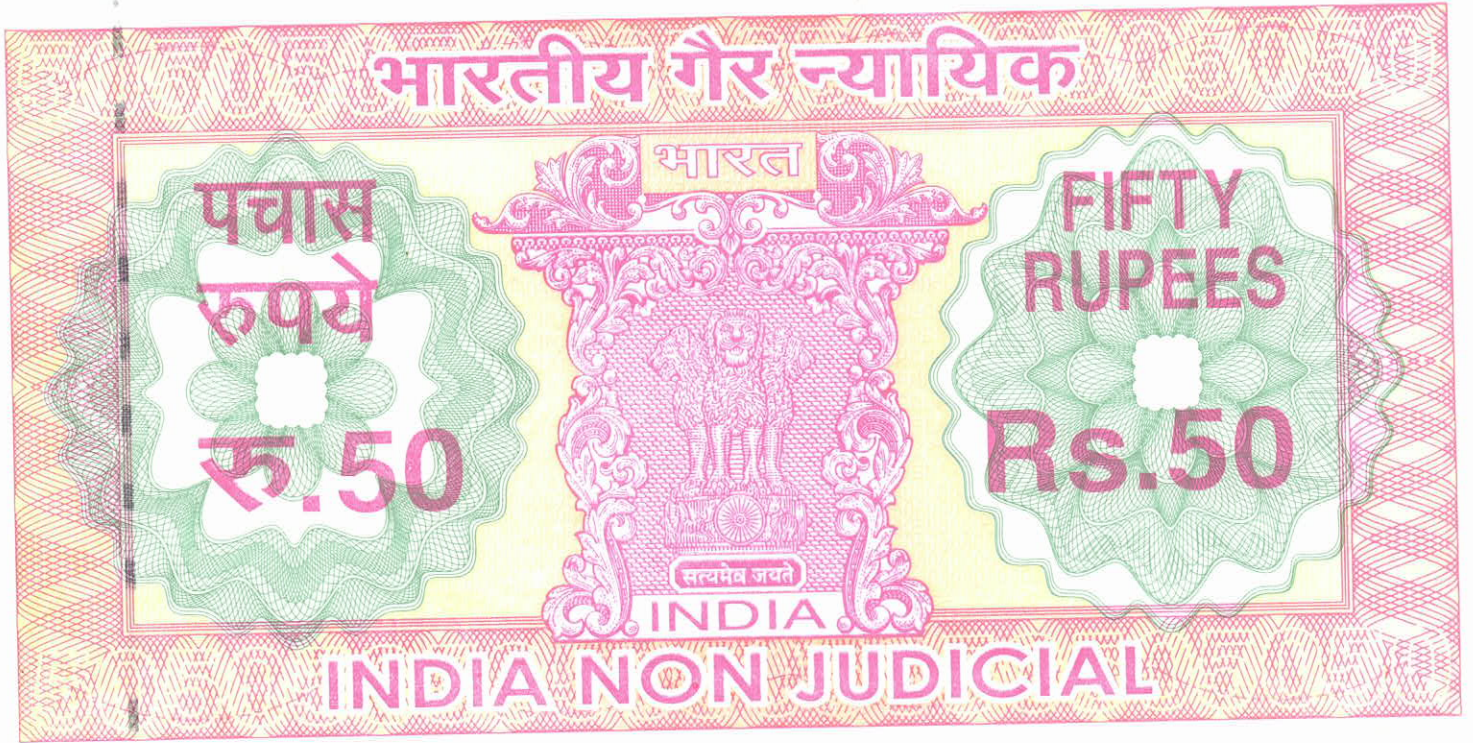

കേരളം കേരल KERALA

CB 169701

Handwritten signature
HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398

Handwritten signature
Chief Engineer
Kerala State Road Development Corporation Ltd.
Thiruvananthapuram - 695024



No. 5077 Rs. 50/- 22/6/21
Haridas P.S MIG 56 Surabhinagar
V.R. Beena, Stamp Vendor, Perumbavoor *Handwritten signature* Kakkannad

Validate

Print

Help

Item Rate BoQ

Tender Inviting Authority: KERALA IRRIGATION INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

Work Name : IMPROVEMENTS TO ANTHAKARA THODU IN TRIPUNITHURA MUNICIPALITY- LANDSCAPING & ARBORICULTURE ,CONSTRUCTION OF KIOSK AND TOILET AND OPERATION & MAINTENANCE FOR ONE YEAR

Contract No: KIIDC/Tender/365/2020-21

Bidder Name : HARIDAS P S

PRICE SCHEDULE

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

NUMBER	TEXT #	NUMBER #	TEXT #	NUMBER	NUMBER #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	Estimated Rate	BASIC RATE In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT Without Taxes	TOTAL AMOUNT In Words	TEXT #		
1	2	4	5	6	13	53	55			
1	Appendix A: Landscaping & Tress									
1.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	262.9900	cum		234.0000	61539.66	INR Sixty One Thousand Five Hundred & Thirty Nine and Paise Sixty Six Only			
1.02	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	47.6370	cum		6395.0000	304638.62	INR Three Lakh Four Thousand Six Hundred & Thirty Eight and Paise Sixty One Only			
1.03	4.1.5 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size)	29.2270	cum		6300.0000	184130.10	INR One Lakh Eighty Four Thousand One Hundred & Thirty and Paise Ten Only			
1.04	4.1.3 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:2:4 (cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	1.9440	cum		7280.0000	14152.32	INR Fourteen Thousand One Hundred & Fifty Two and Paise Thirty Two Only			

HARIDAS P S

DIGITAL ENGINEERS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398



Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.

1.05	4.3.2 : Centering and shuttering including strutting, propping etc. and removal of form work for: Retaining walls, return walls, (any thickness) including attached pilasters, buttresses, plinth and string courses fillets, kerbs and steps etc.	17.2800 sqm	400.0000	6912.00	INR Six Thousand Nine Hundred & Twelve Only
1.06	7.1.1 : Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) up to plinth level with: Cement mortar 1:6 (1 cement : 6 coarse sand)	147.1910 cum	5500.0000	809550.50	INR Eight Lakh Nine Thousand Five Hundred & Fifty and Paise Fifty Only
1.07	od238734/2020_2021 : Supplying, fitting, fixing and handing over the garden benches (Victoria Bench - Product Code) or equivalent as specified in the drawings of make ARIHANT or equivalent acceptable to engineer - in - chief, with prior approval, fully complete at site with all accessories, labours, power supply etc.	45.0000 each	17250.0000	776250.00	INR Seven Lakh Seventy Six Thousand Two Hundred & Fifty Only
1.08	50.6.1.1 : Solid block masonry using pre cast solid blocks (factory made) of size 40x20x20cm or nearest available size conforming to IS 2185 part 1 of 1979 for foundation and plinth with thickness 20 cm and above in: CM 1:6 (1 cement : 6 coarse sand) etc complete	184.0820 cum	5025.0000	925012.05	INR Nine Lakh Twenty Five Thousand & Twelve and Paise Five Only
1.09	50.6.1.7 : Solid block masonry using pre cast solid blocks (Factory made) of size 40x20x15cm or nearest available size conforming to IS 2185 part I of 1979 for foundation and plinth with thickness 15 cm in : CM 1:6 (1 cement : 6 coarse sand) etc complete	37.5750 cum	5100.0000	191632.50	INR One Lakh Ninety One Thousand Six Hundred & Thirty Two and Paise Fifty Only
1.1	13.1.1 : 12 mm cement plaster of mix: 1:4 (1 cement : 4 fine sand)	1334.2580 sqm	240.0000	320221.92	INR Three Lakh Twenty Thousand Two Hundred & Twenty One and Paise Ninety Two Only
1.11	13.48.1 : Finishing with Deluxe Multi surface paint system for interiors and exteriors using primer as per manufacturers specifications: Two or more coats applied on walls @ 1.25 ltr/10 sqm over and including one coat of special primer applied @ 0.75 ltr /10 sqm	848.7080 sqm	130.0000	110332.04	INR One Lakh Ten Thousand Three Hundred & Thirty Two and Paise Four Only
1.12	2.25 : Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20 cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift up to 1.5 m.	152.4470 cum	170.0000	25915.99	INR Twenty Five Thousand Nine Hundred & Fifteen and Paise Ninety Nine Only

Account

Haridas P.S.

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398

1.13	8.12 : Providing and laying flamed finish Granite stone flooring in required design and patterns, in linear as well as curvilinear portions of the building all complete as per the architectural drawings with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement : 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing, curing and polishing etc. all complete as specified and as directed by the Engineer-in-charge. a. Flamed finish granite stone slab Jet Black, Cherry Red, Elite Brown, Cat Eye or equivalent.	152.3750 sqm			3750.0000	571406.25	INR Five Lakh Seventy One Thousand Four Hundred & Six and Paise Twenty Five Only
1.14	10.16.1 : Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Hot finished welded type tubes	8202.3370 kg			117.0000	959673.43	INR Nine Lakh Fifty Nine Thousand Six Hundred & Seventy Three and Paise Forty Three Only
1.15	13.52.1 : Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete. On steel work	172.3200 sqm			160.0000	27571.20	INR Twenty Seven Thousand Five Hundred & Seventy One and Paise Twenty Only
1.16	od242751/2020_2021 : Supplying and planting of Hedge Plants approved by Engineer-in-charge at required spacing as shown in drawing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, replacement of dead trees and for providing a pit sizes 50x50x70 cm , staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (15)neem (1.2 m to 1.5m height)	35.0000 each			430.0000	15050.00	INR Fifteen Thousand & Fifty Only
1.17	od242752/2020_2021 : Supplying and planting of trees approved by Engineer-in-charge at required spacing as shown in drawing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, replacement of dead trees and for providing a pit sizes 50x50x70 cm taking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (12)cassia fistula (1.2 m to 1.5 m height)	45.0000 each			340.0000	15300.00	INR Fifteen Thousand Three Hundred Only



HARIDAS P.S.

GRIDS

DIGITAL SURVEYORS &

ENGINEERING CONSULTANTS

MIG 56, SURABHINAGAR

KAKKANAD, ERNAKULAM - 682 030

Mob : 9495336398



Chief Engineer

Kerala Irrigation Infrastructure

Development Corporation Ltd.

Thiruvananthapuram - 695024

1.18	od242753/2020_2021 : Supplying and planting of trees approved by Engineer-in-charge to a specified locations as shown in drawing. Rate shall include Cost of plants, soil work inclusive of red soil, sand and manure mix staking and planting of trees sapling, replacement of dead trees and for providing a pit size 50 x 50x 70 cm and maintenance till the completion of project work.(4)Red Palms (1.2 m to 1.5m Height.)	20.0000 each	801.0000	16020.00	INR Sixteen Thousand & Twenty Only
1.19	od242755/2020_2021 : Supplying and planting of trees approved by Engineer-in-charge to a specified locations as shown in drawing. Rate shall include Cost of plants, soil work inclusive of red soil, sand and manure mix staking and planting of trees sapling, replacement of dead trees and for providing a pit size 50 x 50 x 70 cm and maintenance till the completion of project work.(1).Plumeria Alba white(2.0m to 2.5m)	20.0000 each	2750.0000	55000.00	INR Fifty Five Thousand Only
1.2	od245318/2020_2021 : Supplying and planting of trees approved by Engineer-in-charge to a specified locations as shown in drawing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, replacement of dead trees and for providing a pit sizes 50x50x70 cm and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (9)Oleander tall pink(1.2 m to 1.5 m height)	25.0000 each	350.0000	8750.00	INR Eight Thousand Seven Hundred & Fifty Only
1.21	od245319/2020_2021 : Supplying and planting of trees approved by Engineer-in-charge to a specified locations as shown in drawing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, replacement of dead trees and for providing a pit sizes 50x50x70 cm, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (17)Indian blackberry or Jamun (1.2 m to 1.5 m height)	40.0000 each	430.0000	17200.00	INR Seventeen Thousand Two Hundred Only
1.22	od244526/2020_2021 : Supplying and planting of shrubs approved by Engineer-in at specified location. Rate shall include cost of plants soil work,manure and fertilizers used in top dressing, chemical and mechanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (13)Iabernaemontana green	340.0000 each	180.0000	61200.00	INR Sixty One Thousand Two Hundred Only

HARIDAS P.S.
GRIDS

DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KANKARAY PUDU...

Shivanee
Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.

1.23	od245315/2020_2021 : Supplying and planting of shrubs approved by Engineer-in at specified ground cover at required spacing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, staking and maintaining the planting till it is handed over from the date of planting from the date of planting operating etc.(1)Rhoeo	310.0000 each	155.0000	48050.00	INR Forty Eight Thousand & Fifty Only
1.24	od245317/2020_2021 : Supplying and planting of shrubs approved by Engineer-in at specified ground cover at required spacing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, staking and maintaining the planting till it is handed over from the date of planting from the date of planting operating etc.(2)Lily (Orange or white)	310.0000 each	150.0000	46500.00	INR Forty Six Thousand Five Hundred Only
1.25	od244529/2020_2021 : Supplying and planting of shrubs approved by Engineer-in at specified ground cover at required spacing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. (1)Aglonema	310.0000 each	160.0000	49600.00	INR Forty Nine Thousand Six Hundred Only
1.26	od258564/2020_2021 : Supplying and planting of creepers approved by Engineer-in at specified ground cover at required spacing. Rate shall include cost of plants soil work, manure and fertilizers used in top dressing, chemical and mechanical pest control, staking and maintaining the planting till it is handed over from the date of planting labour charges, pest control operating etc. Tubergia/Alameda/ Jasmin/Butterfly Pea	32.0000 each	162.0000	5184.00	INR Five Thousand One Hundred & Eighty Four Only
1.27	od246946/2020_2021 : supplying and laying the paspullam over the leveled and prepared surface.the rate shall include the cost of grass mat input manure and fertilizers used periodically for top dressing ,chemical and mechanical pest control and all post planting maintenance procedure complete till the completion of project 1)Buffallo grass	585.0000 sqm	140.0000	81900.00	INR Eighty One Thousand Nine Hundred Only

Signature

Signature
HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

1.28	od249385/2020_2021 : Supplying SS Dustbins(3 Bins in each set) Double Cylinder (Duo) made of 18 gauge, SS-202 grade stainless steel hairline finish of size width 400 mm external dia., length 750 mm and height 750 mm with 2 nos. 300 mm diameter round openings at top with PU coating and Neoprene gasket ring at bottom. The dustbin should have removable cover and provision for clipping poly bags complete as per design and directions of Engineer in-charge. The dustbin shall display sticker indicating type of garbage and the top shall be finished with approved shade of PU coating as per the instructions of Engineer-in-charge inclusive of testing charges if any and transportation to site	40.0000	each			11000.0000	440000.00	INR Four Lakh Forty Thousand Only
1.29	od265529/2020_2021 : Engaging labour for maintaining ,cleaning and watering trees/plants/shrubs/lawn in walkway for a period of 1 years after the completion of beautification work.	365.0000	each			580.0000	211700.00	INR Two Lakh Eleven Thousand Seven Hundred Only
1.3	od273706/2020_2021 : Engaging Gardener for trees/plants/shrubs/lawn in walkway for a period of 1 years after the completion of beautification work.	24.0000	each			750.0000	18000.00	INR Eighteen Thousand Only
1.31	50.18.9.4.1 : Providing and fixing PVC pipes includings jointing of pipes with one step PVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer in Charge.32 mm dia 10.Kgf/cm2	2100.0000	metre			175.0000	367500.00	INR Three Lakh Sixty Seven Thousand Five Hundred Only
1.32	18.54.2 : Providing and fixing PTMT bib cock of approved quality and colour,15 mm nominal bore, 122 mm long, weighing not less than 99 gms	20.0000	each			190.0000	3800.00	INR Three Thousand Eight Hundred Only
2	Appendix B: kiosk and toilet							
2.01	10.16.1 : Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete.Hot finished welded type tubes	1560.6880	kg			115.0000	179479.12	INR One Lakh Seventy Nine Thousand Four Hundred & Seventy Nine and Paise Twelve Only
2.02	10.25.1 : Item Shifted to head 14 as item 14.74Steel work welded in built up sections/framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer using structural steel etc. as required.In stringers, treads,landings etc. of stair cases, including use of chequered plate wherever required, all complete	1351.5600	kg			90.0000	121640.40	INR One Lakh Twenty One Thousand Six Hundred & Forty and Paise Forty Only


HARIDAS P.S.
GRIDS

DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398



Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

2.03	10.6.3 : Supplying and fixing rolling shutters of approved make, made of required size M.S. laths, interlocked together through their entire length and jointed together at the end by end locks, mounted on specially designed pipe shaft with brackets, side guides and arrangements for inside and outside locking with push and pull operation complete, including the cost of providing and fixing necessary 27.5 cm long wire springs manufactured from high tensile steel wire of adequate strength conforming to IS: 4454 - part 1 and M.S. top cover of required thickness for rolling shutters.80x0.90 mm M.S. laths with 0.90 mm thick to cover	16.6400	sqm	16.6400	39104.00	INR Thirty Nine Thousand One Hundred & Four Only
2.04	10.7 : Providing and fixing ball bearing for rolling shutters.	16.0000	no	16.0000	8000.00	INR Eight Thousand Only
2.05	9.57.3 : Providing and fixing ISI marked oxidised M.S. pressed butt hinges with necessary screws etc. complete.75x47x1.70 mm	12.0000	no	30.0000	360.00	INR Three Hundred & Sixty Only
2.06	50.9.15.1 : Supplying and fixing 200 mm Aluminium aldrop	8.0000	no	170.0000	1360.00	INR One Thousand Three Hundred & Sixty Only
2.07	9.63.4 : Providing and fixing ISI marked oxidised M.S. tower bolt black finish, (Barrel type) with necessary screws etc. complete.100x10 mm	16.0000	no	38.0000	608.00	INR Six Hundred & Eight Only
2.08	9.66.1 : Providing and fixing ISI marked oxidised M.S. handles conforming to IS : 4992 with necessary screws etc. complete.125 mm	4.0000	no	35.0000	140.00	INR One Hundred & Forty Only
2.09	12.48 : Providing & fixing on roof pressed clay tile (Mangalore tile) of 20 mm nominal thickness and of approved size and as per approved pattern on steel frame work complete (steel frame work to be paid separately)	25.6010	sqm	325.0000	8320.33	INR Eight Thousand Three Hundred & Twenty and Paise Thirty Two Only
2.1	12.49 : Providing & laying on roof pressed clay tile ridge (Mangalore tile) of 20 mm thickness and of approved pattern on steel frame work complete (steel frame work to be paid separately).	24.4800	metre	70.0000	1713.60	INR One Thousand Seven Hundred & Thirteen and Paise Sixty Only
2.11	13.52.1 : Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete. On steel work	1464.8860	sqm	160.0000	234381.76	INR Two Lakh Thirty Four Thousand Three Hundred & Eighty One and Paise Seventy Six Only
2.12	04251884/2020_2021 : Supplying and installing Portlet Toilet Western Type (EWC) Lower end cabin (L 1000mm X W1000mm X H 2100mm) including door, Ventilator, Sanitation & plumbing inclusive of testing charges if any and transportation to site P as per the instructions of Engineer-in charge	4.0000	each	41000.0000	164000.00	INR One Lakh Sixty Four Thousand Only

HARIDAS P.S.

GRIDS

DIGITAL SURVEYORS & ENGINEERING CONSULTANTS

MIG 56, SURABHINAGAR

KAKKANAD, ERNAKULAM - 682 030

Mob : 9495336398

Haridas P.S.
Haridas P.S. Engineer

Kerala Irrigation Infrastructure

Development Corporation Ltd.

Thiruvananthapuram - 695024

2.13	od251885/2020_2021 : Supplying and installing Bio Digester Tank with 900LTR capacity over cement concrete bed 1:3:6 (1 cement : 3 fine aggregates : 6 broken stone 40 mm size) which will be paid separately.	2.0000 each	39850.0000	79700.00	INR Seventy Nine Thousand Seven Hundred Only
2.14	od258697/2020_2021 : Supplying and installing soak pit for bio digester tank	2.0000 each	3500.0000	7000.00	INR Seven Thousand Only
2.15	18.48 : Providing and placing on terrace (at all floor levels) polyethylene water storage tank :ISI 12701 marked, with cover and suitable locking arrangement and making necessary holes for inlet, outlet and overflow pipes but without fittings and the base support for tank.	1000.0000 Litre	9.5000	9500.00	INR Nine Thousand Five Hundred Only
2.16	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	7.2000 cum	170.0000	1224.00	INR One Thousand Two Hundred & Twenty Four Only
2.17	50.18.9.3.1 : Providing and fixing PVC pipes includings jointing of pipes with one step PVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer in Charge 25 mm dia 12Kgf/cm2	250.0000 metre	180.0000	45000.00	INR Forty Five Thousand Only
2.18	50.18.9.6.1 : Providing and fixing PVC pipes includings jointing of pipes with one step PVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer in Charge. 50 mm dia 10Kgf/cm2	50.0000 metre	220.0000	11000.00	INR Eleven Thousand Only
Total in Figures				7662223.78	
Quoted Rate in Words			INR Seventy Six Lakh Sixty Two Thousand Two Hundred & Twenty Three and Paise Seventy Eight		

Seenu

Seenu

HARIDAS P.S.
GRIDS
DIGITAL SURVEYORS &
ENGINEERING CONSULTANTS
MIG 56, SURABHINAGAR
KAKKANAD, ERNAKULAM - 682 030
Mob : 9495336398

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024