

കേരളം കേരल KERALA

CE 872541

AGREEMENT NO.....278...../KIIDC/2021-22 DATED.....08.10.2021.....

CONTRACT AGREEMENT entered into on this 08th day of October Two Thousand Twenty One between **M/s. Outlook Communications Pvt. Ltd., Plot No. 4B Major Industrial Estate, South Kalamassery, Ernakulam – 683 104** (hereinafter called the Contractor) on the one part and the **Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Ltd. (KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackai P.O, Thiruvananthapuram – 695 024** for and on behalf of the Company (hereinafter called the Company) on the other part for the work for and on behalf of the Company (hereinafter called the Company) on the other part for the work **“Construction of Parking Yard, Compound Fencing, Service Block, Ambient Lighting and Modular Kitchen at Eco Lodge Peermade”** by the former as per accompanying agreement, accepted tender with conditions of contract, plans, accepted schedule with specifications approved by **Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Ltd.**

For Outlook Communications (P) Ltd.

MD
Director

R. Ayyappa Menon

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

No: 17939 Date: 30/9/2021


Value of Rs. 50/-

Sole to: Outlook Communications (P) Ltd.

To be linked with Sl. No:

R. Ayyappa Menon
R. AYYAPPA MENON
STAMP VENDOR
EDAPPALLY



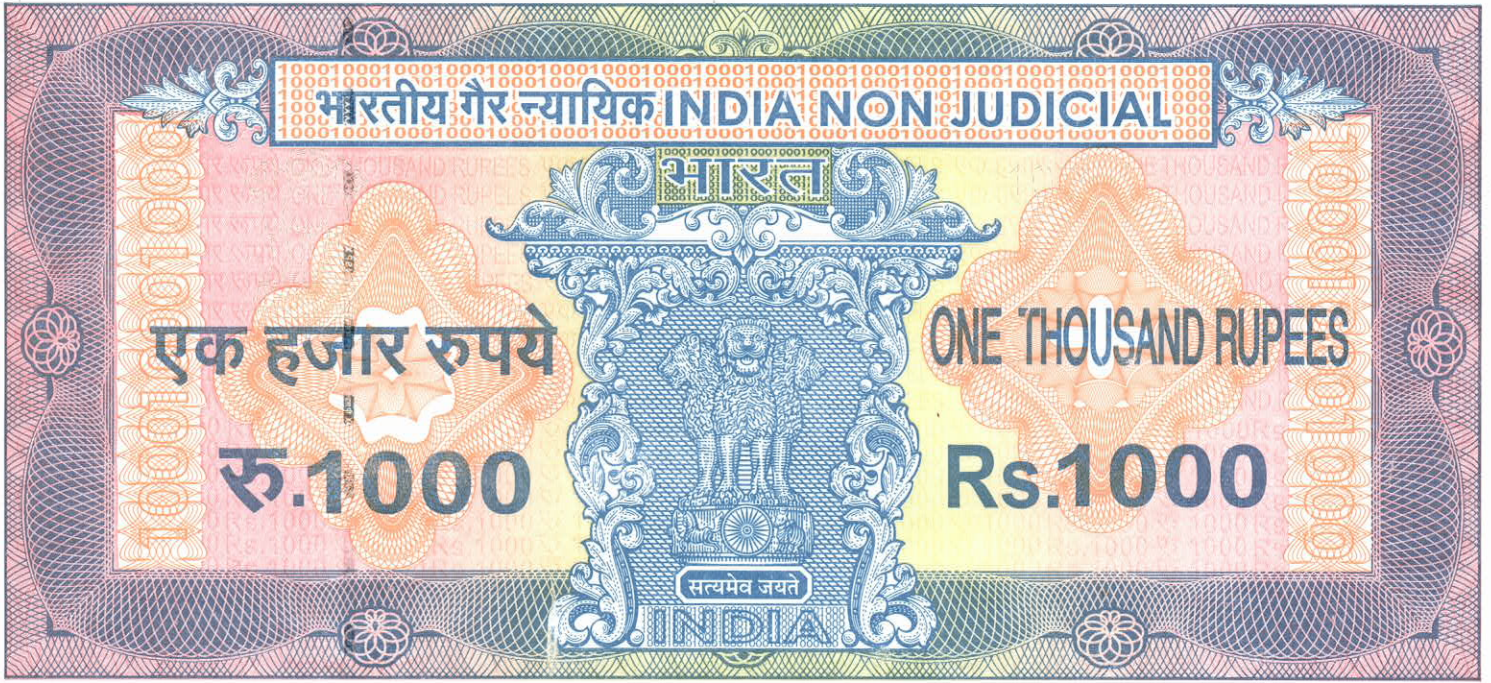

കേരളം केरल KERALA

W 773156

Signed and delivered by **Chief Engineer, Kerala Irrigation Infrastructure Development Corporation Ltd. (KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackai P.O, Thiruvananthapuram – 695 024, for and on behalf of the Company.**

Aleekand.

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Limited
(for and on behalf of the Company)

In the presence of:

1.

2.

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

For Outlook Communications (P) Ltd

MD
Director

MD Mariya Simla

No: 17937 Date: 30/9/2021


Value of Rs. 1000/-

Sold to: Outlook Communications (P) Ltd.

To be linked with J. No: S. Kalamassery.

R. Ayyappa Menon
R. AYYAPPA MENON
STAMP VENDOR
EDAPPALLY



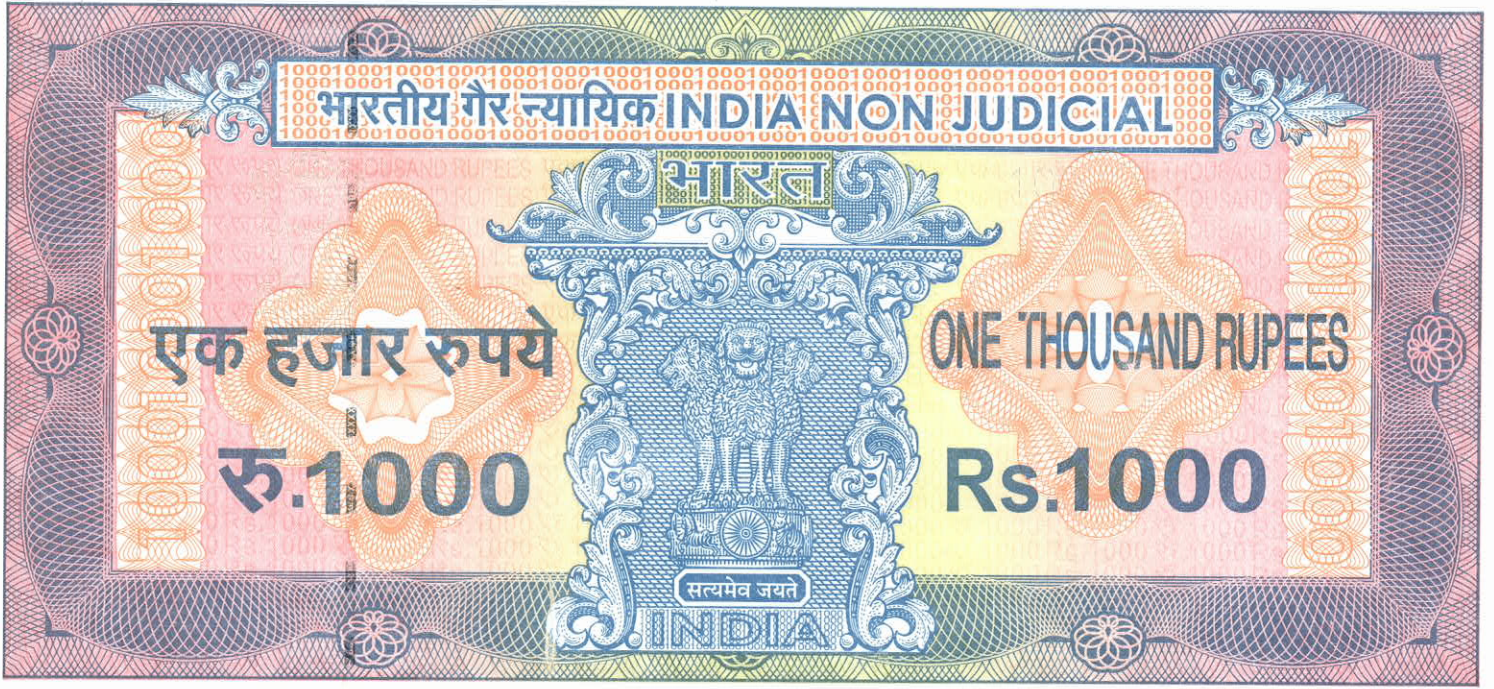

കേരളം കേരल KERALA

W 773155

(KIIDC), T.C. 84/3, NH66 Bypass Service Road, Near Eanchakkal Jn., Chackal P.O, Thiruvananthapuram – 695 024, which form part of this agreement.

Signed and delivered by the above mentioned M/s. Outlook Communications (P) Ltd., Plot No. 4B Major Industrial Estate, South Kalamassery, Ernakulam - 683 104.

Sreedhar

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

Contractor

In the presence of:

1.

[Signature]

Mariya Simla

For Outlook Communications (P) Ltd.

[Signature]

Director

2.

For Outlook Communications (P) Ltd.


[Signature]
Director

No: 12936 Date: 20/8/2021
Value of Rs: 1000/-
Sold to: _____
To be: _____

Outlook Communications (P) Ltd.
S. Kalamassery.



[Signature]
R. ANNYAPPA MENON
STAMPED WITNESS

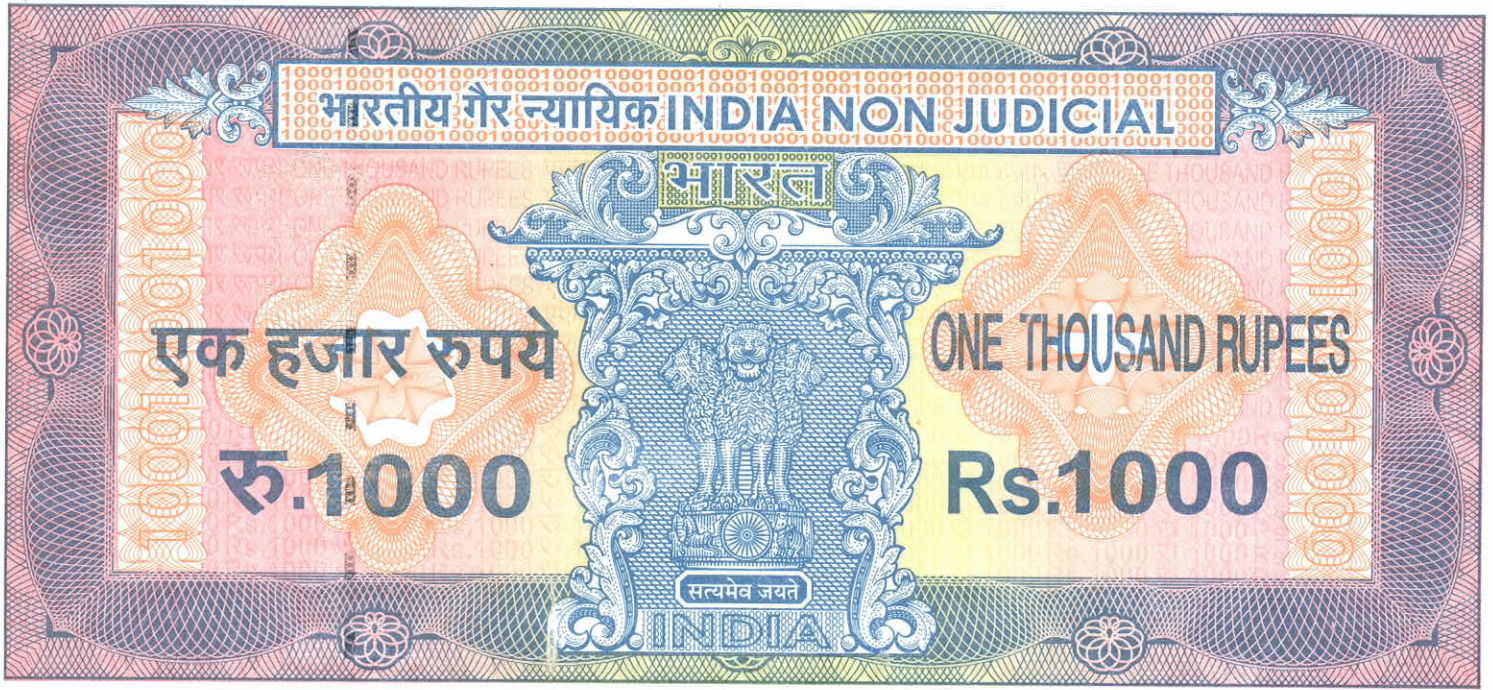

കേരളം കേരल KERALA

W 773157

MEMORANDUM OF WORK TENDERED

Name of work	CONSTRUCTION OF PARKING YARD, COMPOUND FENCING, SERVICE BLOCK, AMBIENT LIGHTING AND MODULAR KITCHEN AT ECOLOGDE PEERMADE
Estimate P.A.C	Rs. 80,27,793/-
Contract P.A.C	Rs. 80,27,681.98
Date of starting	The work should be started within 10 days after executing agreement.
Date of completion	12 months from the date of handing over the site.
Performance Guarantee	Treasury FD for an amount of Rs.1,20,500/- JL 1866229 dated 01.10.2021 for 72 Months 28 Days. Bank Guarantee from Union Bank of India, Edappally Branch vide BG No. 08932IGL0001221 dated 28.09.2021 for Rs. 1,20,425/- valid up to 27.09.2022.

For Outlook Communications (P) Ltd.

Director

Contractor

Sreedhar

Chief Engineer
KIIDC

No. 17938 Dated 20/08/2021

Value of Rs. (1000)

Sold to

To be inserted in Nos.


out look Communications (P) Ltd.
S. Kalamassery.

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation
Thiruvananthapuram - 695

25 AUG 2021

R. AYAPPA MENON
STAMP VENDOR
EDAPPALLY



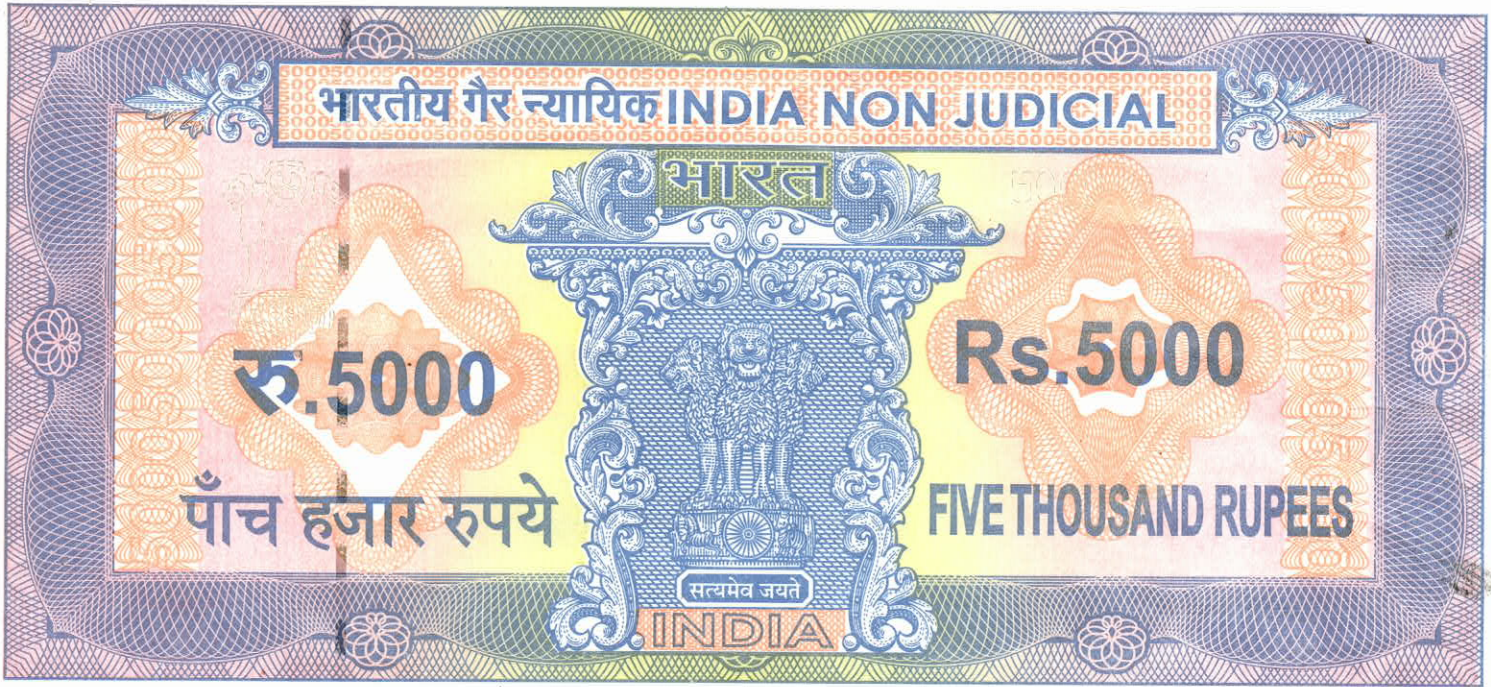

കേരളം केरल KERALA

C 284386

C 284386

For Outlook Communications (P) Ltd.


Director

Alleanect.

No.: 17925 Date: 30/9/2021

Value of Rs. 5000/-

Sold to:


To be linked with S. No:

Outlook Communications (P) Ltd.

S. Kalamassery.

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024




R. AYYAPPA MENON
STAMP VENDOR
EDAPPALLY

Item Rate Boq

Tender Inviting Authority: KERALA IRRIGATION INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

Work Name : CONSTRUCTION OF PARKING YARD, COMPOUND FENCING, SERVICE BLOCK, AMBIENT LIGHTING AND MODULAR KITCHEN AT ECOLOGDE PEERMAD

Contract No: KIILDCTender/407/2021-22

Bidder Name : Outlook Communications Pvt Ltd.

PRICE SCHEDULE

(This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevant columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)

NUMBER	TEXT #	NUMBER #	Quantity	TEXT #	Units	Estimated Rate	NUMBER	BASIC RATE In Figures To be entered by the Bidder Rs. P	NUMBER #	TOTAL AMOUNT Without Taxes	NUMBER #	TOTAL AMOUNT In Words	TEXT #
1	2		4	5			6	13		53		55	
1	FENCING							200					
1.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil		81.0000		cum					16200.00		INR Sixteen Thousand Two Hundred Only	
1.02	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)		13.5000		cum			7000.0000		94500.00		INR Ninety Four Thousand Five Hundred Only	
1.03	7.1.1 : Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) up to plinth level with:Cement mortar 1:6 (1 cement : 6 coarse sand)		56.2500		cum			6500.0000		365625.00		INR Three Lakh Sixty Five Thousand Six Hundred & Twenty Five Only	
1.04	7.2.1 : Random rubble masonry with hard stone in superstructure above plinth level and upto floor five Eye Overlook & Drivelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) at window sills, ceiling level and the like.Cement mortar 1:6 (1 cement : 6 coarse sand)		42.5120		cum			6980.9900		296775.85		INR Two Lakh Ninety Six Thousand Seven Hundred & Seventy Five and Paise Eighty Five Only	


Chief Engineer

1.05	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	8.7080 cum	7500.0000	65310.00	INR Sixty Five Thousand Three Hundred & Ten Only
1.06	10.16.1 : Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolting with special shaped washers etc. complete. Hot finished welded type tubes	2993.4450 kg	150.0000	449016.75	INR Four Lakh Forty Nine Thousand & Sixteen and Paise Seventy Five Only
1.07	10.2 : Structural steel work riveted, bolted or welded in built up sections, trusses and framed work, including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer all complete.	4964.0000 kg	140.0000	694960.00	INR Six Lakh Ninety Four Thousand Nine Hundred & Sixty Only
1.08	16.70.2 : Providing and fixing G.I. chain link fabric fencing of required width in mesh size 50x50 mm including strengthening with 2 mm dia wire or nuts, bolts and washers as required complete as per the direction of Engineer-in-charge. Made of G.I wire of dia 4 mm. PVC coated to achieve outer dia. not less than 5 mm in required colour and shade	637.5000 sqm	1000.0000	637500.00	INR Six Lakh Thirty Seven Thousand Five Hundred Only
2	SERVICE BLOCK EL				
2.01	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed. All kinds of soil	18.8850 cum	181.8500	3434.24	INR Three Thousand Four Hundred & Thirty Four and Paise Twenty Four Only
2.02	2.31 : Clearing Jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared	1200.0000 sqm	12.5500	15060.00	INR Fifteen Thousand & Sixty Only
2.03	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	10.9170 cum	6126.2500	66880.27	INR Sixty Six Thousand Eight Hundred & Eighty and Paise Twenty Seven Only
2.04	7.1.1 : Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) up to plinth level with Cement mortar 1:6 (1 cement : 6 coarse sand)	16.9980 cum	6120.8000	104041.36	INR One Lakh Four Thousand & Forty One and Paise Thirty Six Only

For Outdoor Communications (H)

Director

Sheena A.

Chief Engineer
Kerala Irrigation Infrastructure

2.05	7.2.1 : Random rubble masonry with hard stone in superstructure above plinth level and upto floor five level, including leveling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) at window sills, ceiling level and the like; Cement mortar 1:6 (1 cement : 6 coarse sand)	13.4300	cum					7489.9500	100590.03	INR One Lakh Five Hundred & Ninety and Paise Three Only
2.06	5.9.5 : Centering and shuttering including strutting, etc. and removal of form for: Lintels, beams, plinth beams, girders, brassumers and cantilevers	16.7880	sqm					552.0500	9267.82	INR Nine Thousand Two Hundred & Sixty Seven and Paise Eighty Two Only
2.07	5.1.2 : Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level: 1:1.5:3 (1 cement 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size)	3.3590	cum					7718.2500	25925.60	INR Twenty Five Thousand Nine Hundred & Twenty Five and Paise Sixty Only
2.08	5.3 : Reinforced cement concrete work in beams, suspended floors, roofs, having slope up to 15⁰</sup> landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases up to floor five level excluding the cost of centering, shuttering, finishing and reinforcement, with 1:1.5:3 (1 cement : 1.5 coarse sand (Zone III) : 3 graded stone aggregate 20 mm nominal size).	1.1580	cum					9763.8000	11306.48	INR Eleven Thousand Three Hundred & Six and Paise Forty Eight Only
2.09	5.5 : Reinforced cement concrete work in arches, arch ribs, domes, vaults, shells, folded plate and roofs having slope more than 15 up to floor five level excluding the cost of centering, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand (Zone III) : 3 graded stone aggregate 20 mm nominal size)	10.8750	cum					10289.0000	111892.88	INR One Lakh Eleven Thousand Eight Hundred & Ninety Two and Paise Eighty Eight Only
2.1	5.22A.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete above plinth level: Thermo - Mechanically Treated bars of grade Fe-500D or more	2199.2820	kg					83.5000	183640.05	INR One Lakh Eighty Three Thousand Six Hundred & Forty and Paise Five Only
2.11	11.41.2 : Providing and laying vitrified floor tiles in different sizes (thickness to be specified by the manufacturer) with water absorption less than 0.08% and conforming to IS : 15622, of approved make, in all colours and shades, laid on 20 mm thick cement mortar 1:4(1 cement : 4 coarse sand), including grouting the joints with white cement and matching pigments etc., complete. Size of Tile 600 x 600 mm.	67.0420	sqm					1500.5500	100599.87	INR One Lakh Five Hundred & Ninety Nine and Paise Eighty Seven Only
2.12	50.6.1.1 : Solid block masonry using pre cast solid blocks (factory made) of size 40x20x20cm or nearest available size conforming to IS 2185 part 1 of 1979 for foundation and plinth with thickness 20 cm and above CM 1:6 (1 cement : 6 coarse sand) etc complete	44.7060	cum					6000.0000	268236.00	INR Two Lakh Sixty Eight Thousand Two Hundred & Thirty Six Only

For Available Size Reinforcing Bars (P.111)
 M. S. CM 1:6 (1 cement : 6 coarse sand) etc complete
 Director

Shanmuganathan Engineer
 Kerala Irrigation Infrastructure
 Development Corporation Ltd.
 605024

2.13	13.1.1 : 12 mm cement plaster of mix:1:4 (1 cement : 4 fine sand)	270.8800	sqm	266.8500	72284.33	INR Seventy Two Thousand Two Hundred & Eighty Four and Paise Thirty Three Only
2.14	13.43.1 : Applying one coat of water thinnable cement primer of approved brand and manufacture on wall surface.Water thinnable cement primer	379.6300	sqm	60.0000	22777.80	INR Twenty Two Thousand Seven Hundred & Seventy Seven and Paise Eighty Only
2.15	13.84.2 : Painting with synthetic enamel paint, having VOC (Volatile Organic Compound) content less than 150 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour. Two coats	379.8300	sqm	200.0000	75966.00	INR Seventy Five Thousand Nine Hundred & Sixty Six Only
2.16	12.48 : Providing & fixing on roof pressed clay tile (Mangalore tile) of 20 mm nominal thickness and of approved size and as per approved pattern on steel frame work complete (steel frame work to be paid separately)	108.7500	sqm	324.4000	35278.50	INR Thirty Five Thousand Two Hundred & Seventy Eight and Paise Fifty Only
2.17	12.49 : Providing & laying on roof pressed clay tile ridge (Mangalore tile) of 20 mm thickness and of approved pattern on steel frame work complete (steel frame work to be paid separately).	14.5000	metre	72.2000	1046.90	INR One Thousand & Forty Six and Paise Ninety Only
2.18	50.9.1.1 : Providing wood work in frames of doors, windows, clerestory windows and other frames, wrought framed and fixed in position with hold fast lugs or with dash fasteners of required dia & length (hold fast lugs or dash fastener shall be paid for separately), using good quality Anjili wood /jack wood	0.7540	cum	15000.0000	11310.00	INR Eleven Thousand Three Hundred & Ten Only
2.19	9.7.1 : Providing and fixing panelling or panelling and glazing in panelled or panelled and glazed shutters for doors, windows and clerestory windows (Area of opening for panel inserts excluding portion inside grooves or rebates to be measured), Panelling for panelled or panelled and glazed shutters 25 mm to 40 mm thick;Second class teak wood	24.3610	sqm	2942.3000	71677.37	INR Seventy One Thousand Six Hundred & Seventy Seven and Paise Thirty Seven Only
2.2	9.9.1.1 : Providing and fixing glazed shutters for door, windows and clerestory windows using 4 mm thick float glass panes including ISI marked M.S. Pressed butt hinges bright finished of required size with necessary screws.Second class teak wood35 mm thick	5.0000	sqm	4353.7500	21768.75	INR Twenty One Thousand Seven Hundred & Sixty Eight and Paise Seventy Five Only
2.21	17.31 : Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers complete.	7.0000	each	1283.0500	8981.35	INR Eight Thousand Nine Hundred & Eighty One and Paise Thirty Five Only
2.22	17.35.1.1 : Providing and fixing soil, waste and vent pipes:100 mm diaSand cast iron S & S pipe as per IS : 1729	7.0000	metre	1008.2000	7057.40	INR Seven Thousand & Fifty Seven and Paise Forty Only

For Outlook Communications (P) Ltd.

Director

Prakash Kumar

Kerala Irrigation Infrastructure Development Corporation Ltd.
Thiruvananthapuram - 695024

2.23	17.60.1.1 : Providing and fixing trap of self cleansing design with screwed down or hinged grating without vent arm complete, including cost of cutting and making good the walls and floors:100 mm inlet and 100 mm outlets and cast iron S & S as per IS : 3989	7.0000	each					1512.5500	10587.85	INR Ten Thousand Five Hundred & Eighty Seven and Paise Eighty Five Only
2.24	od29492/2020_2021 : Providing and fixing Chlorinated Polyvinyl Chloride (PVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings. This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer-in-Charge. External work; 75 mm nominal inner dia pipes	30.0000	metre					300.0000	9000.00	INR Nine Thousand Only
2.25	od29493/2020_2021 : (observed Data) Providing and fixing CHR O. Head shower (1985 JAGUAR) of approved quality.	4.0000	each					3600.0000	14400.00	INR Fourteen Thousand Four Hundred Only
2.26	od29494/2020_2021 : (observed Data) Providing and fixing 477 CHR Shower arm Light of approved quality.	4.0000	each					1000.0000	4000.00	INR Four Thousand Only
2.27	od29495/2020_2021 : (observed Data) Providing and fixing (UN0002) Universal Angle Cock of approved quality.	4.0000	each					2000.0000	8000.00	INR Eight Thousand Only
2.28	od29496/2020_2021 : (observed Data) Providing and fixing (579 CHR) HEALTH FAUCET of approved quality.	4.0000	each					1500.0000	6000.00	INR Six Thousand Only
2.29	od29497/2020_2021 : 17.33 Providing and fixing Corner glass shelf with edges round off supported on anodised aluminium; angle frame with C.P. brass brackets and guard rail complete fixed with 40 mm long screws, rawl plugs; etc., complete. (modified)	7.0000	each					3000.0000	21000.00	INR Twenty One Thousand Only
2.3	od29498/2020_2021 : 18.16 Providing and fixing (089 ALD c) stop cock of approved quality; 18.16.1 15 mm nominal bore (modified)	7.0000	each					2100.0000	14700.00	INR Fourteen Thousand Seven Hundred Only
2.31	od29499/2020_2021 : 18.65 Providing and fixing CP Soap Dish Doible; concealed fitting arrangements, weighing not less than 106 gms. (modified)	7.0000	each					1200.0000	8400.00	INR Eight Thousand Four Hundred Only
2.32	od29500/2020_2021 : Providing and fixing C.P. brass bib cock of approved quality conforming to IS:8931; 18.49.1 15 mm nominal bore	7.0000	each					3000.0000	21000.00	INR Twenty One Thousand Only
2.33	od29501/2020_2021 : Providing and fixing Towel Rack SS 24; M-Brand of approved quality	4.0000	each					2500.0000	10000.00	INR Ten Thousand Only
For 2020-21	od29502/2020_2021 : Providing and fixing Cavier SS towel rack complete with brackets fixed to wooden cleats with CP brass; screws with concealed fitting arrangement of approved quality and colour. (modified)	7.0000	each					1400.0000	9800.00	INR Nine Thousand Eight Hundred Only



Director

K. P. S. Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.

2.35	od29503/2020_2021 : 17.34 Providing and fixing toilet paper holder. 17.34.1 C.P. brass(modified) 	4.0000	each			1500.0000	6000.00	INR Six Thousand Only
2.36	od29504/2020_2021 : Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps.32 mm C.P. brass waste. of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever. require:(modified) 17.7.7.1White Vitreous China Wash basin size 630x450 mm with a pair of 15 mm C.P. brass pillar taps. 	7.0000	each			3900.0000	27300.00	INR Twenty Seven Thousand Three Hundred Only
2.37	od29505/2020_2021 : Providing and fixing white vitreous china pedestal type water closet (European type) with seat and lid, 10. litre low level white vitreous china flushing cistern & C.P. flush bend with fittings & C.I.brackets, 40 mm. flush bend, overflow arrangement with specials of standard make and mosquito proof coupling or. approved municipal design complete, including painting of fittings and brackets, cutting and making. good the walls and floors wherever required. 17.3.1W.C. pan with ISI marked white solid plastic seat and lid. 	7.0000	each			20000.0000	140000.00	INR One Lakh Forty Thousand Only
2.38	18.8.2 : Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes& fittings, with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer-In-Charge. Concealed work, including cutting chases and making good the wall etc.20 mm nominal outer dia pipes	42.0000	metre			478.1500	20082.30	INR Twenty Thousand & Eighty Two and Paise Thirty Only
2.39	18.8.4 : Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes& fittings, with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer-In-Charge. Concealed work, including cutting chases and making good the wall etc.32 mm nominal outer dia pipes	35.0000	metre			679.1500	23770.25	INR Twenty Three Thousand Seven Hundred & Seventy and Paise Twenty Five Only

For Outlook Communications (P) Ltd.

Director

Sheeja

Chief Engineer

Kerala Irrigation Infrastructure Development Corporation Ltd.
Development Corporation - 695024
Pattanamthapuram

2.4	18.9.6 : Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings. This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer-in-Charge. External work: 50 mm nominal outer dia pipes	30.0000	metre	791.6500	23749.50	INR Twenty Three Thousand Seven Hundred & Forty Nine and Paise Fifty Only
2.41	12.41.2 : Providing and fixing on wall face unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion, (i) Single socketed pipes, 110 mm diameter	50.0000	metre	305.0500	15252.50	INR Fifteen Thousand Two Hundred & Fifty Two and Paise Fifty Only
2.42	12.42.4.2 : Providing and fixing on wall face unplasticised- PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion: Single tee without door 110x110x110 mm	7.0000	each	188.5500	1319.85	INR One Thousand Three Hundred & Nineteen and Paise Eighty Five Only
2.43	12.42.5.2 : Providing and fixing on wall face unplasticised- PVC moulded fittings/ accessories for unplasticised Rigid PVC rain water pipes conforming to IS : 13592 Type A, including jointing with seal ring conforming to IS : 5382, leaving 10 mm gap for thermal expansion: Bend 87.5⁰¹110 mm	11.0000	each	129.8500	1428.35	INR One Thousand Four Hundred & Twenty Eight and Paise Thirty Five Only
2.44	11.46.2 : Providing and laying Vitrified tiles indifferent sizes (thickness to be specified by manufacturer), with water absorption less than 0.08 % and conforming to I.S. 15622, of approved make, in all colours & shade, in skirting, riser of steps, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand), including grouting the joint with white cement & matching pigments etc. complete. Size of Tile 600x600 mm	25.0000	sqm	1545.8500	38646.25	INR Thirty Eight Thousand Six Hundred & Forty Six and Paise Twenty Five Only
3	SECURITY CABIN					
3.01	7.1.1 : Random rubble masonry with hard stone in foundation and plinth including levelling up with cement concrete 1:6:12 (1 cement : 6 coarse sand : 12 graded stone aggregate 20 mm nominal size) up to plinth level with: Cement mortar 1:6 (1 cement : 6 coarse sand)	2.8810	cum	6120.8000	17634.02	INR Seventeen Thousand Six Hundred & Thirty Four and Paise Two Only
3.02	2.8.1 : Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil	1.9200	cum	252.3000	484.42	INR Four Hundred & Eighty Four and Paise Forty Two Only

Director

Keerthi Sineer
 Kerala Irrigation Infrastructure
 Development Corporation Ltd.
 Thiruvananthapuram - 695024

3.03	4.1.6 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:3:6 (1 cement : 3 coarse sand : 6 graded stone aggregate 40 mm nominal size)	0.4800	cum	6126.2500	2940.60	INR Two Thousand Nine Hundred & Forty and Paise Sixty Only
3.04	50.6.1.6 : Solid block masonry using pre cast solid blocks (Factory made) of size 30x20x20cm or nearest available size conforming to IS 2185 part I of 1979 for super structure above floor two level upto floor five level thickness 20cm and above in : CM 1:6 (1 cement : 6 coarse sand sand) etc complete	4.3260	cum	6000.0000	25956.00	INR Twenty Five Thousand Nine Hundred & Fifty Five and Paise One Hundred Only
3.05	5.1.2 : Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level:1:1.5:3 (1 cement 1.5 coarse sand : 3 graded stone aggregate 20 mm nominal size	1.1060	cum	7718.2500	8536.38	INR Eight Thousand Five Hundred & Thirty Six and Paise Thirty Eight Only
3.06	5.22A.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete above plinth level:Thermo - Mechanically Treated bars of grade Fe-500D or more	78.2300	kg	83.5000	6532.21	INR Six Thousand Five Hundred & Thirty Two and Paise Twenty Only
3.07	13.1.1 : 12 mm cement plaster of mix:1:4 (1 cement : 4 fine sand)	67.1620	sqm	266.8500	17922.18	INR Seventeen Thousand Nine Hundred & Twenty Two and Paise Eighteen Only
3.08	13.84.1 : Painting with synthetic enamel paint, having VOC (Volatile Organic Compound) content less than 150 grams/ litre. of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour:One coat	67.1620	sqm	800.0000	53729.60	INR Fifty Three Thousand Seven Hundred & Twenty Nine and Paise Sixty Only
3.09	13.85.3 : Applying priming coats with primer of approved brand and manufacture, having low VOC (Volatile Organic Compound) content:With water thinnable cement primer on walls surface having VOC content less than 50 grams / litre	67.1620	sqm	60.0000	4029.72	INR Four Thousand & Twenty Nine and Paise Seventy Two Only
3.1	5.47.2 : Providing and fixing in position factory made precast RCC M-40 doors and win frames having excellent smooth finish as per IS:6523 with reinforcement of 3 Nos, 6 mm dia main bars tied with 3 mm M.S stirrups placed @ 200 mm CC nad 6 numbers high strength polymer blocks of required size for fixing hinges including providing 6 no specially designed M.S galvanised sleeves for accommodating 6 mm dia fully threaded bolts for fixing hold fast on vertical members, providing suitable arrangement for receiving sliding door bolts and tower bolt etc all complete, as per the direction of Engineer in charge. (The cost of hold fast and cc block of 1:3:6 mix is also included in the item.) The frame shall be measured in frame 100 mm x 60 mm.	9.6000	metre	617.9000	5931.84	INR Five Thousand Nine Hundred & Thirty One and Paise Eighty Four Only

For Unitwork & Reinforcement rates of decimal: Door

Frame 100 mm x 60 mm.

Director

Seenaath

Chief Engineer
Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

3.11	50.9.4.1 : Providing and fixing paneling or paneling and glazing in paneled or paneled and glazed shutters for doors, windows and clerestory windows (Area of opening for panel inserts excluding portion inside grooves or rebates to be measured) paneling for paneled or paneled and glazed shutters 25 mm to 40 mm thick using good quality Anjili/ Jack wood	2.6000	sqm			500.0000	1300.00	INR One Thousand Three Hundred Only
3.12	50.9.5.1 : Providing and fixing glazed shutters for doors, windows and clerestory windows using 4 mm thick float glass panes including ISI marked MIS pressed butt hinges bright finished of required size with necessary screws. Using Anjili wood/ jack wood 35 mm thick shutters.	0.2400	sqm			500.0000	120.00	INR One Hundred & Twenty Only
3.13	9.7.6 : Providing and fixing bright finished brass 100 mm mortice latch and lock with 6 levers and a pair of lever handles of approved quality with necessary screws etc. complete.	1.0000	no			712.7500	712.75	INR Seven Hundred & Twelve and Paise Seventy Five Only
4	EPABX installation							
4.01	od96081/2020_2021 : Writing charges for installing Crystal Digital 16 Line Intercom EPABX including all materials, labour charges and testing of EPABX.	550.0000	metre			181.0000	99550.00	INR Ninety Nine Thousand Five Hundred & Fifty Only
4.02	od96082/2020_2021 : Supplying and installing Crystal Digital 16 Line Intercom EPABX (writing materials and wiring labour charges should be paid separately)	1.0000	no			25000.0000	25000.00	INR Twenty Five Thousand Only
5	ELECTRICAL WORKS							
5.01	1.10.3 : Wiring for light point/ fan point/ exhaust fan point/ call bell point with 1.5 sq.mm FRLS PVC insulated copper conductor single core cable in surface / recessed medium class PVC conduit, with modular switch, modular plate, suitable GI box and earthing the point with 1.5 sq.mm. FRLS PVC insulated copper conductor single core cable etc as required. Group C	22.0000	point			990.0000	21780.00	INR Twenty One Thousand Seven Hundred & Eighty Only
5.02	1.14.1 : Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface / recessed medium class PVC conduit as required 2x1.5 sq.mm + 1x1.5 sq.mm earth wire	60.0000	metre			146.0000	8760.00	INR Eight Thousand Seven Hundred & Sixty Only
5.03	1.14.2 : Wiring for circuit/ submain wiring alongwith earth wire with the following sizes of FRLS PVC insulated copper conductor, single core cable in surface / recessed medium class PVC conduit as required 2x2.5 sq. mm + 1x2.5 sq. mm earth wire	30.0000	metre			167.0000	5010.00	INR Five Thousand & Ten Only
5.04	1.17.3 : Supplying and drawing following sizes of FRLS PVC insulated copper conductor, single core cable in the existing surface / recessed steel/ PVC	30.0000	metre			54.0000	1620.00	INR One Thousand Six Hundred & Twenty Only

For Online Government e-tenders @ <http://www.pwssl.com>

Director

Signature
Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

5.05	1.12 : Wiring for light power plug with 2X4 sq. mm FRLS PVC Insulated copper conductor single core cable in surface/ recessed medium class PVC conduit along with 1 No 4 sq. mm FRLS PVC insulated copper conductor single core cable for loop earthing as required.	30.0000	metre			200.0000	6000.00	INR Six Thousand Only
5.06	1.24.1 : Supplying and fixing following modular switch/socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 5/6 amps switch	5.0000	each			85.0000	425.00	INR Four Hundred & Twenty Five Only
5.07	1.24.4 : Supplying and fixing following modular switch/socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 3 pin 5/6 amp socket outlet	3.0000	each			111.0000	333.00	INR Three Hundred & Thirty Three Only
5.08	1.24.3 : Supplying and fixing following modular switch/socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 15/16 amp switch	30.0000	each			132.0000	3960.00	INR Three Thousand Nine Hundred & Sixty Only
5.09	90.10.3.15 : Supply and Fixing the following modular switches & accessories in the existing front plates and giving necessary connections as required (RoHS compliant)	4.0000	each			500.0000	2000.00	INR Two Thousand Only
5.1	1.24.5 : Supplying and fixing following modular switch/socket on the existing modular plate & switch box including connections but excluding modular plate etc. as required. 6 pin 15/16 amp socket outlet	30.0000	each			175.0000	5250.00	INR Five Thousand Two Hundred & Fifty Only
5.11	90.10.1.2 : Supply & Fixing the following types/ sizes of boxes suitable for modular accessories in surface/ recess including making good the damages, colour washing etc as required (RoHS compliant)	16.0000	each			300.0000	4800.00	INR Four Thousand Eight Hundred Only
5.12	90.10.1.1 : Supply & Fixing the following types/ sizes of boxes suitable for modular accessories in surface/ recess including making good the damages, colour washing etc as required (RoHS compliant)	4.0000	each			300.0000	1200.00	INR One Thousand Two Hundred Only
5.13	1.27.1 : Supplying and fixing following size/ modules, GI box alongwith modular base & cover plate for modular switches in recess etc as required. 1 or 2 Module (75mmX75mm)	2.0000	each			243.0000	486.00	INR Four Hundred & Eighty Six Only
5.14	2.10.1 : Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required. Single pole	7.0000	each			199.0000	1393.00	INR One Thousand Three Hundred & Ninety Three Only

Received.

Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

For Outlook Communications (P) Ltd.
Director

5.15	2.10.3 : Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required. Double pole	1.0000	each			556.0000	556.00	INR Five Hundred & Fifty Six Only
5.16	90.11.1.14 : Supply and installation of sheet steel, phosphatised and painted, dust and vermin proof enclosure of MCB DB including copper /brass bus bar, neutral link, earth bus and DIN rail suitable for fixing MCB/ isolator etc. fixed on wall using suitable anchor bolts or fixed in recess including cutting hole on the wall, making good the damages, colour washing etc. as required	1.0000	each			5300.0000	5300.00	INR Five Thousand Three Hundred Only
5.17	2.3.1 : Supplying and fixing following way, single pole and neutral, sheet steel, MCB distribution board, 240 V, on surface/ recess, complete with timed copper bus bar, neutral bus bar, earth bar, din bar, interconnections, powder painted including earthing etc. as required. (But without MCB/RCCB/isolator6 way, Double door	1.0000	each			1661.0000	1661.00	INR One Thousand Six Hundred & Sixty One Only
5.18	2.14.1 : Supplying and fixing following rating, double pole, (single phase and neutral), 240 volts, residual current circuit breaker (RCCB), having a sensitivity current upto 300 milliamperes in the existing MCB DB complete with connections, testing and commissioning etc. as required. 25 amps	1.0000	each			1927.0000	1927.00	INR One Thousand Nine Hundred & Twenty Seven Only
5.19	2.10.5 : Supplying and fixing 5 amps to 32 amps rating, 240/415 volts, "C" curve, miniature circuit breaker suitable for inductive load of following poles in the existing MCB DB complete with connections, testing and commissioning etc. as required. Triple pole and neutral	1.0000	each			1092.0000	1092.00	INR One Thousand & Ninety Two Only
5.2	2.15.2 : Supplying and fixing following rating, four pole, (three phase and neutral), 415 volts, residual current circuit breaker (RCCB), having a sensitivity current upto 300 milliamperes in the existing MCB DB complete with connections, testing and commissioning etc. as required. 40 amps	1.0000	each			2626.0000	2626.00	INR Two Thousand Six Hundred & Twenty Six Only
5.21	1.33 : Supplying and fixing 3 pin, 5 amp ceiling rose on the existing junction box/ wooden blockincluding connection etc as required.	22.0000	each			65.0000	1430.00	INR One Thousand Four Hundred & Thirty Only
5.22	1.34 : Supplying and fixing brass batter/ angle holder including connection etc. as required.	5.0000	each			117.0000	585.00	INR Five Hundred & Eighty Five Only

For Outlook Communications (P) Ltd.


Director


Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

5.23	od331350/2020_2021 : Supply, conveyance, installation, testing and commissioning of ceiling fans of the following sizes using standard accessories excluding resistance type regulator, wiring the down rod with 16/0.20mm PVC insulated and PVC sheathed 650/1100V grade 3 core round copper conductor flex wire or with extended original wiring etc. as required. 900mm sweep -5star rated ceiling fan complete with 300mm down rod , canopies, shackles and blades and resistance type regulator working on 230V/240V single phase A/C. 	3.0000	each			12000.0000	36000.00	INR Thirty Six Thousand Only
5.24	od337855/2020_2021 : Supply, conveyance, installation, testing and commissioning of ceiling fans of the following sizes using standard accessories excluding resistance type regulator, wiring the down rod with 16/0.20mm PVC insulated and PVC sheathed 650/1100V grade 3 core round copper conductor flex wire or with extended original wiring etc. as required. 1200mm sweep -5star rated ceiling fan complete with 300mm down rod , canopies, shackles and blades and resistance type regulator working on 230V/240V single phase A/C. 	3.0000	each			12000.0000	36000.00	INR Thirty Six Thousand Only
5.25	1.25 : Supplying and fixing two module stepped type electronic fan regulator on the existing modular plate switch box including connections but excluding modular plate etc. as required. 	6.0000	each			342.0000	2052.00	INR Two Thousand & Fifty Two Only
5.26	od331351/2020_2021 : Supply and fixing 9/12 W LED Bulb in existing fitting as required 	7.0000	each			500.0000	3500.00	INR Three Thousand Five Hundred Only
5.27	od51968/2021_2022 : SITC of Ceiling mounted, Chandelier hanging light. Elegant design with antique bronze finish. Superior glass diffuser to minimize glare. Recommended to use with energy saving lamps. 5 x 7.5 W A60 LED filament lamp, IP rating 20, Lamp base E27. (Havells ORNALITE CHANDELIER 1 X 5LS E27 BRZ or equivalent) 	2.0000	each			28000.0000	56000.00	INR Fifty Six Thousand Only
5.28	90.3.19.3 : Supply conveyance, installation, testing and commissioning the light fittings of following types made from CRCA sheet 0.5mm thickness with all accessories and lamps directly on wall and giving connections with 16/0.20 mm 3 core PVC insulated and sheathed round copper conductor flex wire or extending the original wiring and giving connections as required 	8.0000	each			8000.0000	64000.00	INR Sixty Four Thousand Only
5.29	90.12.1.40 : Supply & laying of one number PVC insulated and PVC sheathed armoured aluminium power cable of 1.1kV grade of the following sizes in accordance with the following details:- 1. 35 x 75 cm, refilling the trench etc. as required but excluding sand cushioning and protective covering (in ordinary soil). 	100.0000	metre			150.0000	15000.00	INR Fifteen Thousand Only

Director

For Outgoing Tendering Process

Researched

Engineer

Kerala Irrigation Infrastructure Development Corporation Ltd.

Thiruvananthapuram - 695024

5.3	90.12.10.2 : Supply & laying of DWC pipe in ordinary soil 0.75m below ground level including excavation	400.0000	metre		450.0000	180000.00	INR One Lakh Eighty Thousand Only
5.31	90.16.1.2 : Supply and drawing bare earthing conductors of the following sizes along with wiring/ cables and giving connection as required	400.0000	metre		450.0000	180000.00	INR One Lakh Eighty Thousand Only
5.32	90.12.1.2 : Supply & laying of one number PVC insulated and PVC sheathed armoured aluminium power cable of 1.1KV grade of the following sizes in ground including excavation of trench of size 35 x 75 cm, refilling the trench etc. as required but excluding sand cushioning and protective covering (in ordinary soil).	300.0000	metre		150.0000	45000.00	INR Forty Five Thousand Only
5.33	9.1.1 : Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed / XLPE aluminium conductor cable of 1.1 KV grade as required; 2 X 6 sq. mm (19mm)	2.0000	set		198.0000	396.00	INR Three Hundred & Ninety Six Only
5.34	9.1.32 : Supplying and making end termination with brass compression gland and aluminium lugs for following size of PVC insulated and PVC sheathed / XLPE aluminium conductor cable of 1.1 KV grade as required; 4 X 10 sq. mm (25mm)	8.0000	set		219.0000	1752.00	INR One Thousand Seven Hundred & Fifty Two Only
5.35	od344513/2020_2021 : SITC of 15litre, 2KW, 5star storage water heater with accessories.	4.0000	each		10000.0000	40000.00	INR Forty Thousand Only
5.36	od51591/2021_2022 : Supply, installation, testing and commissioning of 15 kg capacity Professional grade Fully Automatic Washer with Dryer (LG or Equivalent)having a Extractor Front Load Single Phase, 220~240V,50 Hz with Intelligent Electronics Controls and Stainless Steel Drum for Washer with 1 year product warranty and 5 year Motor warranty	1.0000	each		50000.0000	50000.00	INR Fifty Thousand Only
5.37	od51782/2021_2022 : Supply, installation, testing and commissioning of Wall fan of 300mm sweep dia on wall, fixing necessary anchor bolts / bolt and nuts etc., as required including giving connections with the supplied wire along with the Wall fan.
300mm sweep wall fan working on 230 V A/C	1.0000	each		11000.0000	11000.00	INR Eleven Thousand Only
5.38	od51819/2021_2022 : Supply, installation, testing and commissioning of Fully Automatic Dishwasher (IFB or equivalent) with capacity of 15 place settings having Pre-wash and pre-programmed Wash programs with Hot water wash with 70℃ hot water and self cleaning functions having a comprehensive 2 year warranty.	1.0000	each		50000.0000	50000.00	INR Fifty Thousand Only
5.39	od51825/2021_2022 : Supply, installation, testing and commissioning of exhaust fans of size up to 450mm in the existing opening, fixing necessary anchor bolts / connections with the supplied wire along with the exhaust fan. 300/305mm light duty	4.0000	each		5000.0000	20000.00	INR Twenty Thousand Only

For Outdoor connections, PIPED Wires along with the exhaust fan. 300/305mm light duty

Director

Development Corporation Ltd.
Kerala Irrigation Infrastructure
Thiruvananthapuram - 695024

Seenalet
Project Engineer

5.4	od51841/2021_2022 : SITC of Solar LED lighting System with following accessories. (a) All in one Solar LED CSADHMP40 CDL, 40W LED Crompton make / Equilant having 60W solar module Wp with 27 Ah battery having 6800lumens having dimensions(Approx) 955 X 630 X 55 (LWH) having approximate weight of 19Kg (Details attached separately) suitable to fit on tubular pole. (b) Pole :- 3.5/4 Mr. long (clear height -210kg) armless pole of cast iron with bottom dia.200mm with base plate and top dia. 100mm, foundation bolt etc. complete fixed on existing cement concrete foundation etc. as per the directions of engineer at site as required including 3 Year AMC complete.	4.0000	each		85000.0000	340000.00	INR Three Lakh Forty Thousand Only
5.41	od51940/2021_2022 : Supply, installation, testing and commissioning of indoor type electric patio heater,1500W with 3 power settings, overheat protection, infrared heater , instant warm with remote control, wall mount.	11.0000	each		13000.0000	143000.00	INR One Lakh Forty Three Thousand Only
5.42	od51973/2021_2022 : Supply, conveyance , installation, testing and commissioning of Ornamental ceiling fan of wooden finish with 1050 mm (or higher) sweep complete with 1500mm down rod, canopies, shackles and blades using standard accessories excluding resistance type regulator, wiring the down rod with 16/0.20mm PVC insulated and PVC sheathed 650/1100V grade 3 core round conductor flex wire or with extended original wiring etc &dash: Make- Usha /equivalent	2.0000	each		12000.0000	24000.00	INR Twenty Four Thousand Only
5.43	od51987/2021_2022 : Supply, design, testing and commissioning of Full HD 2MP Cameras with a 8 Channel HD DVR of a reputable brand like Honeywell/Hikvision or Equivalent having the following components: 4 nos of Outdoor 2 MP Bullet Varifocal Cameras and 4 nos of Dome Cameras both having CMOS progressive scan, True day/night capability, Minimum illumination: 0 Lux (IR ON) along with a 1Tb Hard Disc Storage and power supply for the system and Wire Roll for connection with all the required Connectors for the proper installation as per the instruction of the site officer and a DVR mouse and 20-inch LED monitor with Optimal resolution: 1600 x 900 at 60 Hz for viewing purposes	1.0000	set		85000.0000	85000.00	INR Eighty Five Thousand Only
6	DIESEL GENERATOR						

For Outlook Communications (P) Ltd.



Director

Signature

Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

6.01	od8869/2021_2022 : Supply, Installation, testing and commissioning of 30KVA, silent type, water cooled, radiator type, electric start DG set with acoustic enclosure and standard control panel. The engine shall be capable of taking 10% overload for one hour after 2 hours of operation, with AMF panel. Alternator-brushless, self excited, self regulated, class H insulation, suitable for continuous operation at 1500rpm generating 415V +/-5V at 0.8pf, 50Hz 0.85 load factor 3phase, 4 wire system.
Baseframe- formed sheet channel, sturdy welded construction for mounting engine, Alternator and Acoustic enclosure	1.0000	each			400000.0000	400000.00	INR	Four Lakh Only
7	DEEP FREEZER								
7.01	od8799/2021_2022 : Supply, Installation, testing and commissioning of 500L double door Deep Freezer of robust construction, temperature range -18 to -22 degree celsius, having high density PUF insulation for better holding time and minimum 1 year manufacturer warranty (Blue star or equivalent)	1.0000	each			38000.0000	38000.00	INR	Thirty Eight Thousand Only
8	REFRIGERATOR								
8.01	od51557/2021_2022 : Supply, installation, testing and commissioning of 290L 2 Star Frost free Double door refrigerator with smart inverter compressor of 10 year warranty and 1 year product warranty (Panasonic or Equivalent) conforming to IS 1476	2.0000	each			35000.0000	70000.00	INR	Seventy Thousand Only
9	MICROWAVE OVEN								
9.01	od51577/2021_2022 : Supply, installation, testing and commissioning of 32L convection microwave oven with 2 year product warranty (Samsung or Equivalent) conforming to IS 11676	1.0000	each			20000.0000	20000.00	INR	Twenty Thousand Only
10	MODULAR KITCHEN								
10.01	od17307/2021_2022 : Supplying and installing LPG pipe line with MS - C class pipe (5 + 5 main holding systems - total 10 cyclenders), gauge, on/off valves, shutt off valves for safety, connecting pipes for burners etc. (charges including one year warranty) including all its conveyance and placing at a suitable location instructed by the engineer in charge.	25.0000	metre			600.0000	15000.00	INR	Fifteen Thousand Only
10.02	od17308/2021_2022 : Supplying and fixing single phase 1440rpm, 2 Hp axial fan with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			19000.0000	19000.00	INR	Nineteen Thousand Only

Director

Deemed to be Officer

10.03	od17309/2021_2022 : Supplying and fixing single phase 1440rpm, 1 Hp axial fan with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			14000.0000	14000.00	INR	Fourteen Thousand Only
10.04	od17310/2021_2022 : Supplying ,providing and fixing GI duct for fresh systems with 24 swg GI sheet including hanging rods ,scaffolding charges,labour charges and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	15.0000	metre			3000.0000	45000.00	INR	Forty Five Thousand Only
10.05	od17311/2021_2022 : Supplying ,providing and fixing GI Ducting for SS Hoods with 24 swg, GI sheet including hanging rods, scaffolding charges and labour charges etc with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	15.0000	metre			3000.0000	45000.00	INR	Forty Five Thousand Only
10.06	od17312/2021_2022 : Supplying , providing and fixing SS wall type clamping hood for tandoor of size 0.80m × 0.80m × 0.60 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			4000.0000	4000.00	INR	Four Thousand Only
10.07	od17313/2021_2022 : Supplying ,providing and fixing ss wall type hanging hood for hot plate/dosa plate of size 1.50m × 0.75m × 0.60m with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			4000.0000	4000.00	INR	Four Thousand Only
10.08	od17314/2021_2022 : Supplying ,providing and fixing box type hanging hood for Chinese/two burner and bulk cooking range of size 2.50m × 1.50m × 0.60m with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			4000.0000	4000.00	INR	Four Thousand Only
10.09	od17315/2021_2022 : Supplying , Providing and fixing stainless steel floor gratings of size (.60mx.30m) and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			3400.0000	3400.00	INR	Three Thousand Four Hundred Only
10.1	od17316/2021_2022 : Supplying and providing two tier stainless steel trolley of size 0.60m × 0.50m × 0.75m including caster wheels and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			13000.0000	13000.00	INR	Thirteen Thousand Only
10.11	od17317/2021_2022 : Supplying ,providing two tier wooden service trolley with stainless steel frame of size 0.75m × 0.55m × 0.75m including caster wheels and all its fittings including all its conveyance .	1.0000	each			16000.0000	16000.00	INR	Sixteen Thousand Only

Director

[Signature]

For Outlets

Kerala Irrigation Infrastructure Development Corporation Ltd.

Chief Engineer

695024

10.12	od17318/2021_2022 : Supplying, providing and fixing stainless steel 5 tier rack of size 1.10m & times: 0.45m & times: 2.00m with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	2.0000	each		15000.0000	30000.00	INR	Thirty Thousand Only
10.13	od17319/2021_2022 : Supplying , providing and fixing stainless steel 5 tier rack of size 1.15m & times: 0.45m & times: 2.00m with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		15000.0000	15000.00	INR	Fifteen Thousand Only
10.14	od17320/2021_2022 : Supplying, providing and installing stainless steel 4 door frost free vertical freezer of capacity 850L with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, & frac34: hp compressor, 220v, 1ph, 4 Doors, Temp. range -15 to -20 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		280000.0000	280000.00	INR	Two Lakh Eighty Thousand Only
10.15	od17321/2021_2022 : Supplying , providing and installing stainless steel 2 door vertical chiller of capacity 500Litres with Body crafted with stainless steel 304, Copland emerson compressor, Digital processing controller, & frac12: hp compressor, 220v, 1ph, 2 Doors, Temp. range +02 to +06 with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		120000.0000	120000.00	INR	One Lakh Twenty Thousand Only
10.16	od17322/2021_2022 : Supplying , providing and fixing 20L wet grinder with stainless steel body including all its fixing including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		45000.0000	45000.00	INR	Forty Five Thousand Only
10.17	od17323/2021_2022 : Supplying, providing and fixing stainless steel work table of size 0.70m & times: 0.70m & times: 0.85m with bottom cross support with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		14000.0000	14000.00	INR	Fourteen Thousand Only
10.18	od17324/2021_2022 : Supplying , providing and fixing stainless steel 304charcoal operated tandoor of size 0.75m & times: 0.75m & times: 0.80m including clay pot with all its fittings including all its conveyance and placing at a suitable location instructed by the	1.0000	each		55000.0000	55000.00	INR	Fifty Five Thousand Only
10.18	od17325/2021_2022 : Supplying , providing and fixing stainless steel two burner cooking range of size 1.10m & times: 0.60m & times: 0.85m with 1 no. T35 burner with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		45000.0000	45000.00	INR	Forty Five Thousand Only

For Outer

Director

Cher Engineer
Kernel Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

10.2	od17381/2021_2022 : Supplying , providing and fixing stainless steel bulk cooking range of size 0.50m × 0.50m × 0.45m with 1 no. G10 burner and 1 no. T35 burner including all its conveyance and placing at a suitable location instructed by the engineer in charge.	2.0000	each		50000.0000	100000.00	INR One Lakh Only
10.21	od17327/2021_2022 : Supplying ,providing and fixing stainless steel three burner unit of size 1.65m × 0.60m × 0.85m + 0.15m with 2 nos of T35 burner, 1 no. of G9 burner, drainage trap, waste collecting tray, backsplash and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		50000.0000	50000.00	INR Fifty Thousand Only
10.22	od17328/2021_2022 : Supplying,providing and fixing stainless steel sink unit of size 0.80m × 0.60m × 0.85m with sunken top including bottom cross support, backsplash and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		25000.0000	25000.00	INR Twenty Five Thousand Only
10.23	od17413/2021_2022 : Supplying and providing stainless work table of size 1.40m × 0.60m × 0.85m with a bottom shelf at a distance of 0.45m from the table top, including all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		14000.0000	14000.00	INR Fourteen Thousand Only
10.24	od17414/2021_2022 : Supplying ,providing and fixing wall mountable stainless steel 2 tiered pot rack of size 1.10m × 0.55m × 0.50m with 10 hooks including all its fittings and conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		15000.0000	15000.00	INR Fifteen Thousand Only
10.25	od17415/2021_2022 : Supplying , providing and fixing stainless steel hot plate for Dosa/Chappathi of size 1.20m × 0.70m × 0.85m with 16mm mild steel plate including oil collecting tray at distance of 0.15m and the three side splash including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		8500.0000	8500.00	INR Eight Thousand Five Hundred Only
10.26	od17329/2021_2022 : Supplying ,providing and fixing stainless steel work table for Dosa, Chapathi with a size of 1.20m × 0.70m × 0.85m with one bottom shelf and three side splash with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each		14000.0000	14000.00	INR Fourteen Thousand Only

Sreeraj
Project Engineer

For Outlook Communications (P) Ltd.

Director

10.27	od17332/2021_2022 : Supplying ,providing and fixing butchery table of size 1.20m × 0.60m × 0.85m with bottom cross support with backslash and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			14000.0000	14000.00	INR	Fourteen Thousand Only
10.28	od17333/2021_2022 : Supplying ,providing and fixing stainless steel draining table of size 0.90m × 0.60m × 0.85m including bottom cross support including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			15000.0000	15000.00	INR	Fifteen Thousand Only
10.29	od17334/2021_2022 : Supplying , providing and fixing stainless steel three sink unit of size 1.65m × 0.60m × 0.85m having bottom cross support and over head plate rack, with backslash and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			30000.0000	30000.00	INR	Thirty Thousand Only
10.3	od17335/2021_2022 : Supplying and providing stainless steel waste dish landing table of size 0.80m × 0.60m × 0.85m with 1 no. chute hole at the centre of the top sink, sunken top and bottom cross support at a distance of 0.15m, with backslash and all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			14000.0000	14000.00	INR	Fourteen Thousand Only
10.31	od17336/2021_2022 : Supplying,providing and fixing stainless steel food pick up counter of size 1.50m × 0.65m × 0.85m with two nos of bottom shelf, with three sides enclosed with stainless steel sheet and two nos of over head shelf including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			16000.0000	16000.00	INR	Sixteen Thousand Only
10.32	od17337/2021_2022 : Supplying , providing and fixing stainless steel bain maire counter of size 1.45m × 0.65m × 0.85m with 2 nos of 1/1 gn pan, 4 nos of 1/2 gn pan including all its conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			63000.0000	63000.00	INR	Sixty Three Thousand Only
10.33	od17338/2021_2022 : Supplying, providing and fixing stainless steel coffee table of size 1.55m × 0.60m × 0.85m with a bottom shelf at a distance of 0.45m from the table top, and fixing a wall mountable wooden shelf of size 0.76m × 0.125m × 0.76m with backslash and all its fittings including conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			28000.0000	28000.00	INR	Twenty Eight Thousand Only

For Outlook Communications (P) Ltd.



Director

Devenesh
Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

10.34	od17339/2021_2022 : Supplying ,providing and fitting stainless steel juice making table of size 1.80m × 0.60m × 0.85m with a sink of dimension 0.60m × 0.45m on top (sunken) and a bottom shelf at a distance of 0.45m from the table top, backsplash and all its fittings including conveyance and placing at a suitable location instructed by the engineer in charge.	1.0000	each			16000.0000	16000.00	INR Sixteen Thousand Only
11	STEEL ALMIRAH							
11.01	od17452/2021_2022 : Supplying, Providing and fixing of Metal steel Almirah having dimensions 5ft x 3.3ft x 2ft. 2 door, 4 shelves including polishing fittings, all its conveyance and placing at a suitable location instructed by the engineer in charge. (18 gauge front and 20 gauge side and back) with all its fittings including all its conveyance and placing at a suitable location instructed by the engineer in charge.	4.0000	each			16000.0000	64000.00	INR Sixty Four Thousand Only
12	GENERATOR ROOM							
12.01	2.31 : Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth up to 30 cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared	6.0000	sqm			12.5500	75.30	INR Seventy Five and Paise Thirty Only
12.02	2.6.1 : Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5 m, disposed earth to be levelled and neatly dressed.All kinds of soil	2.8640	cum			181.8500	520.82	INR Five Hundred & Twenty and Paise Eighty Two Only
12.03	4.1.8 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:4:8 (1 cement : 4 coarse sand : 8 graded stone aggregate 40 nominal size)	0.5000	cum			5789.6000	2894.80	INR Two Thousand Eight Hundred & Ninety Four and Paise Eighty Only
12.04	4.1.2 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level:1:1/2:3 (cement : 1 1/2 coarse sand : 3 graded stone aggregate 20 mm nominal size)	3.1140	cum			7210.5500	22453.65	INR Twenty Two Thousand Four Hundred & Fifty Three and Paise Sixty Five Only
12.05	4.3.1 : Centering and shuttering including strutting, propping etc. and removal of form work for:Foundations, footings, bases for columns	7.1100	sqm			6788.6000	48266.95	INR Forty Eight Thousand Two Hundred & Sixty Six and Paise Ninety Five Only

For Outlook Communications (P) Ltd.

Director

Seenesh
Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.
Thiruvananthapuram - 695024

12.06	10.16.1 : Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Hot finished welded type tubes	125.0000	kg					143.4500	17931.25	INR Seventeen Thousand Nine Hundred & Thirty One and Paise Twenty Five Only
12.07	13.52.1 : Finishing with Epoxy paint (two or more coats) at all locations prepared and applied as per manufacturer's specifications including appropriate priming coat, preparation of surface, etc. complete. On steel work	2.5000	sqm					500.0000	1250.00	INR One Thousand Two Hundred & Fifty Only
12.08	12.48 : Providing & fixing on roof pressed clay tile (Mangalore tile) of 20 mm nominal thickness and of approved size and as per approved pattern on steel frame work complete (steel frame work to be paid separately)	4.9640	sqm					324.4000	1610.32	INR One Thousand Six Hundred & Ten and Paise Thirty Two Only
12.09	12.49 : Providing & laying on roof pressed clay tile ridge (Mangalore tile) of 20 mm thickness and of approved pattern on steel frame work complete (steel frame work to be paid separately).	6.0000	metre					72.2000	433.20	INR Four Hundred & Thirty Three and Paise Twenty Only
12.1	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo - Mechanically Treated bars of grade Fe-500D or more	93.4200	kilogram					83.5000	7800.57	INR Seven Thousand Eight Hundred and Paise Fifty Seven Only
13	CIVIL WORK FOR LAMP POST									
13.01	2.8.1 : Earth work in excavation by mechanical means (Hydraulic excavator) /manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, lift up to 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. All kinds of soil	0.8640	cum					252.3000	217.99	INR Two Hundred & Seventeen and Paise Ninety Nine Only
13.02	4.1.3 : Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level. 1:2:4 (cement : 2 coarse sand : 4 graded stone aggregate 20 mm nominal size)	1.1520	cum					6788.6000	7820.47	INR Seven Thousand Eight Hundred & Twenty and Paise Forty Seven Only
13.03	4.3.1 : Centering and shuttering including strutting, propping etc. and removal of form work for: Foundations, footings, bases for columns	0.5760	sqm					284.8500	164.07	INR One Hundred & Sixty Four and Paise Seven Only
13.04	5.22.6 : Steel reinforcement for R.C.C work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo - Mechanically Treated bars of grade Fe-500D or more	8.6400	kilogram					83.5000	721.44	INR Seven Hundred & Twenty One and Paise Forty Four Only
Total in Figure/look Communications (P) Ltd.								8027681.98		INR Eighty Lakh Twenty Seven Thousand Six
Quoted Rate in Words		INR Eighty Lakh Twenty Seven Thousand Six Hundred & Eighty One and Paise Ninety Eight Only								

Director

Chief Engineer

Kerala Irrigation Infrastructure
Development Corporation Ltd.